

2-2012

Calibrating the HSM Predictive Methods for Oregon Highways

Karen Dixon
Oregon State University

Christopher M. Monsere
Portland State University, monsere@pdx.edu

Fei Xie
Oregon State University

Kristie Gladhill
Portland State University

Follow this and additional works at: https://pdxscholar.library.pdx.edu/trec_reports



Part of the [Transportation Commons](#), [Urban Studies Commons](#), and the [Urban Studies and Planning Commons](#)

Let us know how access to this document benefits you.

Recommended Citation

Dixon, Karen, and Chris Monsere, Fei Xie and Kristie Gladhill. Calibrating the HSM Predictive Methods for Oregon Highways. OTREC-RR-12-02. Portland, OR: Transportation Research and Education Center (TREC), 2012. <https://doi.org/10.15760/trec.24>

This Report is brought to you for free and open access. It has been accepted for inclusion in TREC Final Reports by an authorized administrator of PDXScholar. Please contact us if we can make this document more accessible: pdxscholar@pdx.edu.



OREGON
TRANSPORTATION
RESEARCH AND
EDUCATION CONSORTIUM

FINAL REPORT

Calibrating the Future Highway Safety Manual Predictive Methods for Oregon State Highways

**OTREC-RR-12-02
February 2012**



RESEARCH

**CALIBRATING THE HIGHWAY SAFETY
MANUAL PREDICTIVE METHODS FOR
OREGON HIGHWAYS**

Final Report

**SPR 684
OTREC-RR-12-02**



ODOT/OTREC

This publication is a result of joint funding by
Oregon Department of Transportation
(ODOT) and Oregon Transportation Research
and Education Consortium (OTREC)



CALIBRATING THE FUTURE HIGHWAY SAFETY MANUAL PREDICTIVE METHODS FOR OREGON STATE HIGHWAYS

Final Report

**SPR 684
OTREC-RR-12-02**

by

Karen Dixon
Oregon State University

Chris Monsere
Portland State University

Fei Xie
Oregon State University

Kristie Gladhill
Portland State University

for

Oregon Department of Transportation
Research Section
200 Hawthorne Avenue SE, Suite B-240
Salem OR 97301-5192

and

Oregon Transportation Research
and Education Consortium (OTREC)
P.O. Box 751
Portland, OR 97207

February 2012

1. Report No. FHWA-OR-RD-12-07		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Calibrating The Future Highway Safety Manual Predictive Methods For Oregon State Highways				5. Report Date February 2012	
				6. Performing Organization Code	
7. Author(s) Karen Dixon, Oregon State University; Chris Monsere, Portland State University; Fei Xie, Oregon State University; Kristie Gladhill, Portland State University				8. Performing Organization Report No.	
9. Performing Organization Name and Address Oregon Department of Transportation Research Section and 200 Hawthorne Ave. SE, Suite B-240 Salem, Oregon 97301-5192 Oregon Transportation Research and Education Consortium (OTREC) P.O. Box 751 Portland, Oregon 97207				10. Work Unit No. (TRAVIS)	
				11. Contract or Grant No. SPR 684	
12. Sponsoring Agency Name and Address Oregon Department of Transportation Research Section and 200 Hawthorne Ave. SE, Suite B-240 Salem, OR 97301-5192 Federal Highway Administration 400 Seventh Street, SW Washington, DC 20590-0003				13. Type of Report and Period Covered Final Report	
				14. Sponsoring Agency Code	
15. Supplementary Notes					
16. Abstract The <i>Highway Safety Manual</i> (HSM) was published by the American Association of State Highway and Transportation Officials (AASHTO) in the spring of 2010. Volume 2 (Part C) of the HSM includes safety predictive methods which can be used to quantitatively estimate the safety of a transportation facility. The resulting information can then be used to provide guidelines to identify opportunities to improve transportation safety. The safety performance functions (SPFs) included with this content, however, were developed for several states other than Oregon. Because there are differences in crash reporting procedures, driver population, animal populations, and weather conditions (to name a few), the State of Oregon needs to use calibrated SPFs when applying the HSM procedures to local Oregon facilities. Currently, the predictive methods have been developed for three facility types: rural two-lane two-way roads, rural multilane roads, and urban and suburban arterial roads. In this project, the research team calibrated SPFs for all three facility types based on their historic safety performance in Oregon. The report illustrates methods of site selection, the collection of crash and site-specific data, and analysis methods for calibration. Also, the report includes an evaluation of the crash severity distribution methods. With this information, Oregon agencies can use the calibrated HSM predictive methods to assess expected facility safety performance for Oregon conditions and facility alternatives.					
17. Key Words SAFETY, MANUAL, HSM, SPF, OREGON, CRASH, MULTILANE, CALIBRATION, SEVERITY			18. Distribution Statement Copies available from NTIS, and online at http://www.oregon.gov/ODOT/TD/TP_RES/		
19. Security Classification (of this report) Unclassified		20. Security Classification (of this page) Unclassified		21. No. of Pages 98	22. Price

SI* (MODERN METRIC) CONVERSION FACTORS

APPROXIMATE CONVERSIONS TO SI UNITS					APPROXIMATE CONVERSIONS FROM SI UNITS				
Symbol	When You Know	Multiply By	To Find	Symbol	Symbol	When You Know	Multiply By	To Find	Symbol
<u>LENGTH</u>					<u>LENGTH</u>				
in	inches	25.4	millimeters	mm	mm	millimeters	0.039	inches	in
ft	feet	0.305	meters	m	m	meters	3.28	feet	ft
yd	yards	0.914	meters	m	m	meters	1.09	yards	yd
mi	miles	1.61	kilometers	km	km	kilometers	0.621	miles	mi
<u>AREA</u>					<u>AREA</u>				
in ²	square inches	645.2	millimeters squared	mm ²	mm ²	millimeters squared	0.0016	square inches	in ²
ft ²	square feet	0.093	meters squared	m ²	m ²	meters squared	10.764	square feet	ft ²
yd ²	square yards	0.836	meters squared	m ²	m ²	meters squared	1.196	square yards	yd ²
ac	acres	0.405	hectares	ha	ha	hectares	2.47	acres	ac
mi ²	square miles	2.59	kilometers squared	km ²	km ²	kilometers squared	0.386	square miles	mi ²
<u>VOLUME</u>					<u>VOLUME</u>				
fl oz	fluid ounces	29.57	milliliters	ml	ml	milliliters	0.034	fluid ounces	fl oz
gal	gallons	3.785	liters	L	L	liters	0.264	gallons	gal
ft ³	cubic feet	0.028	meters cubed	m ³	m ³	meters cubed	35.315	cubic feet	ft ³
yd ³	cubic yards	0.765	meters cubed	m ³	m ³	meters cubed	1.308	cubic yards	yd ³
NOTE: Volumes greater than 1000 L shall be shown in m ³ .									
<u>MASS</u>					<u>MASS</u>				
oz	ounces	28.35	grams	g	g	grams	0.035	ounces	oz
lb	pounds	0.454	kilograms	kg	kg	kilograms	2.205	pounds	lb
T	short tons (2000 lb)	0.907	megagrams	Mg	Mg	megagrams	1.102	short tons (2000 lb)	T
<u>TEMPERATURE (exact)</u>					<u>TEMPERATURE (exact)</u>				
°F	Fahrenheit	(F-32)/1.8	Celsius	°C	°C	Celsius	1.8C+32	Fahrenheit	°F

*SI is the symbol for the International System of Measurement

ACKNOWLEDGEMENTS

The authors thank the members of the Oregon Department of Transportation (ODOT) Project Technical Advisory Committee for their advice and assistance in the preparation of this report. The authors would also like to thank the Oregon Transportation Research and Education Consortium (OTREC) for funding the project and the ODOT Research group for managing the project.

DISCLAIMER

The contents of this report reflect the views of the authors, who are solely responsible for the facts and the accuracy of the material and information presented herein. This document is disseminated under the sponsorship of the U.S. Department of Transportation University Transportation Centers Program and Oregon Department of Transportation in the interest of information exchange. The U.S. Government and the Oregon Department of Transportation assume no liability for the contents or use thereof. The contents do not necessarily reflect the official views of the U.S. Government or Oregon Department of Transportation. This report does not constitute a standard, specification, or regulation.

This document is disseminated under the sponsorship of the Oregon Department of Transportation and the United States Department of Transportation in the interest of information exchange. The State of Oregon and the United States Government assume no liability of its contents or use thereof.

TABLE OF CONTENTS

1.0	INTRODUCTION.....	1
2.0	LITERATURE REVIEW	3
2.1	PREDICTIVE METHODS IN THE HIGHWAY SAFETY MANUAL	3
2.2	CRASH REPORTING IN OREGON.....	4
2.3	AADT MODELS FOR RURAL LOCATIONS.....	5
3.0	SITE SELECTION	7
3.1	SAMPLE SIZE.....	7
3.2	ROADWAY SEGMENT SELECTION.....	8
3.2.1	<i>Rural Two-Lane, Two-Way Undivided Road Site Selection</i>	<i>9</i>
3.2.2	<i>Rural Multilane Undivided Highways Site Selection.....</i>	<i>10</i>
3.2.3	<i>Rural Multilane Divided Highways Segment Selection</i>	<i>10</i>
3.2.4	<i>Urban and Suburban Arterial Segment Selection.....</i>	<i>10</i>
3.3	INTERSECTION SITE SELECTION	10
3.3.1	<i>Rural Intersection Site Selection -- General Method.....</i>	<i>11</i>
3.3.2	<i>Rural Two-lane Two-Way Four-leg Signalized Intersections Site Selection</i>	<i>12</i>
3.3.3	<i>Urban Intersection Site Selection</i>	<i>12</i>
3.4	SITE SELECTION SUMMARY	13
4.0	DATA COLLECTION	15
4.1	HISTORIC CRASH DATA	15
4.2	ROAD CHARACTERISTIC DATA	15
4.2.1	<i>Required Data Elements</i>	<i>15</i>
4.2.2	<i>Data Collection Process – Rural.....</i>	<i>16</i>
4.2.3	<i>Data Collection Process – Urban.....</i>	<i>20</i>
4.3	DATA COLLECTION SUMMARY	23
5.0	DATA ANALYSIS	25
5.1	DIVIDING ROADWAY SITES INTO HOMOGENEOUS SEGMENTS.....	25
5.2	CRASH ASSIGNMENT.....	26
5.2.1	<i>Assigning Crashes to Roadway Segments</i>	<i>27</i>
5.2.2	<i>Assigning Crashes to Intersection Sites.....</i>	<i>27</i>
5.3	MINOR AADT ESTIMATION MODEL-RURAL	28
5.3.1	<i>Response Variable and Independent Variables</i>	<i>28</i>
5.3.2	<i>Correlation between Variables.....</i>	<i>29</i>
5.3.3	<i>Variable Selection.....</i>	<i>29</i>
5.3.4	<i>Final AADT Estimation Model</i>	<i>30</i>
5.4	MINOR AADT ESTIMATION - URBAN	31
5.5	DEVELOPING CALIBRATION FACTORS.....	31
5.5.1	<i>Unadjusted Predicted Crashes</i>	<i>32</i>
5.5.2	<i>Example of predicted crash calculations.....</i>	<i>33</i>
5.5.3	<i>Calculation of Calibration Factors</i>	<i>36</i>
5.5.4	<i>Locally-Derived Values</i>	<i>36</i>
5.6	SUMMARY OF DATA ANALYSIS	42

6.0	CALIBRATION RESULTS.....	43
6.1	CALIBRATION FACTORS BASED ON DEFAULT PROPORTIONS	43
6.2	DEFAULT PROPORTIONS VERSUS LOCALLY-DERIVED PROPORTIONS	46
6.3	CALIBRATION FACTORS FOR TOTAL CRASHES VERSUS FATAL PLUS INJURY CRASHES .	48
6.4	CALIBRATION FACTORS FOR TOTAL CRASHES BY GEOGRAPHIC REGION	51
6.5	SUMMARY OF CALIBRATION RESULTS	52
7.0	CONCLUSIONS	53
7.1	DATA COLLECTION ISSUES	53
7.2	CALIBRATION FACTORS	54
7.3	FUTURE WORK.....	55
8.0	REFERENCES.....	57
APPENDIX A – ABBREVIATION TABLE		
APPENDIX B – LOCALLY-DERIVED VALUES		

LIST OF FIGURES

Figure 4.1:	ODOT Digital Video Log Screenshots	19
Figure 4.2	Google Earth View of Sample Rural Intersection.....	19
Figure 4.3:	Google Data File Markup of Driveways on Urban Corridor	20
Figure 4.4:	Google Earth Sample Urban Intersection with Buffers of 250 and 1000 feet	22
Figure 5.1:	Histogram of Urban Arterial Segment Length.....	26
Figure 5.2:	C_p Plot.....	30
Figure 6.1:	Climate Zones, Oregon	51

LIST OF TABLES

Table 1.1: HSM Safety Performance Functions	1
Table 3.1: Sample Size by Facility Type	8
Table 3.2: Simplified Lane Report	9
Table 4.1: Required Data Elements	16
Table 4.2: Example of Horizontal Curve Report	17
Table 4.3: Example Vertical Grade Report	18
Table 4.4: Data Elements and Available Resources	24
Table 5.1: Independent Variables for Minor AADT Estimation Models	28
Table 5.2: Variance Inflation Factors for Independent Variables	29
Table 5.3: Regression for Candidate Models	31
Table 5.4: Example Road Characteristic Data for Segments	34
Table 5.5: Example of Calculation Spreadsheet for Estimating Predicted Crashes	35
Table 5.6: HSM Tables or Equations for Which Local Calibration is Possible	38
Table 5.7: HSM-Default Crash Severity Levels versus Oregon Levels (2004-2006) for Rural Two-Lane, Two-Way Roads	39
Table 5.8: HSM-Default Collision Distributions versus Oregon Distributions (2004 -2006) for Rural Two-Lane, Two-Way Roads	39
Table 5.9: HSM-Default Nighttime Proportions versus Oregon Proportions (2004 - 2006) for Rural Two-Lane, Two-Way Roads	40
Table 5.10: Nighttime Crash Proportions for Unlighted Urban Roadway Segments (2004 -2006)	40
Table 5.11: Distribution of Multiple-Vehicle Nondriveway Collisions for Roadway Segments by Manner of Collision Type (2004 -2006)	41
Table 5.12: Proportion of Pedestrian Accidents by Roadway Segment Type (2004-2006)	41
Table 5.13: Local Proportions of Crashes by Intersection Type (2004-2006)	42
Table 6.1: Estimated Calibration Factors for Oregon (based on HSM default crash proportions)	45
Table 6.2: Initial Comparison: HSM Default Proportions versus Locally-Derived Proportions (for each year) – Rural Facilities	46
Table 6.3: Second Comparison: HSM Default Proportions versus Locally-Derived Proportions (average of three years) – Rural Facilities	46
Table 6.4: Third Comparison: HSM Default Proportions versus Locally-Derived Proportions (three years then averaged) – Rural Facilities	47
Table 6.5: Fourth Comparison: HSM Default Proportions versus Locally-Derived Proportions (three years) – Urban and Suburban Facilities	47
Table 6.6: Calibration Comparison for Total Crashes versus Fatal plus Injury (Rural Two-Lane, Two-Way Roads) Using HSM-Proportional Values	48
Table 6.7: Calibration Comparison for Total Crashes versus Fatal plus Injury (Rural Multilane Highways) Using HSM-Proportional Values	49
Table 6.8: Calibration Comparison for Total Crashes versus Fatal plus Injury (Urban and Suburban Intersections)	50
Table 6.9: Calibration Comparison for Total Crashes versus Fatal plus Injury (Urban and Suburban Arterials)	50
Table 6.10: Calibration Comparison for Total Crashes by Climate Zone (Urban and Suburban Arterials) Using HSM-Default Values	52
Table 7.1: Recommended Oregon HSM Calibration Factors (based on locally derived crash proportions)	55

EXECUTIVE SUMMARY

The *Highway Safety Manual* (HSM) was published by the American Association of State Highway and Transportation Officials (AASHTO) in the spring of 2010. Volume 2 (Part C) of the HSM includes safety predictive methods which can be used to quantitatively estimate the safety of a transportation facility. The resulting information can then be used to provide guidelines to identify opportunities to improve transportation safety. The safety performance functions (SPFs) included with this content, however, were developed for several states other than Oregon. Because there are differences in crash reporting procedures, driver population, animal populations, and weather conditions (to name a few), the State of Oregon needs to use calibrated SPFs when applying the HSM procedures to local Oregon facilities. Currently, the predictive methods have been developed for three facility types: rural two-lane two-way roads, rural multilane roads, and urban and suburban arterial roads. In this project, the research team calibrated SPFs for all three facility types based on their historic safety performance in Oregon. The report illustrates methods of site selection, the collection of crash and site-specific data, and analysis methods for calibration. Also, the report includes an evaluation of the crash severity distribution methods. With this information, Oregon agencies can use the calibrated HSM predictive methods to assess expected facility safety performance for Oregon conditions and facility alternatives.

1.0 INTRODUCTION

Volume 2 of the recently published *Highway Safety Manual* (HSM) includes safety predictive methods which can be used to quantitatively estimate the safety of a transportation facility. The resulting information can then be used to provide guidelines to identify opportunities to improve transportation safety. The safety performance functions (SPFs) included with this content, however, were developed for several states other than Oregon. Because there are differences in crash reporting procedures, driver population, animal populations, and weather conditions (to name a few), the State of Oregon needs to use calibrated SPFs when applying the HSM procedures for local Oregon facilities. Therefore, the goal of this research project was to calibrate the HSM predictive method SPFs for conditions in the State of Oregon.

In the HSM predictive methods, the total expected crash frequencies for a facility are estimated by combining SPFs and crash modification factors. The SPFs are first used to calculate estimated crash frequency for a base condition. Next, the estimates are modified by applying crash modification factors (CMFs) to address non-base condition characteristics for specific segment and intersection locations. The predictive method can be used to estimate safety separately for intersections and segments. Currently, the HSM includes predictive methods for rural two-lane two-way roads; rural multilane highways, and urban and suburban arterials. All associated SPFs for these facility types should be calibrated. This project includes development of the associated segment and intersection type SPFs shown in Table 1.1. This table shows the specific SPFs included in the HSM and calibrated for Oregon conditions as a result of this research effort. In addition, there are a number of default crash distributions and parameters that can be calculated for the local conditions (these are shown later in Table 5.6)

Table 1.1: HSM Safety Performance Functions

Facility Type	Segment Types	Intersection Types
Rural Two-Lane, Two-Way Roads	Undivided (R2)	Three-Leg Stop (R3ST) Four-Leg Stop (R4ST) Four-Leg Signalized (R4SG)
Rural Multilane Highways	Undivided (MRU) Divided (MRD)	Three-Leg Stop (MR3ST) Four-Leg Stop (MR4ST) Four-Leg Signalized (MR4SG)
Urban and Suburban Arterials	Two-lane undivided (2U) Three-lane includes two-way left-turn lane [TWLTL] (3T) Four-lane undivided (4U) Four-lane divided (4D) Five-lane includes a TWLTL (5T)	Three-Leg Stop (U3ST) Four-Leg Stop (U4ST) Three-Leg Signalized (U3SG) Four-Leg Signalized (U4SG)

In this report, the authors provide a brief review of the applicable literature (see Chapter 2.0). Since the primary focus of the effort described in this report is the calibration of the HSM SPFs for Oregon conditions, the applicable literature is minimal and simply introduces the HSM procedure, provides a quick overview of Oregon crash reporting information, and presents

information about an Indiana study where the researchers developed a model to estimate rural intersection annual average daily traffic (AADT). This background content is necessary because there is very little AADT data for Oregon rural intersection cross street locations, so one task performed by the research team and later included in Chapter 5.0 is the estimation of an Oregon AADT model that builds on the Indiana research.

Chapter 3.0 reviews the project approach for site selection for the rural and urban facilities. Included in Chapter 4.0 is a summary of data collection methods for crash data and road characteristic data for the State of Oregon.

Chapter 5.0 reviews the data analysis performed by the project team that ultimately resulted in the calibration factors included in Chapter 6.0. In addition to a summary of conclusions (Chapter 7.0) and a list of references (Chapter 8.0), the report also includes an abbreviation table (see Appendix A) and numerous tables depicting the locally-derived crash values used by the HSM procedures (see Appendix B).

2.0 LITERATURE REVIEW

A brief review of the HSM predictive method is necessary to establish a context for the remaining content in this report. As a result, this section reviews the basic approach presented in the HSM (*AASHTO 2010*) and demonstrates the role calibration plays in this analysis procedure. In addition, the literature briefly reviews potential influencing issues about the Oregon crash reporting procedures. This section of the report concludes with a review of an AADT estimation model developed in Indiana. This content serves as a foundation for an additional AADT estimation applied to Oregon conditions.

2.1 PREDICTIVE METHODS IN THE HIGHWAY SAFETY MANUAL

In 2010, AASHTO published the first edition of HSM. The HSM contains four basic sections (referred to as Parts A, B, C, and D). Part A includes an introduction to the manual, a review of human factor issues critical to highway safety, and a safety fundamentals chapter. Part B introduces the various components that collectively make up the roadway safety management process. Part C, the focus of this research effort, provides key content that comprises the new HSM safety predictive methods. An appendix to Part C reviews how these predictive methods and their associated SPFs can and should be calibrated to reflect local or regional conditions. Part D of the HSM provides a catalog of high quality crash modification factors (CMFs).

The predictive models in Part C were developed based on historic site and crash data from select states. The research effort summarized in this report describes the calibration of these safety functions for conditions unique to state highways in Oregon. As an introduction to this calibration process, it is necessary to review the general HSM predictive estimation method and identify the calibration requirements for the various types of highway facilities. The predictive model initially estimates the predicted total crash frequency for a particular facility type, N_{spf} , for a target year based on traffic volume and a set of base site conditions. Equation 2-1 demonstrates how this generic crash frequency value can then be modified for unique site characteristics using CMFs and a calibration factor, C .

Equation 2-1: HSM Crash Prediction Method

$$N_{predicted(adjusted)} = N_{spf} \times (CMF_1 \times CMF_2 \times \dots \times CMF_n) \times C \quad (2-1)$$

Where:

- $N_{predicted(adjusted)}$ = adjusted total predicted crash frequency,
- N_{spf} = total predicted crash frequency under base condition,
- CMF_1, \dots, CMF_n = Crash Modification Factors, and
- C = Calibration Factor.

In Equation 2-1, N_{spf} is calculated using SPFs for the various facility types. The HSM SPFs are separated into segment and intersection models. For roadway segments, the SPF input variables include roadway length and AADT of the road segment. For intersections, the SPF input variables are the AADT values for the major and minor road.

The CMFs used in Equation 2-1 are included in the predictive method chapters of the HSM. These multiplicative CMFs are used to adjust for site characteristics that are different from the base conditions for the selected SPF. The CMFs are provided relative to the base condition. Thus, if a CMF has a value of 1.0, the associated road feature or countermeasure present at the site is equal to the base condition and will not influence the expected number of crashes (i.e. multiplying by 1.0 does not change the crash frequency estimate). If the CMF has a value less than 1.0, the associated road feature or countermeasure represented by this CMF is expected to result in fewer crashes than represented by base conditions. Finally, if the CMF value is greater than 1.0, the associated road feature or countermeasure can be expected to increase the number of crashes.

The predictive methods in the first edition of HSM can estimate a range of crash frequency conditions. The predictive methods for rural two-lane, two-way roads estimate total crash frequency and do not have SPFs based on injury level. To overcome this limitation, the analyst can apply expected crash proportions for injury levels by using those included in the HSM (based on California and Washington injury distributions) or by using locally derived crash injury proportions. The predictive methods for rural multilane highways include SPFs based on total crash frequency and injury level. CMFs for rural multilane four-leg signalized intersections (MR4SG), however, are not currently available. Predictive methods for urban and suburban arterials include crash frequency and severity. These models also help estimate expected crash conditions for pedestrian and bicycle collisions. As previously shown, Table 1.1 depicts the various SPFs included in the HSM and that have been calibrated as part of this research effort.

2.2 CRASH REPORTING IN OREGON

Several Oregon-specific characteristics indicate that the reported crash history for Oregon may differ from other states. One of these specific differences is the fact that Oregon crashes are self-reported. This means that when a person is involved in a crash and there are no injuries as a result of the crash, the individual drivers must prepare the crash reports (law enforcement officers do not generally respond to the crash location and, if they do, are only required to submit a crash report if they prepare a formal police report).

In addition to the self-reporting difference, Oregon also has different crash reporting thresholds than their neighboring states to the north and south (the states for which injury proportions are included in the HSM). For example, if a driver is involved in a crash which causes injury, death, more than \$1,500 damage to vehicles, or more than \$1,500 damage to vehicles and towing of another vehicle, the driver must file an Oregon Traffic Accident and Insurance Report within 72 hours. As a result, many property-damage-only (PDO) crashes are not reported in Oregon if their value is below the \$1,500 threshold. By comparison, the reporting thresholds for Washington and California are \$700 and \$750 respectively for PDO crashes (*California Department of Motor Vehicles 2011, Washington State Highway Patrol 2006*).

2.3 AADT MODELS FOR RURAL LOCATIONS

Ideally, calibration for a jurisdiction should be based on field data for the entire sample size; however, some of the variables included in the predictive method are not readily available in many state databases and must either be simplified (using a default value) or estimated using known data for a sub-set of the locations. For this research effort, the project team determined that the minor AADT values for rural intersections are rarely available. Many of these locations are remote with low traffic volume, while some of these rural intersections are in close proximity to developed regions or freeways. Though this AADT information may not always be available, the authors identified one effort that estimated intersection AADT values for the State of Indiana.

Mohamad et al. (1998) developed an AADT prediction model for county roads in Indiana. They collected field data from 40 different Indiana counties. The Indiana researchers generated an AADT model with multiple linear regression techniques. They also evaluated a variety of candidate explanatory variables and, based on the scatter of their field data, transformed the response variable (AADT) to a log10 configuration. The Indiana researchers determined that the AADT values for county highways were dependent on the road location (rural versus urban). They also discovered that critical variables included easy access to a major highway, total state highway mileage for a county, and the total arterial mileage of a county. The procedures used for evaluation and estimation of AADT for Indiana provided a basis for an estimation for rural Oregon AADT values that is presented later in this report.

3.0 SITE SELECTION

The research team developed a method for selecting candidate sites as an initial step in performing the Oregon calibration procedure. The calibration guidance in the HSM provides a target number of sites and crashes; however, in some cases a facility may have a low crash frequency and applying the generic sample sizes recommended in the HSM may not be practical due to the low crash frequency for the location or facility type. As a result, the project team based site selection and sample size on the facility type, historic crashes for similar facilities, and random sampling procedures. This chapter presents the sample size, sampling procedures, segment site selection, and intersection site selection for the various SPFs included in the HSM. In an effort to demonstrate sample selection of a facility that may be under-represented for historic crash conditions, the authors demonstrate the sample selection procedure applied to the four-leg rural signalized intersection (R4SG) locations.

3.1 SAMPLE SIZE

The HSM recommends that sample size for calibration procedures should include 30 to 50 locations. The manual also emphasizes that these sites should be randomly selected and, upon initial selection, the analyst should determine the number of crashes per year. In general, the HSM recommends each facility type should have approximately 100 crashes per year and the study period should be multiple years (*AASHTO 2010*). If one facility type has fewer than 30 sites, all sites should be included for calibration purposes. As previously indicated, select facility types may have very few actual recorded crashes and increasing the sample size until it includes 100 crashes per year could require a disproportionately large sample size that may not be necessary for proper calibration. Where possible, the Oregon team increased the number of sites to a sample size of 100 locations (the three-leg stop controlled rural multilane intersection is such an example). Since the rural two-lane two-way road is a common Oregon highway facility type, the project team increased the sample sizes for the three-leg and four-leg stop control intersections (R3ST and R4ST respective) to 200 locations. In urban areas, the HSM procedures require creating segment breaks at every intersection. Since most urban crashes occur at intersections, the short segments and low crash frequency required sampling a large number of “sites”. Table 3.1 shows sample sizes for the Oregon facility types included in this analysis.

For the Oregon calibration effort, the project team used random site selection for facilities located on the state highway systems. Though there may be some differences in state highway facilities and those maintained by local jurisdictions, the analysis focused on the state facilities because these state-maintained highways have a more comprehensive data set available for road characteristics. For a select number of facilities that did not have a large state-maintained sample size, the project team extended the analysis on a limited basis to other non-state-maintained locations. The selection for roadway segments differed from that for intersections. This is further discussed in the following section. For locations with very limited crash history, the project team modified the sample size (using sampling statistical procedures based on typical crash

frequency). One example location is the rural four-leg signalized intersection. Locations where the sample size requirements were modified are further reviewed in the following section.

Table 3.1: Sample Size by Facility Type

Facility Type		Sample Size (Sites)
Rural Two-Lane, Two-Way Roads		
Segments		
R2	2-lane undivided	75
Intersections		
R3ST	3-leg, minor STOP	200
R4ST	4-leg, minor STOP	200
R4SG	4-leg, signalized	25
Rural Multilane Highways		
Segments		
MRU	4-lane undivided	50
MRD	4-lane divided	19
Intersections		
MR3ST	3-leg, minor STOP	100
MR4ST	4-leg, minor STOP	107
MR4SG	4-leg, signalized	34
Urban and Suburban Arterials		
Segments		
2U	2-lane undivided	491
3T	3-lane with TWLTL	205
4U	4-lane undivided	375
4D	4-lane divided	86
5T	5-lane with TWLTL	323
Intersections		
U3ST	3-leg, minor STOP	73
U4ST	4-leg, minor STOP	48
U3SG	3-leg, signalized	49
U4SG	4-leg, signalized	57

3.2 ROADWAY SEGMENT SELECTION

The HSM (2010) predictive methods address three specific road configurations. First, the rural two-way two-lane road category (designated as R2) includes an undivided segment safety performance function as well as intersection SPFs. The rural multilane highway includes undivided and divided segments (designated as MRU and MRD respectively) as well as associated intersection SPFs. The urban and suburban arterial also includes undivided two-lane and four-lane segments (designated as 2U and 4U respectively) as well as a four-lane divided segment (4D) and a three-lane and five-lane section with a center TWLTL (3T and 5T respectively). There are also four associated urban intersections SPFs. The site selection process

varied for the different road types. This section describes the site selection procedure for the rural two-lane, rural multilane, and urban and suburban arterials sites.

3.2.1 Rural Two-Lane, Two-Way Undivided Road Site Selection

The research team used randomly selected sites for the R2 category that were previously identified for a recent Oregon research project that focused on rural two-lane roads (*Dixon and Rohani 2008*). To develop the database, that research team used the Functional Classification and National Highway System Status on Oregon State Highways (ORStateHwysFCandNHS) (<http://www.oregon.gov/ODOT/TD/TDATA/rics/FunctionalClassification.shtml>) to select rural state highways. Next, they used the Lane Report (http://www.oregon.gov/ODOT/TD/TDATA/otms/OTMS_Highway_Reports.shtml) to select rural two-lane two-way roadways. Table 3.2: depicts a simplified example of data included in the ODOT lane report for HWY092 [Milepoint (MP) from 41.65 to 39.65]. For the data shown in this table, only locations with intersections or where physical geometric dimensions changed are depicted.

Table 3.2: Simplified Lane Report

Mile Point	Intersection or Landmark	Lane Width (ft)						Shoulder Type	Shoulder Width (ft)		Median	
		6	5	4	3	2	1		Lt	Rt	Type	Width (ft)
Highway #: 092 Lower Columbia River Highway												
41.65	Begin Segment	0	0	0	0	12	12	Paved	6	7	0	0
40.80	Neer City Rd	0	0	0	0	12	12	Paved	6	6	0	0
40.76	--	0	0	0	0	12	12	Paved	6	6	0	0
40.47	Nicolai/Moorage Rd.	0	0	0	0	12	12	Paved	6	6	0	0
40.16	--	0	0	0	0	12	12	Paved	6	6	0	0
40.13	--	0	0	0	0	12	12	Paved	7	7	0	0
39.91	Jaquish/Wilbur Rd.	0	0	0	0	12	12	Paved	7	7	0	0
39.87	--	0	0	0	0	12	12	Paved	6	8	0	0
39.65	End Segment	0	0	0	0	12	12	Paved	6	8	0	0

In the lane report, the lane width category includes six possible lanes and their associated widths. As can be expected, rural two-lane two-way roads should typically have only two lanes. A value of zero in a lane width column indicates that lane does not exist. Median type indicates the presence and type of median. Since the HSM SPFs for R2 segments do not include roadways with medians, the median type and width should have values of zero as shown.

For inclusion in the study, the project team listed all rural two-way two-lane roadway segments and subdivided them into segment lengths of approximately two miles. Each segment length was represented by a number and then the numbers were randomly selected (resulting in randomly selected two-mile road corridors). Finally, the project team selected 75 of the approximately two-mile long segments to include in the calibration analysis data set and determined the crash history of the selected locations. The total selected sites experienced, on

average, 131 crashes per year. The HSM calibration procedure recommends verifying that the data is represented by at least 100 crashes per year, so the randomly selected data set of 75 two-mile long segments fulfilled this criterion.

3.2.2 Rural Multilane Undivided Highways Site Selection

The selection of multilane rural undivided (MRU) segments was similar to the method used for the R2 segments. Instead of two lane segments, the project team used the lane reports and functional classification to identify four-lane candidate segments without medians. For the multilane rural highway segments identified in the state database, many of these locations were in the proximity of rural towns and their associated segment length was considerably shorter. In an effort to prevent the introduction of bias by including extremely short segments, only multilane segments 0.5 miles or longer were included in the dataset. Any of the segments that were longer than 2.5 miles were subdivided with a target of two-mile segment lengths where feasible. Finally, the project team randomly selected 50 roadway segments from the total population. These segment locations had, on average, 121 crashes per year.

3.2.3 Rural Multilane Divided Highways Segment Selection

In the State of Oregon, only a limited number of rural multilane highways have been constructed with a median. As a result, the selection method the project team used for the rural multilane divided highways (MRD) included identification of segments using the Oregon Department of Transportation (ODOT) resources previously indicated and then a selection of all qualifying segments for the data set. The resulting MRD database consisted of 19 roadway segments of varying length with a total combined length of 8.27 miles.

3.2.4 Urban and Suburban Arterial Segment Selection

The selections for urban and suburban arterials were similar to the process for identifying candidate segments, though a GIS-based method was used to identify the sample pool to accurately represent urban boundaries. The state highway network was spatially joined with urban area boundaries to identify candidate sections of highway. This resulted in 289.71 miles of highway available for using for selection. The highway segments were joined with the roadway inventory database and preliminarily classified as type 2U, 3T, 4U, 4D, 5T based on number of lanes and median type. The candidate highways were then segmented (in an automated fashion) based on changes in other variables as specified in the HSM. Next, the research team randomly sampled these segments with the objective of obtaining 100 reported crashes per year for each facility type. Once a facility type reached this threshold, the analysts stopped sampling.

3.3 INTERSECTION SITE SELECTION

The selection of candidate Oregon intersections for this calibration effort required that the research team identify a large number of intersection types for each road type. For the rural two-lane road environment, the SPFs had to be calibrated for the rural three-leg and four-leg STOP controlled intersections (R3ST and R4ST respectively) as well as for the four-leg signalized intersection (R4SG). Similarly, for the rural multilane highway environment, the associated

HSM SPFs included the multilane rural three-leg STOP, four-leg STOP, and four-leg signalized intersections (MR3ST, MR4ST, and MR4SG respectively). Finally for the urban and suburban arterial SPFs, the associated intersections include the three-leg STOP (U3ST), four-leg STOP (U4ST), three-leg signalized (U3SG), and four-leg signalized (U4SG) intersections.

The site selection method for this wide variety of intersections varied based on the data format, site conditions, and total available number of candidate intersections. In the following sections, these various methods for intersection site selection are reviewed.

3.3.1 Rural Intersection Site Selection -- General Method

For initial intersection identification at rural locations, the ODOT lane report includes general intersection information that identifies the milepoint as well as the basic intersection orientation (T-intersection versus cross-intersection, signalized versus other traffic control device configuration); however, prior to incorporating an intersection into the analysis the project team confirmed the traffic control device as well as intersection orientation using the ODOT video log supplemented by on-line aerial photographs.

The project team then randomly selected each study intersection from the resulting database of candidate intersection types. Following the initial selection of 30 sites, the team members then verified whether the selected sites represented the HSM crash history target of 100 crashes per year. If the historic crash target resulted in values less than 100 crashes per year, additional sites were then selected. During this process, it became apparent that certain intersection types do not have a substantial number of crashes and that the 100 crash target merits additional consideration to more directly represent the expected number of crashes for each facility type.

The STOP-controlled intersections (R3ST, R4ST, MR3ST and MR4ST) experienced a small number of reported crashes in Oregon; therefore, alternative sample sizes are appropriate for these facilities. For example, the crash frequency for the MR3ST intersection is consistently small, so the project team used a sample size of 100 sites (more than twice the HSM recommendation) so as to capture additional crashes. The rural two-lane intersection locations experienced very few crashes. Since R3ST and R4ST are typical intersection types for a rural highway system and additional intersections could be easily identified, the research team increased the sample size for these two STOP-controlled intersection types to 200 locations. In the Oregon database there are only 107 MR4ST intersections, all 107 intersections were included in the MR4ST sample. Similarly, for intersection types that exist in a limited number, when the target number of intersections or crashes could not be achieved the study included the entire population for that type of intersection. As a result, since there are only 25 R4SG and 34 MR4SG intersections in Oregon, all these intersections were included in the data base. The 25 R4SG intersections are further reviewed in Section 3.3.2.

3.3.2 Rural Two-lane Two-Way Four-leg Signalized Intersections Site Selection

As indicated in the overview for intersection site selection (see Section 3.3.1), the project team included 25 R4SG intersections in the study sample. According to the ODOT database, there are actually only 19 R4SG intersections located along rural state highways in Oregon. Since the HSM recommends that calibration should be performed on all available intersections for a specific intersection type if the target sample size cannot be achieved, the project team explored two-lane rural road locations that are not on the state highway system for Oregon to see if comparable county road locations could be identified. Currently, there is not a comprehensive road characteristic database for Oregon highways not on the state system, so members of the project team used geographic information system (GIS) programs to search for this intersection type.

All of the known 19 R4SG state-system intersections share the characteristic that they are located in the vicinity of towns or cities. Therefore, the project team extended the intersection search to county roads in the proximity of cities and identified 6 additional R4SG intersections located along county highways. These additional intersections increased the 19 state-system-only R4SG intersection set to a total of 25 state and county target intersections. The project team further evaluated select county aerial photographs to confirm that the GIS selection method identified all available county R4SG intersections. The authors systematically selected 14 counties and visually searched all areas in these counties. They then compared their findings to those from the GIS search for the same counties and were not able to identify any additional candidate intersections. This supplemental search confirmed, therefore, that the GIS search procedure provided representative results and that the calibration database could now be reasonably considered to include all available candidate R4SG intersections.

3.3.3 Urban Intersection Site Selection

The research team determined that the most comprehensive data for urban AADT values was available in a statewide layer of functionally classified roads. Using GIS, they created a layer of the functionally classified intersections (11,131 intersections). This layer was spatially intersected with the urban state highway layer to identify intersections on urban state highways. This list was then filtered for locations with recent volume estimates on the minor approaches. This resulted in a candidate pool of 2,671 intersections (171 of which were state highway-to-state highway intersections). The team then randomly selected intersections from this list. As each intersection was selected, the researchers confirmed the volume on all minor and major legs. If the volume data did not meet criteria, an attempt was made to gather more recent data. If more recent data could not be identified, the intersection was not selected. The research team then used the Digital Video Log and aerial photography to confirm that all legs are two-way streets (one-way legs are not included in the HSM) and to classify the intersection as either three-leg STOP (U3ST), four-leg STOP (U4ST), three-leg signalized (U3SG), or four-leg signalized (U4SG) intersections. The research team assessed the crash count of the intersection group to confirm the 100 reported crashes per year threshold.

3.4 SITE SELECTION SUMMARY

The selection of representative segment and intersection locations for calibration efforts is critical to effective SPF calibration. During the data collection stages of this project, the research team identified a few elements that merit further consideration during future calibration efforts as well as for future enhancements to the HSM overall procedures.

First, random selection of sites is critical so that an agency can confidently state that the calibration factors are representative of the larger road population. Developing a calibration database could be expedited if the site selection focuses on high-crash locations since this would result in a smaller sample size; however, such a selection procedure would bias the results. Similarly, segments and intersections that are randomly selected and do not have any recent crash history are also critical to precise SPF calibration. To adequately represent diverse rural regions, the random selection of rural sites should also extend to good geographic representation of the target region, so a secondary site selection step for these rural locations confirmed this diverse geographic representation of the study sample.

A second and more significant item identified during the site selection process is that the HSM sample size and minimum crash thresholds appear to be somewhat arbitrary and merit additional enhancements. For example, the number of segment crashes for rural two-lane roads can be easily identified and achieved if a jurisdiction has a large rural area; however, the 100 crashes per year should be facility-specific. The criteria for identifying 100 crashes per year for a rural multilane signalized intersection, for example, may not be indicative of the number of crashes that can be expected per year for such facilities. In other words, if you select 50 sites and they must have a total of approximately 100 crashes per year this equates to at least two crashes per site per year on average. Some locations such as the rural three-leg STOP controlled intersections do not typically experience this number of crashes while other locations such as urban signalized intersections would be expected to have a number of annual crashes much greater than two. Future enhancements to the calibration procedure should target sample sizes representative of the expected number of crashes for a particular type of facility.

For this research effort, the project team has attempted to adhere to the HSM recommended thresholds where possible. The procedure for site selection, however, could have been potentially streamlined if site-specific thresholds are developed and then expanded into appropriate sample size estimates.

4.0 DATA COLLECTION

As a fundamental component of site selection data collection, the calibration procedure requires the collection of historic crash data for at least a three year period. For the calibration effort reviewed in this report, the project team used crash information for the years from 2004 to 2006. In addition to the historic crash information, successful calibration requires comprehensive road characteristic data. The data collection effort for these two types of data is reviewed in this section of the report.

4.1 HISTORIC CRASH DATA

The research team obtained historic crash data for the year 2004 to 2006 from the Oregon Department of Transportation's Statewide Crash Data System (CDS). When the project started, the 2007 and later crash data was not yet available so the selected time period represented the most recent crash data at that time. For non-intersection roadway segments, all crashes that occurred within the site limits classify as segment crashes. For intersections, the HSM indicates that crashes that occurred within the physical limits of the intersections as well as associated crashes located on the intersection approach legs (within 250 feet (15.3m)) should be included in the analysis. The project team then further evaluated the crashes that were located on the intersection approach legs to determine if they qualified as intersection-related crashes.

The data for each crash included a unique crash identity number, the crash type and collision type, character of roads, intersection-related as designated by reporting officers, direction from intersection, and direction of travel. The data also included the severity level for each crash. This information was critical so that the team could obtain calibration factors for SPFs for fatal and injury crashes.

4.2 ROAD CHARACTERISTIC DATA

Each SPF and associated road or intersection type requires specific site information for successful application to the calibration procedure. In this section, the report summarizes this required road characteristic data. In addition, this section of the report summarizes the data collection procedures used to acquire the necessary road characteristic data.

4.2.1 Required Data Elements

For each road segment and intersection SPF, specific data elements are required; however, these key data elements vary for the different facility types. All road characteristic data needed for calibration for the various facility types are listed in Table 4.1. The HSM includes recommendations about ways to simplify the calibration effort by using default values for some of the less critical variables; however, to minimize the loss of precision, the research team elected to collect all possible variables for this Oregon calibration project.

Table 4.1: Required Data Elements

Data Elements	Data Requirements per Facility Type																	
	Rural Two-Lane, Two-Way Roads				Rural Multilane Highways					Urban and Suburban Arterials								
	R2	R3ST	R4ST	R4SG	MRU	MRD	MR3ST	MR4ST	MR4SG	2U	3T	4D	4U	5T	U3ST	U4ST	U3SG	U4SG
AADT of Major Road	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
AADT of Minor Road		•	•	•			•	•	•						•	•	•	•
Segment Length	•				•	•				•	•	•	•	•				
Lane Width	•				•	•												
Shoulder Width	•				•	•												
Shoulder Type	•				•													
Horizontal Curve Data	•																	
Vertical Grades	•																	
Driveway Density	•									•	•	•	•	•				
Centerline Rumble Strips	•																	
Passing Lanes	•																	
TWLTLs	•																	
Roadside Hazard Rating	•																	
Side Slope					•													
Roadside Fixed Object Density										•	•	•	•	•				
Average Offset to Fixed Objects										•	•	•	•	•				
Median Type and Width						•					•	•		•				
Lighting	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•
Speed Category										•	•	•	•	•				
Automated Speed Enforcement	•				•	•				•	•	•	•	•			•	•
Intersection Skew Angle		•	•				•	•										
Left-Turn Signal Phasing																	•	•
Right-Turn Signal Phasing																	•	•
Intersection Left-Turn Lane		•	•	•			•	•						•	•	•	•	•
Intersection Right-Turn Lane		•	•	•			•	•						•	•	•	•	•
Right-turn-on-red Prohibited																•	•	•
On-Street Parking Type										•	•	•	•	•				
Maximum lanes for pedestrian crossing																	•	•
Pedestrian Volumes																	•	•
Bus stops within 1000 ft														•	•	•	•	•
Schools within 1000 ft														•	•	•	•	•
Alcohol sales establishments within 1000 ft														•	•	•	•	•

4.2.2 Data Collection Process – Rural

As shown in Table 4.1, many of the data elements are readily available in current ODOT databases. Lane width, shoulder width, shoulder type, passing lane information, and median

width are located in the ODOT State Highway Lane Report (shown as Table 3.2 in Section 3.2). Horizontal curve data including curve length, curve radius, the presence of spiral transition curve, and superelevation are included in the ODOT State Highway Horizontal Curve Report (an example of which is shown in Table 4.2). For the rural two-lane road segments, a previous research effort included confirmation of the horizontal curve information by using a combination of aerial photography and field visits, so this information confirmed or corrected that acquired from the ODOT database.

Table 4.2: Example of Horizontal Curve Report

Roadway	Overlap Mileage	Beginning Mile Point	Contract ID	Location Seq #	Super-Elevation Rate	Spirals				
	Dir	Central Angle (degrees)	Curve Length (ft)	Tangent Length (ft)		Length (ft)	Angle (degrees)	Tangent (ft)	Increase Rate	
<i>Highway #: 026 MT. HOOD Hwy</i>										
1		80.48	26	180	0	Spiral In	0	0	0	0
0		0	0	0		Spiral Out	0	0	0	0
1		80.32	26	180	0	Spiral In	300	9	0	2
6	L	17.7958	296.6	148.84		Spiral Out	300	9	0	2
1		80.23	26	180	0	Spiral In	0	0	0	0
0		0	0	0		Spiral Out	0	0	0	0

As shown in Table 4.2, there is a horizontal curve present for the segment of ODOT Highway 26 (US-26) that extends from MP 80.32 to MP 80.48. The curve length is 0.16 miles which is equivalent to the distance between MP 80.32 and MP 80.48. The degree curvature is 6 degrees. Using the Equation 4-1, the associated curve radius can be calculated to be 955 ft.

$$\text{Radius} = \frac{5729.58}{\text{Degree of Curvature}} \quad (4-1)$$

The curve does not include any superelevation and each end of the horizontal curve transitions to the tangent via a 300 ft long spiral curve.

One key variable that is required for all segments and intersections is the AADT. For most state highways, this information is available in either a measured or estimated format. The AADT information for state highways is located in the ODOT Traffic Volumes and Vehicle Classification Report. For intersections, the AADT_{major} as well as the AADT_{minor} values are needed for the SPFs. Generally, the major roads for most intersection locations were the associated state highways; however, in some instances the traffic volume for local roads

exceeded that observed for state highways. For these locations, the major road was then identified as the local road. The AADT_{minor} information was only available in ODOT databases at locations where both the major and minor roads were state highways. For the rural intersection, the project team acquired much of the AADT_{minor} information from the local county public works departments.

At some rural locations, the local jurisdiction did not have available traffic volume information. At these locations, the project team developed an estimation procedure for the AADT values. This procedure is described in Section 5.3.

Vertical grades are required input variables for the rural two-lane road SPFs. This information can be obtained from the ODOT State Highway Vertical Grade Report. Table 4.3 depicts an example of the vertical grade information for ODOT Highway 26 from MP 80.40 to MP 90.21. As an example, the vertical grade from MP 80.4 to MP 82.91 is approximately 1.03 percent.

Table 4.3: Example Vertical Grade Report

Beginning Milepoint	Location Seq #	Percent Grade	Sag/Crest	Curve Length (ft)	Contract ID	Estimated Data
<i>Highway #: 026 MT. HOOD Hwy</i>						
90.21	100	2.57	S	500	11,400	N
89.90	100	1.51	C	500	11,400	N
89.68	100	2.13	S	200	11,400	N
89.45	100	2.39	S	1200	11,400	N
89.22	100	-2.28	C	200	11,400	N
88.92	100	-2	C	500	11,400	N
88.67	100	-1.1	S	500	11,400	N
88.35	100	-3.12	C	600	11,400	N
84.97	180	-1.86	C	800	26	N
84.69	180	-0.27	S	400	26	N
84.42	180	-1.85	S	200	26	N
84.04	180	-2.77	S	200	26	N
83.94	180	-4.43	C	400	26	N
83.81	180	-1.51	S	400	26	N
83.27	180	-3.58	C	500	26	N
82.91	180	-2.45	C	800	26	N
80.40	180	1.03	S	1000	26	N

The project team was not able to identify a reliable database that includes information regarding driveway density, the presence of centerline rumble strips, the presence of two-way left-turn lanes (though the known presence of a lane is available from the ODOT lane report), the roadside hazard rating, the side slope, and the lighting of roadways. Therefore, the project team used the ODOT Digital Video Log to identify this missing data and, in the case of the roadside hazard rating and the side slope, make a subjective judgment about the value of the missing data element. Figure 4.1 shows example images from the video log.



Figure 4.1: ODOT Digital Video Log Screenshots

The project team used aerial photos to acquire data such as intersection lighting, intersection skew angle, intersection left-turn lane, and intersection right turn-lane. When the calculated skew angle measured less than 10 degrees, the research team assumed a skew angle value of zero. Figure 4.2 depicts an example of an aerial intersection view as obtained from Google Earth. At the intersection shown, it is clear that there are four left-turn lanes (one for each approach) as well as two right-turn lanes (major approaches only). The skew angle is smaller than 10 degrees (about 8 degrees) and so was assumed to have an approximate value of zero degrees.

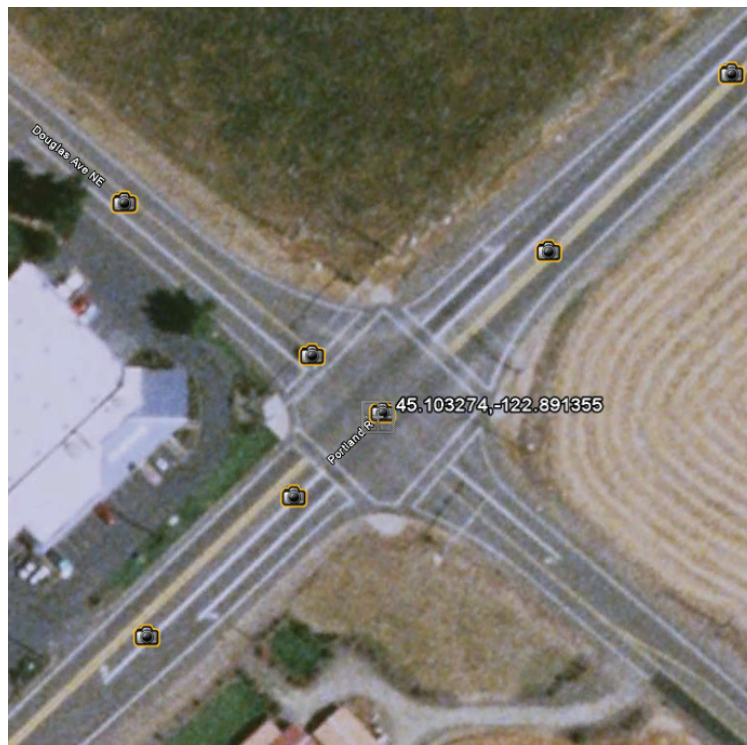


Figure 4.2 Google Earth View of Sample Rural Intersection

4.2.3 Data Collection Process – Urban

Table 4.1 identifies the required elements for the urban and suburban arterial segments and intersections. Many of the data elements are readily available in current ODOT databases.

For urban segments, the number and type of driveway is needed for CMF calculations. The research team developed a data collection process where each driveway would be annotated in Google Earth in a data file. As the researcher placed the “pin”, each driveway was classified as either minor commercial, major commercial (>50 spaces), minor residential, major residential, minor industrial or institutional, major industrial or institutional, or other typically an empty or undeveloped lot. The distinction between driveway types was often difficult so the team used a combination of the digital video log (DVL) and Google Earth resources. The analysts used clues such as business signs, mailboxes, and curb-side trash cans to distinguish between residential and commercial driveways. As recommended in the HSM, the number of parking spaces available helps designate the primary distinction between minor and major uses. Some land uses could not be classified by parking spaces such as car dealership driveways, which even though total parking spaces may be greater than 50, were classified as minor commercial based on their expected activity.

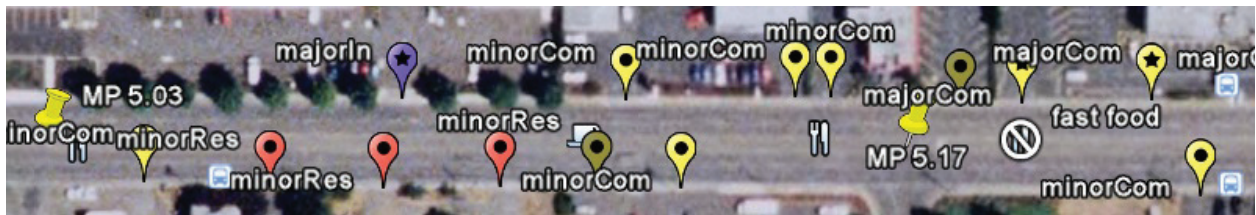


Figure 4.3: Google Data File Markup of Driveways on Urban Corridor

The research team counted roadside objects using the DVL to identify them, and Google Earth to estimate distance from the side of the rightmost lane. The research team counted roadside objects within 30 feet of the roadway; objects within 70 feet of each other only count once. If a roadside feature was identified as continuous, the team then divided the segment length by 70 feet. No minimum object height is specified in the HSM, so objects over one foot tall were included. Steep roadside backslopes were assumed to be continuous roadside objects.

The team acquired the posted speed information from the ODOT Integrated Transportation Information System (ITIS) - speed category (above or below 30 mph).

Urban intersections required a significant amount of data elements that are not available in any database. Intersection geometry (number of approaches with left-turn lanes, number of approaches with right-turn lanes, maximum number of lanes for pedestrian crossings, intersection median type and width) can be easily obtained from aerial photography. The team also determined the presence of parking and lighting using the DVL and Google Earth. Members of the research team measured length of parking using the Google distance measurement tool.

Oregon does not maintain a comprehensive statewide database of signal timing so identification of the type of left-turn phasing is not a straightforward process. The HSM requires identifying permissive, protected/permissive or permissive/protected, or protected phasing on all approaches. For the major approaches, the research team used the DVL photo log to determine the configuration of the signal heads and accompanying signs or markings to determine the most likely signal phasing. If there is a left-turn section head, 4 or more section heads were assumed to be protected/permissive signal phasing (including a “doghouse” arrangement). For 3-section heads, if there was no “left-turn yield on green” sign, protected phasing was assumed. If the “left-turn yield on green” was visible, protected/permissive phasing was assumed. These assumptions do not cover all possible arrangements (e.g. flashing yellow arrow configurations).

Signal phasing information on the minor approaches for Oregon highways is also not readily available. Since the DVL does not allow the minor approach signal configuration to be viewed and Google Streetview was not available for all locations, the research team made an assumption that if the major street had protected or permissive phasing and the minor street had dedicated left-turn lanes, the same signal phasing existed on the minor approach. The CMF for left turn phasing is applied by intersection approach and the CMFs are multiplicative. Thus, at a 4-leg signalized intersection where it was determined the major approaches have protected phasing and the minor approaches have left-turn lanes, these assumptions would result in a calculated CMF value of 0.78 (0.94^4). If the minor approach phasing was actually protected/permissive instead of the assumed protected phasing the CMF should be 0.86. If there were left-turn lanes but no dedicated phasing, the CMF should be 0.88. Most intersections with left-turn lanes in an urban area are likely to have some type of phasing, so the error introduced by this assumption ranges from 0 to 0.08 for the CMF.

The HSM also requires the number of residential driveways within 250 feet of the intersection, number of bus stops within 1000 feet, number of schools within 1000 feet, and number of alcohol sales establishments within 1000 ft. These variables were collected from Google Earth by drawing a 250 and 1000 diameter circle around the intersection center. Driveways were classified and counted as before within the buffer. For the major transit cities in Oregon, Google Earth provided an easy way to count the number of bus stops within 1000 feet by turning on the transit layer. Schools were also tallied using data provided in Google Earth. The number of alcohol sales establishments within 1000 feet of the intersection was more subjective. Using layers in Google Earth for bars and clubs, dining, grocery stores (which can sell alcohol in Oregon), and gas stations (which often sell beer in quick shops), the team determined the number of establishments selling alcohol. Another data collection approach considered by the research team was the use of Oregon Liquor Control Commission alcohol license data. In previous work (*Monsere and Chi 2008*), these data were geocoded for Multnomah County but required significant manual processing. The Google data is potential biased in that it may not report all establishments (since placement on the map is influenced by advertising). A sample intersection with these buffers is shown in Figure 4.4.

There is no available database that contains right-turn-on-red restrictions. The project team acquired this information from the ODOT DVL or Google Streetview where a “Right turn on red not permitted” or “No right turn on red” sign was posted. These signs are not always visible. Like the left-turn phasing this element was only collected for the major approach. Until recently,

Oregon statutes permitted automated red-light cameras at a fixed number of locations in specific cities, though this has changed to be more permissive. However, there are still few intersections with this technology statewide. The research team obtained the most recent list of intersections with automated enforcement to cross reference during the data collection. No intersection used in the calibration data set had automated enforcement present.

One key variable that is required for all segments and intersections is the AADT. For most state highways, this information is available in either a measured or estimated format. The AADT information for state highways is located in the ODOT Traffic Volumes and Vehicle Classification Report. For intersections, the $AADT_{major}$ as well as the $AADT_{minor}$ values are needed for the SPFs. Generally, the major roads for most intersection locations were the associated state highways. The $AADT_{minor}$ information was only available in ODOT databases at locations where both the major and minor roads were state highways. A supplemental GIS data base was obtained that collected AADT estimates on many functionally classified roads in the state. These data were used to identify minor road $AADT_{minor}$ in the urban setting. At most locations, $AADT_{minor}$ volumes were not available for all years. In these cases, the team estimated the unknown years by the multiplying the $AADT_{major}$ (which is known for each year) by the ratio of $(AADT_{major} / AADT_{minor})$ for the year where the minor AADT is known.

No database could be identified that included pedestrian volumes counts at urban intersections. This data element is unlikely to be present for many jurisdictions. One option would be to estimate models based on surrounding land-use characteristics or other explanatory variables (similar rural minor AADTs) or to use methodologies developed for pedestrian volume estimation. The research team explored the sensitivity of the various HSM defaults in the pedestrian predictive and assumed a “medium” level of pedestrian activity for all intersections.

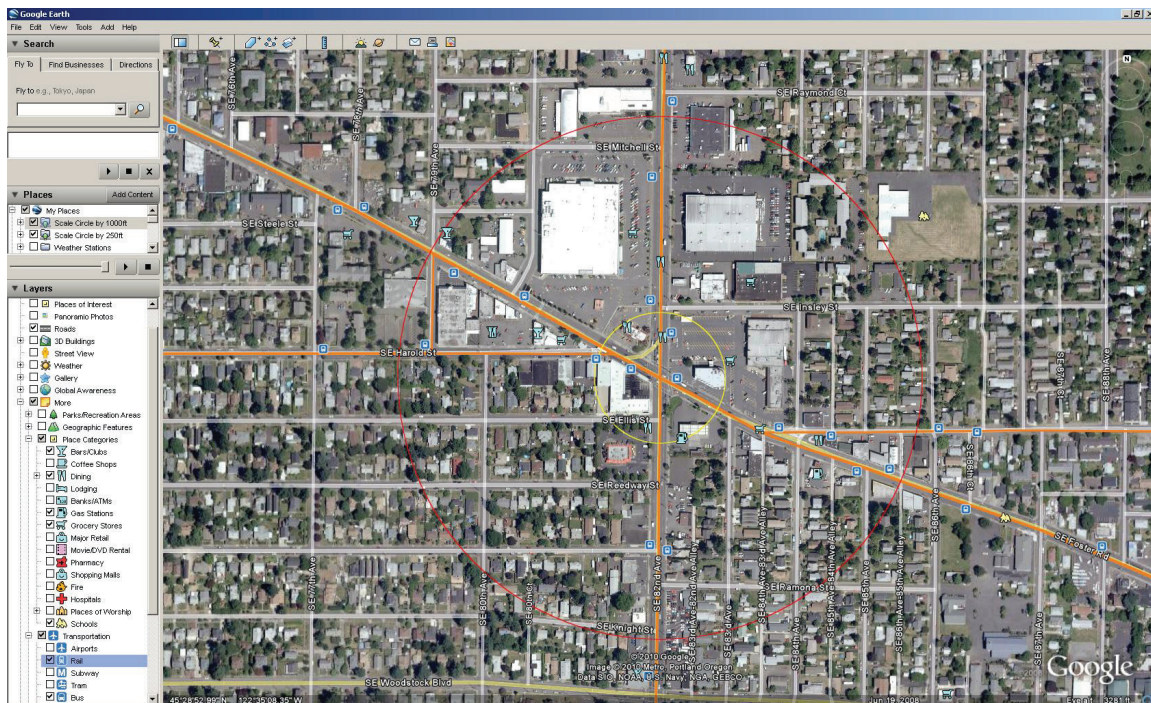


Figure 4.4: Google Earth Sample Urban Intersection with Buffers of 250 and 1000 feet

4.3 DATA COLLECTION SUMMARY

Table 4.4: Dprovides a summary of the various data resources used to identify the elements required for Oregon calibration of the HSM SPFs. As summarized in this section of the report, the project team used a wide variety of resources to identify critical site elements needed for successful and comprehensive calibration of the HSM SPFs to Oregon conditions. In general, the data collection effort included the collection and analysis of historic crash data (years 2004 to 2006) as well as a wide variety of road characteristic information. Many of the required elements were readily available in regional databases; however, some elements required additional data collection. Since the HSM procedures ultimately will be used for a wide variety of locations it would be useful to consider identifying the key elements needed for comprehensive analysis and ultimately include these data elements in an Oregon database. In particular, the $AADT_{\text{minor}}$ variable is a key input into the intersection SPFs and so this variable should be widely collected or efforts made to develop accurate estimation procedures for locations where this information is not available. Data on pedestrian volumes was also not available. The procedures estimated a default “medium” level of activity.

Table 4.4: Data Elements and Available Resources

Data Elements	Resources
AADT of Major Road	ODOT Traffic Volumes and Vehicle Classification Report and County Public Works Departments
AADT of Minor Road	ODOT Traffic Volumes and Vehicle Classification Report, Local County Public Works Departments, and AADT Estimate Model
Segment Length	Defined as part of the site selection process
Lane Width	ODOT State Highway Lane Report
Shoulder Width	ODOT State Highway Lane Report
Shoulder Type	ODOT State Highway Lane Report
Horizontal Curve Data	ODOT State Highway Horizontal Curve Report and Field Verification
Vertical Grades	ODOT State Highway Vertical Grade Report
Driveway Density	ODOT Digital Video Log
Centerline Rumble Strips	ODOT Digital Video Log
Passing Lanes	ODOT State Highway Lane Report and Aerial Photography
TWLTs	ODOT Digital Video Log and Aerial Photography
Roadside Hazard Rating	ODOT Digital Video Log
Side Slope	ODOT Digital Video Log
Roadside Fixed Object Density	ODOT Digital Video Log
Average Offset to Fixed Objects	ODOT Digital Video Log and Aerial Photography
Median Type and Width	ODOT State Highway Lane Report
Lighting	ODOT Digital Video Log (Roadways), Aerial Photography (Intersections)
Speed Category	ODOT State Highway Lane Report
Automated Speed Enforcement	ODOT TransGIS
Intersection Skew Angle	Aerial Photography
Left-Turn Signal Phasing	ODOT Digital Video Log, Google Streetview (major legs)
Right-Turn Signal Phasing	ODOT Digital Video Log, Google Streetview (major legs)
Intersection Left-Turn Lane	Aerial Photography
Intersection Right-Turn Lane	Aerial Photography
Right-turn-on-red Prohibited	ODOT Digital Video Log, Google Streetview (major legs)
On-Street Parking Type	Aerial Photography
Maximum lanes for pedestrian crossing	Aerial Photography
Pedestrian Volumes	*Default assumed –“Medium”
Bus stops within 1000 ft	Aerial Photography
Schools within 1000 ft	Aerial Photography
Alcohol sales establishments within 1000 ft	Aerial Photography

5.0 DATA ANALYSIS

Upon successful completion of site selection and data collection, the research team initiated the analysis effort to develop the Oregon calibration values that adapt the HSM SPFs to local conditions. Prior to directly applying the calibration process outlined in the HSM (Volume 2, Part B Appendix), the non-intersection sites must be further divided into homogeneous segments, crashes must be assigned to the associated study segments and intersections, and missing data variables must be identified and estimated. Following these three key analysis steps, the calibration procedure can then be applied to the various facility types. This chapter reviews this process as it applied to the Oregon effort.

5.1 DIVIDING ROADWAY SITES INTO HOMOGENEOUS SEGMENTS

Before calculating the predicted crash frequency of roadway segment sites, each roadway segment site should be divided into similar (homogenous) roadway segments (AASHTO 2010). These homogeneous segments should contain consistent features as represented by the physical geometry requirements for the specific facility type. The HSM also recommends that, for practical application purposes, the minimum segment length should be approximately 0.1 miles. The HSM further includes recommendations for rounding the physical site characteristics. For example, lane widths of 11.8 ft and 12.1 ft would both be rounded to 12.0 ft prior to segmentation so that the physical differences used for segmentation clearly indicate a definitive change in the road environment.

For rural segments, the research team determined that one alternative method for compiling homogeneous segments was to take the wide range of segments already available in the ODOT databases (often much smaller than 0.1 miles in length with many as small as 0.01 miles) and then combine them into homogeneous segments at least 0.1 miles long. When characteristics dramatically varied within a combined segment, the project team used a weighted CMF for the particular feature; however, the project team tried to avoid this approach unless the associated roadway elements differed dramatically.

In the urban areas, segmentation is required at each intersection (in addition to changes in lane widths, number of lanes, median type or width, posted speed limit, or speed category). In many of the urban environments, this resulted in sections that were less than 0.1 mile in length. A histogram of average segment length is shown in Figure 5.1. The average segment length is 395.9 ft (0.07 miles).

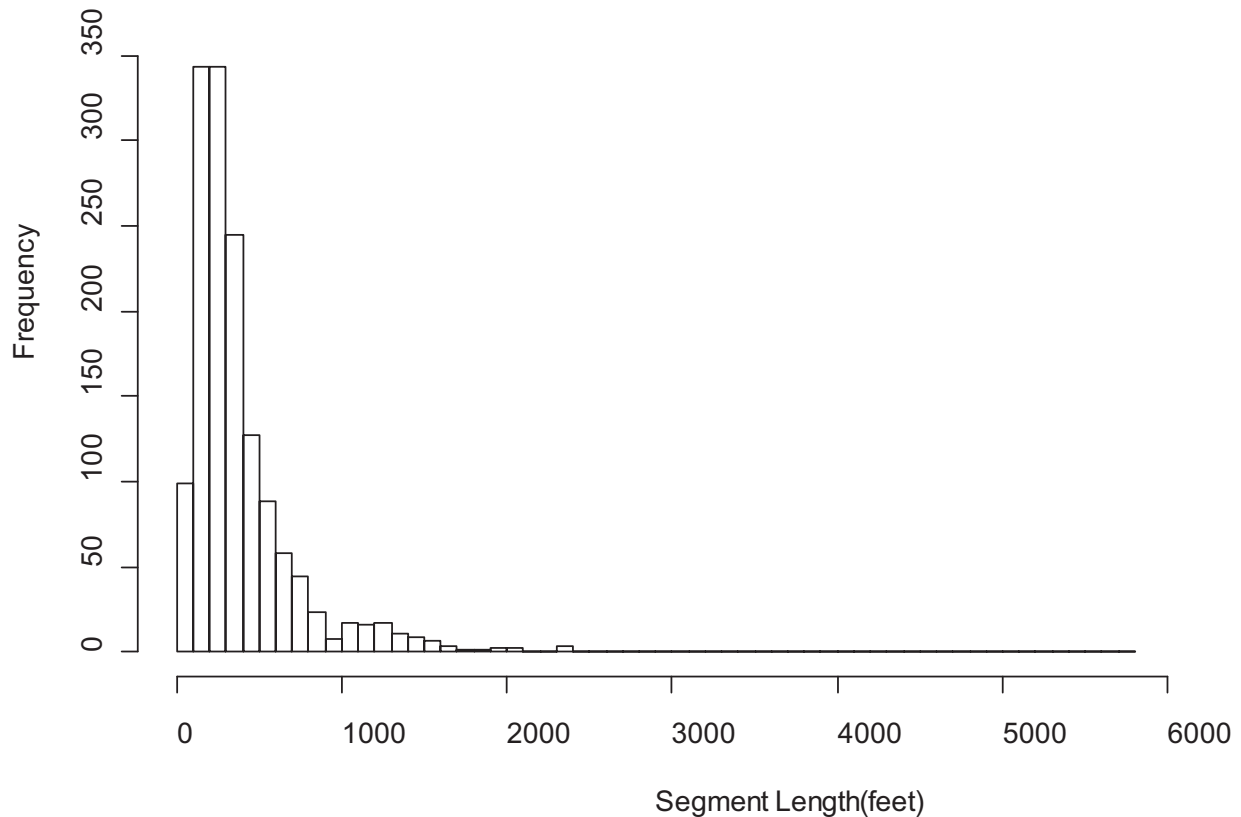


Figure 5.1: Histogram of Urban Arterial Segment Length

Upon completion of the roadway site segmentation effort, the project team then used these newly defined segment boundaries for crash assignment. The next section reviews the crash assignment effort for both the segments and the study intersections.

5.2 CRASH ASSIGNMENT

The HSM SPFs are divided into segment and intersection predictive methods; therefore, it is important to carefully assign crashes to these two categories. In the vicinity of intersections there may be crashes that geographically occur on the segment but that are a direct result of intersection conditions and so it is important to clearly distinguish between intersection-related and segment crashes. The project team next assigned crashes to the segments and intersections using a systematic procedure. The methods use by the project team for assigning crashes to roadway segments and intersection sites are presented in Section 5.2.1 (segments) and Section 5.2.2 (intersections).

5.2.1 Assigning Crashes to Roadway Segments

As an initial step, the project team identified all crashes for the 2004 to 2006 study period that occurred within the limits of the individual study segments. The crashes were next evaluated to determine if they met the HSM roadway-related criteria. The steps for this evaluation process are shown as follows:

1. If the crash data indicated that the crash occurred within the limits of an intersection, the crash was not assigned to the segment.
2. If the crash reporting indicated that the crash was considered intersection-related, the crash was not assigned to the segment.
3. If the crash was shown as driveway-related, the crash was assigned to the segment.
4. For the higher speed rural locations, if the crash was a rear-end crash and the crash occurred at the approach to an intersection, the crash was not assigned to the segment.
5. All other crashes were assigned to the segment.

Following crash assignment, the project team tallied the annual number of crashes at each segment location and this value represented the total observed crashes for a particular roadway type for a given year.

5.2.2 Assigning Crashes to Intersection Sites

For each intersection type, the research team identified all reported crashes that occurred during the study period (2004 to 2006) within the physical intersection limits as well as those that occurred on the intersection approaches (approximately 250 ft from the center of each intersection). Next, team members analyzed each crash in the vicinity of an intersection to determine if that crash may also have been associated with intersection operations. The steps for this evaluation process are shown as follows:

1. If the crash data indicated that the crash happened within the limits of an intersection, the crash was assigned to that intersection.
2. If the crash reporting indicated that the crash was considered intersection-related, the crash was assigned to that intersection.
3. If the crash was shown as driveway-related, the crash was not assigned to the intersection.
4. For the higher speed rural locations, if the crash was a rear-end crash and the crash occurred at the approach to an intersection, the crash was assigned to that intersection.
5. All other crashes were not assigned to the intersection.

Following crash assignment, the project team tallied the annual number of crashes at each intersection location and this value represented the total observed crashes for a particular intersection type for a given year.

5.3 MINOR AADT ESTIMATION MODEL-RURAL

Often a data collection effort will result in the identification of data elements that are incomplete or unavailable. For the calibration effort, the project team was not always able to locate a value for the AADT for minor roads at rural intersections. Since the major and minor AADT value are critical input values into the intersection SPFs, the project team developed an AADT estimation model to address this gap in available data. Due to the large number of sites and the lengthy data collection procedure, it was not practical for the project team to physically collect all unknown AADT data. As a result, this section of the report reviews AADT estimation models developed by the project team that were generated from known AADT of minor roads. The project team developed the AADT estimation model using multiple linear regression techniques in a manner similarly reviewed for those developed for Indiana (see Section 2.3). The following sections, therefore, review the candidate variables, correlation between these variables, selected variables, and final AADT estimation model.

5.3.1 Response Variable and Independent Variables

The response variable (also known as the dependent variable) is the target data element for this modeling effort and, for this analysis, was the AADT of the minor road. The authors evaluated a variety of variables and identified 12 variables which appeared to contribute to an expected rural-location traffic volume. These candidate variables are listed in Table 5.1.

Table 5.1: Independent Variables for Minor AADT Estimation Models

Variable	Description
CtPop	County population
CityPop	Population of nearest city
Income	Average per capita income of the region
Distance	Distance to the nearest freeway (miles)
MIA	Is the cross street a minor arterial? (1=yes, 0=no)
MAC	Is the cross street a major collector? (1=yes, 0=no)
CityLimit	Is the intersection located within a city limit? (1=yes, 0=no)
Right	Is a right-turn lane present on the minor road? (1=yes, 0=no)
RightCross	Does the major road have a right-turn lane? (1=yes, 0=no)
LandUse	Is the adjacent land developed? (1=yes, 0=no)
Centerline	Is a centerline present on the minor road? (1=yes, 0=no)
Edgeline	Does the minor road have striped edgelines? (1=yes, 0=no)

The first four independent variables are continuous variables (values on a scale and that do not fit a yes versus no category). To minimize the unequal variance, the project team applied a log10 transformation to both the response and the independent continuous variables. This transformation helped to center the variables and reduce potential multi-collinearity issues (Mohamad et al. 1998). All of the independent continuous variables were further centered by subtracting all individual observations of the variables from the mean of all observations.

5.3.2 Correlation between Variables

When the model includes too many variables, there can be a loss in precision because the variables might be correlated to each other. One important assumption of linear regression is that all variables should be independent of each other. Therefore, the project team calculated the variance inflation factor (VIF) to test to see if there was a strong correlation between any of the candidate variables. Table 5.2 shows VIFs for all of the candidate variables. When the value of the VIF is less than ten, there is no serious correlation problem (*Rawlings et al. 1998*). Table 5.2 shows that all of the VIF values are very small, and therefore all variables could be assumed to be independent.

Table 5.2: Variance Inflation Factors for Independent Variables

Variable	VIF
CtPop	1.576
CityPop	1.311
Income	1.198
Distance	1.289
MIA	1.410
MAC	1.278
City Limit	1.282
Right	1.199
RightCross	1.267
LandUse	1.269
Centerline	1.435
Edgeline	1.663

5.3.3 Variable Selection

For the model development, the project team identified variables by selecting the best model from all possible subset models. To perform this analysis, the team first selected the best model for each number of parameters and developed an associated Cp plot for the models. The Cp plot shows the relationship between the Cp statistic of each best model and p -- Number of Parameters (the intercept and variables). Figure 5.2 shows the Cp plot. The line is the condition when Cp equals p. The Cp of a model which has no bias should be approximately equal to p (*Ramsey and Schafer 2002*). When the value of Cp is above the line, this indicates that the model is biased. When the value of Cp is below the line it can be assumed that the model does not produce bias. To avoid unnecessary independent variables, the model with the smallest number of parameters when the Cp drops below the Cp=p line should be selected. The figure indicates that the appropriate AADT estimation model, therefore, is the best model when the number of parameters equals 10. This model includes the following predictor variables: Distance, MIA, MAC, CityLimit, Right, RightCross, LandUse, Centerline and Edgeline. The Intercept is the tenth parameter in the model.

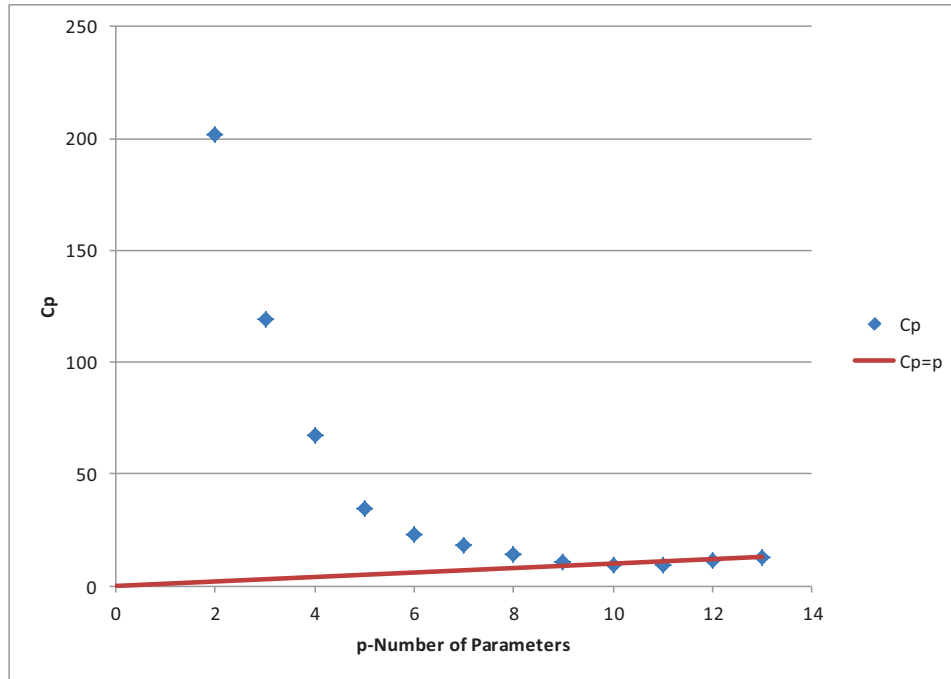


Figure 5.2: Cp Plot

5.3.4 Final AADT Estimation Model

For the calibration effort, the project team generated two final AADT estimation models. The first model is to estimate the AADT for the minor roads for all intersection types except for MR4SG. The second model is to estimate AADT of minor roads of MR4SG. The regression results for the best nine-variable (ten-parameter) models for the final two AADT estimation models is shown in Table 5.3 (see Table 5.1 for variable definitions).

Model-1 and Model-2 have the same variables and similar values for each parameter. These two models can be written in equation format as follows:

Model-1 (except for MR4SG):

$$\log_{10} \text{AADT} = 2.0281 - 0.112 \times (\log_{10} \text{Distance} - 1.174634) + 0.68(\text{MIA}) + 0.4148(\text{MAC}) + 0.1391(\text{CityLimit}) + 0.1761(\text{Right}) + 0.2060(\text{RightCross}) + 0.2125(\text{LandUse}) + 0.3028(\text{Centerline}) + 0.1268(\text{Edgeline}) \quad (5-1)$$

Model-2 (MR4SG):

(5-2)

$$\log_{10} AADT = 2.0246 - 0.1064 \times (\log_{10} \text{Distance} - 1.177515) + 0.6634(\text{MIA}) + 0.4132(\text{MAC}) + 0.1427(\text{CityLimit}) + 0.1987(\text{Right}) + 0.2073(\text{RightCross}) + 0.2229(\text{LandUse}) + 0.2988(\text{Centerline}) + 0.1381(\text{Edgeline})$$

“1.174634” in Model-1 and “1.177515” in Model-2 represent the means of the log10 transformed Distance variable.

Table 5.3: Regression for Candidate Models

Models:	Model-1 [Applies to Intersection R3ST, R4ST, R4SG, MR3ST, and MR4ST]		Model-2 [Applies to Intersection MR4SG]	
R-Square:	0.6231		0.6395	
Variable Name	Value	Pr (> t)	Value	Pr (> t)
Intercept	2.0281	0.0000	2.0246	0.0000
Distance (transformed and centered)	-0.1120	0.0136	-0.1064	0.0170
MIA	0.6810	0.0000	0.6634	0.0000
MAC	0.4148	0.0000	0.4132	0.0000
CityLimit	0.1391	0.0732	0.1427	0.0580
Right	0.1761	0.0266	0.1987	0.0093
RightCross	0.2060	0.0036	0.2073	0.0025
LandUse	0.2125	0.0001	0.2229	0.0000
Centerline	0.3028	0.0001	0.2988	0.0001
Edgeline	0.1268	0.0451	0.1381	0.0281

As a final step, the project team performed an additional inspection of the model results and noted that the R-Squared values were both greater than 0.6 and that the values for all of the parameters resulted in expected plus or minus signs (logical increases and decreases based on the variable definition). As previously reviewed, the models also did not include any variables with strong correlations.

5.4 MINOR AADT ESTIMATION - URBAN

Since it is much more likely to have counts on urban minor highways and there are many more signalized intersections to sample, the selection process included a screen for minor approaches with at least one year of reported volume. If minor volume counts were missing for any of the analysis years, the project team estimated the unknown volume by multiplying the $AADT_{major}$ (which is known for each year) by the ratio of $(AADT_{major} / AADT_{minor})$ for the year where the minor AADT is known.

5.5 DEVELOPING CALIBRATION FACTORS

Upon identification of all required data and completion of the estimation for missing data values, the research team then proceeded to develop the calibration factors. To perform this analysis, first the HSM procedures for predicted crashes must be applied. As an initial step, the predictive methods for each road type are incorporated for each segment and intersection location. This

evaluation will result in unadjusted predicted crashes. These predicted crashes are then contrasted to observed crashes to ultimately identify the calibration factors. If a jurisdiction generally experiences dramatically different driving behavior or reporting thresholds than the nationally expected values, the locally-derived crash type and severity distributions should be inspected and considered in the overall calibration effort. The following sections outline this calibration procedure.

5.5.1 Unadjusted Predicted Crashes

To calculate the unadjusted predicted crashes for each homogeneous segment or intersection, the research team first calculated the number of crashes under base condition using a base model equation or SPF included in the HSM. For example, base conditions for a rural two-lane, two-way road segment are:

- Lane widths of 12 feet,
- Paved shoulder widths of six feet,
- Roadway hazard ratings of three,
- Five driveways per mile,
- Level vertical conditions,
- No horizontal curves,
- No supplemental lanes,
- No rumble strips,
- No lighting, and
- No automated speed enforcement.

N_{spf} is then the value of the predicted total crash frequency for base conditions and can be calculated using the associated SPF equation.

To calculate the unadjusted predicted number of crashes at each location, the N_{spf} value can then be multiplied by the CMFs that represent non-base conditions at each location. Equation 5-3 demonstrates this calculation:

$$N_{predicted (unadjusted)} = N_{spf} \times (CMF_1 \times CMF_2 \dots CMF_n) \quad (5-3)$$

For a site where all conditions adhere to the base condition, the CMF value would be equal to one. Similarly, for any base conditions present that specific CMF has a value of one. For site features expected to result in a decreased number of crashes the CMF should be less than one.

For features that would likely contribute to an increase in crashes, the CMF for that feature is then greater than one. Section 5.5.2 demonstrates an example calculation for unadjusted predicted crashes.

5.5.2 Example of predicted crash calculations

A multilane rural undivided segment is depicted as Site 3 in the following example. This location is Highway 35 from mile point 15.93 to mile point 17.93. The study year shown in this example is 2005.

Table 5.4 shows site characteristic data for a portion of this corridor (mile points 16.85 to 17.11). In Table 5.4, the location of mile point 16.85 is the end of a previous homogenous roadway segment (Segment 4). A new segment (Segment 5) begins at this location. The table indicates that at milepoint 16.89, the side slope for one side of the road changes from 1:2 to 1:6. Using the strict definition of homogeneous segments, therefore, Segment 5 should end at milepoint 16.89. The HSM recommends, however, that a minimum segment length of 0.1 miles be used. Since Segment 5, if ended at this change in side slope location, would result in a segment considerably smaller than 0.1 miles the project team chose to continue Segment 5 until the segment length reaches this minimum length. Therefore, Segment 5 extends from milepoint 16.85 to 16.95 with the length of 0.1 miles, and the next homogenous segment in this site is from MP 16.95 to MP 17.11 (Segment 6). There are a total of 11 homogenous segments at Site 3. The change in physical properties within this not-quite-homogeneous segment can be resolved by either using a segment average value for the side slope or using weighted CMF values to capture this side slope differential.

Table 5.5 shows a portion of the “predicted crash” calibration spreadsheet used for this analysis. The content shown in this table is for the Site 3 MRU segments depicted in Table 5.4. The predicted number of crashes for the base condition for the Segment 5 was 0.235 and 0.376 for the Segment 6. Following the application of the CMFs for each segment, the unadjusted predicted number crashes for Segment 5 equates to 0.238 (0.387 for Segment 6). Following this site-by-site calculation for the unadjusted predicted crash frequencies, the total predicted number of crashes for this site can be determined by adding the values for each segment. For the example shown, the total predicted crash frequency for site 3 is equal to 5.416.

Table 5.4: Example Road Characteristic Data for Segments

Site #	Segment #	Hwy #	Beg MP	End MP	Length (mi)	AADT (2005)	Lane Width (ft)				Shoulder Width (ft)		Shoulder Type		Side Slope (1v:Xh)		Light	Automated Speed Enforcement
							1	2	3	4	1	2	1	2	1	2		
↓																		
3	5	35	16.85	16.86	0.01	7600	12	12	12	12	10	10	paved	paved	7	2		
3	5	35	16.86	16.87	0.01	7600	12	12	12	12	10	10	paved	paved	7	2		
3	5	35	16.87	16.88	0.01	7600	12	12	12	12	10	10	paved	paved	7	2		
3	5	35	16.88	16.89	0.01	7600	12	12	12	12	10	10	paved	paved	7	2		
3	5	35	16.89	16.90	0.01	7600	12	12	12	12	10	10	paved	paved	7	6		
3	5	35	16.90	16.91	0.01	7600	12	12	12	12	10	10	paved	paved	7	6		
3	5	35	16.91	16.92	0.01	7600	12	12	12	12	10	10	paved	paved	7	6		
3	5	35	16.92	16.93	0.01	7600	12	12	12	12	10	10	paved	paved	7	6		
3	5	35	16.93	16.94	0.01	7600	12	12	12	12	10	10	paved	paved	7	6		
3	5	35	16.94	16.95	0.01	7600	12	12	12	12	10	10	paved	paved	7	6		
					SUM Average													
					0.1	7600	(Note: Recommended minimum segment length is 0.1 miles)											
3	6	35	16.95	16.96	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	16.96	16.97	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	16.97	16.98	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	16.98	16.99	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	16.99	17.00	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.00	17.01	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.01	17.02	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.02	17.03	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.03	17.04	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.04	17.05	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.05	17.06	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.06	17.07	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.07	17.08	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.08	17.09	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.09	17.10	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
3	6	35	17.10	17.11	0.01	7600	12	12	12	12	6	6	paved	paved	7	6		
					SUM Average													
					0.16	7600												
3	↓ Note: Site 3 is from MP 15.93 to MP 17.93. There are 11 homogenous segments. This table shows examples of segment 5 and segment 6																	

Table 5.5: Example of Calculation Spreadsheet for Estimating Predicted Crashes

Site #	Segment #	Hwy #	Beg MP	End MP	Length (mi)	AADT (2005)	Nspf	CMFs					Npredict
								Lane Width	Shoulder Width and Type	Side Slope	Lighting	Automated Speed Enforcement	
	↓												↓
3	5	35	16.85	16.86	0.01	7600		1	0.96	1.09	1	1	
3	5	35	16.86	16.87	0.01	7600		1	0.96	1.09	1	1	
3	5	35	16.87	16.88	0.01	7600		1	0.96	1.09	1	1	
3	5	35	16.88	16.89	0.01	7600		1	0.96	1.09	1	1	
3	5	35	16.89	16.90	0.01	7600		1	0.96	1.03	1	1	
3	5	35	16.90	16.91	0.01	7600		1	0.96	1.03	1	1	
3	5	35	16.91	16.92	0.01	7600		1	0.96	1.03	1	1	
3	5	35	16.92	16.93	0.01	7600		1	0.96	1.03	1	1	
3	5	35	16.93	16.94	0.01	7600		1	0.96	1.03	1	1	
3	5	35	16.94	16.95	0.01	7600		1	0.96	1.03	1	1	
					SUM	Average							
					0.1	7600	0.235	1	0.96	1.054	1	1	0.238
3	6	35	16.95	16.96	0.01	7600		1	1	1.03	1	1	
3	6	35	16.96	16.97	0.01	7600		1	1	1.03	1	1	
3	6	35	16.97	16.98	0.01	7600		1	1	1.03	1	1	
3	6	35	16.98	16.99	0.01	7600		1	1	1.03	1	1	
3	6	35	16.99	17.00	0.01	7600		1	1	1.03	1	1	
3	6	35	17.00	17.01	0.01	7600		1	1	1.03	1	1	
3	6	35	17.01	17.02	0.01	7600		1	1	1.03	1	1	
3	6	35	17.02	17.03	0.01	7600		1	1	1.03	1	1	
3	6	35	17.03	17.04	0.01	7600		1	1	1.03	1	1	
3	6	35	17.04	17.05	0.01	7600		1	1	1.03	1	1	
3	6	35	17.05	17.06	0.01	7600		1	1	1.03	1	1	
3	6	35	17.06	17.07	0.01	7600		1	1	1.03	1	1	
3	6	35	17.07	17.08	0.01	7600		1	1	1.03	1	1	
3	6	35	17.08	17.09	0.01	7600		1	1	1.03	1	1	
3	6	35	17.09	17.10	0.01	7600		1	1	1.03	1	1	
3	6	35	17.10	17.11	0.01	7600		1	1	1.03	1	1	
					SUM	Average							
					0.16	7600	0.376	1	1	1.03	1	1	0.387
3	↓												↓
SUM:												5.416	

5.5.3 Calculation of Calibration Factors

Following the calculation of the unadjusted predicted crashes and identification of the total observed crashes for each study site, the calibration factor can then be determined. The HSM provides the following equation for calculation of the calibration factor:

$$C = \frac{\sum_{\text{allsites}} N_{\text{observed}}}{\sum_{\text{allsites}} N_{\text{predicted (unadjusted)}}} \quad (5-4)$$

Where: N_{observed} = observed crash frequency of each site,
 $N_{\text{predicted (unadjusted)}}$ = unadjusted predicted crash frequency of each site, and
 C = calibration factor.

Based on the example shown in Section 5.5.2, the total predicted crash frequency for site 3 was 5.416 for the year 2005. During the same year, this site experienced a total of 5 crashes (observed). Therefore the calculated calibration factor for this site for the year 2005 is shown as follows:

$$C_{\text{Site 3 (2005)}} = \frac{5}{5.416} = 0.92 \quad (5-5)$$

This basic calibration procedure should be applied to all study road and intersection types. Note that the example evaluated a single year; however, due to known regression-to-the-mean tendencies in crash data, the calibration factor should be developed for at least a three year period. For the example shown, then, the calibration factor could be calculated in two ways. First, the value for each year could be calculated and then the three values averaged. A second approach is that the crashes (predicted and observed) for three years should be added and then a single calibration value calculated. The project team evaluated both approaches for this research effort and determined that they gave similar results.

5.5.4 Locally-Derived Values

Table 5.6 lists the 24 HSM tables or factors that can be calibrated to local conditions based on proportions. The HSM uses default crash and severity types for select CMF and crash type estimates. The basis for the HSM default distribution values is the states used in the development of the SPFs. For example, for the rural two-lane, two-way roads the default distribution for severity and for collision type at segment locations evolved from State of Washington data for the years 2002 to 2006. Similarly, default values for intersection distributions were developed from California data for the years 2002 to 2006. A similar default distribution is included for the proportion of nighttime crashes (for use with the street lighting CMFs). It is possible, therefore, that the inclusion of these default values in the development of the predicted (unadjusted) crashes may introduce a bias that does not apply to the State of

Oregon. Since this information is then used for calculating calibration factors, the project team felt that the use of default values versus locally-derived values merited consideration in this analysis.

Development of the local-derived proportions was performed using the full statewide crash data base whenever possible. Some proportions had to be developed using the calibration data base rather than the full database. For example, in order to determine p_{nr} (proportion of total crashes for unlighted roadway segments that occur at night) for use in the segment lighting CMF, whether a segment is lighted or unlighted must be known. Lighting is not kept in the state inventory file, so it was necessary for the research team to estimate the values based on the calibration segments where the presence of lighting was collected.

Table 5.6: HSM Tables or Equations for Which Local Calibration is Possible

Chapter	Table or Type of Roadway Element in the HSM	Source	Segments	Intersections	Local Calibration Value	
10- Rural Two-Lane Highways	Table 10-3	1	X		Crash severity by facility type for roadway segments	
	Table 10-4	1	X		Collision type by facility type for roadway segments	
	Table 10-5	1		X	Crash severity by facility type for intersections	
	Table 10-6	1		X	Collision type by facility type for intersections	
	Eq 10-18	1	X		Driveway-related accidents as a proportion of total accidents (p_d)	
	Table 10-12	2	X		Nighttime accidents as a proportion of total accidents by severity level	
	Table 10-15	2		X	Nighttime accidents as a proportion of total accidents by severity level and by intersection type	
11 - Rural multilane highways	Table 11-4	1	X		Crash severity and collision type for undivided segments	
	Table 11-6	1	X		Crash severity and collision type for divided segments	
	Table 11-9	1		X	Crash severity and collision type by intersection type	
		Table 11-15	2	X		Nighttime accidents as a proportion of total accidents by severity level and by roadway segment type for undivided roadway segments
		Table 11-19	2		X	Nighttime accidents as a proportion of total accidents by severity level and by roadway segment type for divided roadway segments
		Table 11-24	2		X	Nighttime accidents as a proportion of total accidents by severity level and by intersection type
12 - Urban and Suburban Arterials	Table 12-4	1	X		Crash severity and collision type for multiple-vehicle non-driveway collisions by roadway segment type	
	Table 12-10	1	X		Crash severity and collision type for single-vehicle accidents by roadway segment type	
	Table 12-6	1	X		Crash severity for driveway-related collisions by roadway segment type	
	Table 12-7	1	X		Pedestrian accident adjustment factor by roadway segment type	
	Table 12-8	1	X		Bicycle accident adjustment factor by roadway segment type	
	Table 12-9	1	X		Proportion of fixed object collisions (not listed as option in HSM and not included in the Oregon calibration effort)	
	Table 12-11	1		X	Crash severity and collision type for multiple-vehicle collisions by intersection type	
	Eq 12-27	1		X	Proportion of fatal and injury single-vehicle accidents at 3 ST and 4 ST	
	Table 12-13	1		X	Crash severity and collision type for single-vehicle accidents by intersection type	
	Table 12-16	1		X	Pedestrian accident adjustment factor by intersection type for STOP-controlled intersections	
	Table 12-17	1	X		Bicycle accident adjustment factor by intersection type	
	Table 12-23	2	X		Nighttime accidents as a proportion of total accidents by severity level and by roadway segment type	
	Table 12-27	2		X	Nighttime crashes as a proportion of total crashes by severity level and by intersection type	

Source: (1) 2004-06 Statewide Databases (Crash and ITIS), (2) Segments Collected for Calibration

As part of the calibration effort, therefore, the project team developed two types of locally-derived values. The first type represents locally-derived values for each crash study year. The second type then incorporated the average locally-derived values as derived from crash data for all three study years (2004 to 2006). Table 5.7 through Table 5.13 each show the comparisons between default proportion and Oregon-derived values based on the three-year crash data for the rural two-lane two-way roadway segments and urban suburban facilities. Oregon-derived values for all facilities are included in Appendix B.

Table 5.7: HSM-Default Crash Severity Levels versus Oregon Levels (2004-2006) for Rural Two-Lane, Two-Way Roads

Crash Severity Level	Percentage of total roadway segment crashes	
	HSM-Provided Values	Oregon-Derived Values
Fatal	1.3	3.1
Incapacitating Injury	5.4	7.7
Non-incapacitating Injury	10.9	25.1
Possible Injury	14.5	18.0
Total Fatal Plus Injury	32.1	54.0
Property Damage Only	67.9	46.0
TOTAL	100.0	100.0

Table 5.8: HSM-Default Collision Distributions versus Oregon Distributions (2004 -2006) for Rural Two-Lane, Two-Way Roads

Collision Type	Percentage of total roadway segment crashes by crash severity level					
	HSM-Provided Values			Oregon-Derived Values		
	Total fatal and injury	Property damage only	TOTAL (all severity levels combined)	Total fatal and injury	Property damage only	TOTAL (all severity levels combined)
SINGLE-VEHICLE CRASHES						
Collision with animal	3.8	18.4	12.1	3.1	12.0	7.2
Collision with bicycle	0.4	0.1	0.2	0.6	0.0	0.3
Collision with pedestrian	0.7	0.1	0.3	0.8	0.0	0.4
Overtaken	3.7	1.5	2.5	8.6	3.8	6.4
Run-off-road	54.5	50.5	52.1	47.1	39.1	43.5
Other single-vehicle crash	0.7	2.9	2.1	1.7	1.3	1.5
Total single-vehicle crashes	63.8	73.5	69.3	62.0	56.2	59.3
MULTIPLE-VEHICLE CRASHES						
Angle collision	10	7.2	8.5	0.8	0.7	0.8
Head-on collision	3.4	0.3	1.6	5.8	1.0	3.6
Rear-end collision	16.4	12.2	14.2	18.8	21.4	20.0
Sideswipe collision	3.8	3.8	3.7	4.4	7.1	5.6
Other multiple-vehicle collision	2.6	3.0	2.7	8.2	13.5	10.6
Total multiple-vehicle crashes	36.2	26.5	30.7	38.0	43.8	40.7
TOTAL CRASHES	100.0	100.0	100.0	100.0	100.0	100.0

Table 5.9: HSM-Default Nighttime Proportions versus Oregon Proportions (2004 - 2006) for Rural Two-Lane, Two-Way Roads

HSM Default Values			
Roadway Type (2U)	Proportion of total nighttime crashes by severity level		Proportion of crashes that occur at night
	Fatal and Injury p_{inr}	PDO p_{pnr}	p_{nr}
	0.382	0.618	0.37
	Oregon-Derived Values		
	Proportion of total nighttime crashes by severity level		Proportion of crashes that occur at night
	Fatal and Injury p_{inr}	PDO p_{pnr}	p_{nr}
	0.54	0.46	0.28

Table 5.10: Nighttime Crash Proportions for Unlighted Urban Roadway Segments (2004 -2006)

HSM Default Values			
Road Type	Proportion of total nighttime crashes by severity level		Proportion of crashes that occur at night
	Fatal and Injury p_{inr}	PDO p_{pnr}	p_{nr}
2U	0.424	0.576	0.316
3T	0.429	0.571	0.304
4U	0.517	0.483	0.365
4D	0.364	0.636	0.410
5T	0.432	0.568	0.274
Oregon-Derived Values			
2U	0.606	0.394	0.215
3T	0.286	0.714	0.118
4U	0.385	0.615	0.234
4D	0.800	0.2	0.225
5T	0.474	0.526	0.228

Table 5.11: Distribution of Multiple-Vehicle Nondriveway Collisions for Roadway Segments by Manner of Collision Type (2004 -2006)

Collision type	HSM Default Values									
	2U		3T		4U		4D		5T	
	FI	PDO	FI	PDO	FI	PDO	FI	PDO	FI	PDO
Rear-end collision	0.730	0.778	0.845	0.842	0.511	0.506	0.832	0.662	0.846	0.651
Head-on collision	0.068	0.004	0.034	0.020	0.077	0.004	0.020	0.007	0.021	0.004
Angle collision	0.085	0.079	0.069	0.020	0.181	0.130	0.040	0.036	0.050	0.059
Sideswipe, same direction	0.015	0.031	0.001	0.078	0.093	0.249	0.050	0.223	0.061	0.248
Sideswipe, opposite direction	0.073	0.055	0.017	0.020	0.082	0.031	0.010	0.001	0.004	0.009
Other multiple-vehicle collision	0.029	0.053	0.034	0.020	0.056	0.080	0.048	0.071	0.018	0.029
Collision type	Locally-Derived Values									
	2U		3T		4U		4D		5T	
	FI	PDO	FI	PDO	FI	PDO	FI	PDO	FI	PDO
Rear-end collision	0.709	0.680	0.818	0.636	0.658	0.548	0.783	0.646	0.606	0.524
Head-on collision	0.029	0.009	0.016	0.004	0.029	0.004	0.006	0.000	0.018	0.011
Angle collision	0.013	0.049	0.000	0.025	0.015	0.016	0.019	0.008	0.020	0.015
Sideswipe, same direction	0.010	0.037	0.000	0.075	0.060	0.205	0.038	0.142	0.053	0.156
Sideswipe, opposite direction	0.039	0.020	0.000	0.014	0.022	0.008	0.013	0.004	0.005	0.004
Other multiple-vehicle collision	0.201	0.206	0.166	0.246	0.216	0.219	0.140	0.200	0.298	0.289

Table 5.12: Proportion of Pedestrian Accidents by Roadway Segment Type (2004-2006)

Road type	Pedestrian Crash Adjustment Factor (f_{pedr})			
	HSM-Default Values		Locally-Derived Values	
	Posted Speed 30 mph or Lower	Posted Speed Greater than 30 mph	Posted Speed 30 mph or Lower	Posted Speed Greater than 30 mph
2U	0.036	0.005	0.034	0.012
3T	0.041	0.013	0.020	0.014
4U	0.022	0.009	0.016	0.004
4D	0.067	0.019	0.048	0.013
5T	0.030	0.023	0.010	0.021

Table 5.13: Local Proportions of Crashes by Intersection Type (2004-2006)

Intersection Type	HSM-Default Values	Locally-Derived Values
	Proportion of Single Vehicle Crashes that are Fatal and Injury (f_{bisv})	
3ST	0.310	0.900
4ST	0.280	0.880
	Proportion of Total Crashes that are Pedestrian Fatal and Injury Crashes (f_{ped})	
3ST	0.021	0.025
4ST	0.022	0.016
	Proportion of Total Crashes that are Bicycle Fatal and Injury Crashes (f_{bike})	
3SG	0.011	0.016
3ST	0.016	0.022
4SG	0.015	0.023
4ST	0.018	0.028

The research team next tested the statistical differences for the total predicted crash frequency by facility types for Oregon to those represented by the HSM default values. In addition, the project team compared the “by year” values to the “combined year” values. The results and how they affected the overall calibration procedure are further addressed in Section 6.2 of this report.

As shown in Table 5.7 the authors also noted an obvious difference in crash severity level between default values and the Oregon-derived values. The Oregon-derived values depicted a larger proportion of fatal and injury level crashes from the larger reported crash population. The difference may be associated with the Oregon self-reporting crash rules or may also be due to the various reporting thresholds (\$1500 for an Oregon PDO compared to \$700 and \$750 in the neighboring states – coincidentally the states used for the HSM default values). As a result of this disparity in crash severity reporting, the authors elected to develop calibration factors for the fatal and injury level in addition to those for total crashes. The results of this analysis are presented in Section 6.3.

5.6 SUMMARY OF DATA ANALYSIS

In this section, the authors reviewed the methods for determining homogeneous segments, assignment of historic crash data, estimation for rural road minor AADT values, calculation of calibration factors, and the potential influence of using the HSM locally-derived factors for the calibration process. Upon completion of these steps, the procedures as identified must then be applied to the larger-scale calibration effort for the State of Oregon. Section 6.0 reviews the results of this overall process.

6.0 CALIBRATION RESULTS

Section 5.0 demonstrated the steps required to perform the large-scale effort for the Oregon calibration of the HSM predictive methods. In this section, the research team provides the overall results for this calibration effort. In addition, the authors demonstrate statistical comparisons between using default proportions and using locally-derived values for crash severity and crash type as a part of the analysis effort.

6.1 CALIBRATION FACTORS BASED ON DEFAULT PROPORTIONS

To effectively use the HSM predictive methods in a local setting, it is necessary to develop calibration factors for all facility types. Previously this report reviewed the process to develop calibration factors and further identified a basic assumption in the HSM that default proportions for crash types and severity could influence the calibration results. Table 6.1: Estimated Calibration Factors for Oregon (based on HSM default crash proportions) depicts the calibration results developed using the default distribution values included in the HSM. The table demonstrates that for most facility types, the calibration factors have values smaller than 1.0 except for urban 4-leg signalized intersections and urban 4-lane divided facilities.

The calibration factor (1.43) for the urban four-lane divided facility merits additional discussion since it is so much different than the other facilities. In Oregon urban areas, the four-lane divided facility on state highway is not common. The research team identified only 5.87 miles to be used in the calibration data statewide. Many of these segments became divided after the installation of access management medians (prior to 2004); facilities designed as “true” divided sections were a small subset of the calibration data. Thus, this calibration factor likely reflects 1) the small sample size, and 2) the difference between the higher design standards of the four-lane divided facilities in the HSM SPF's data set and the segments in the Oregon calibration set. When using the HSM for future facilities, it is not recommended that the calculated Oregon calibration factor be used for these urban four-lane divided segments. This approach would introduce scenarios where the four-lane divided facility appears less safe than undivided facilities. It would be reasonable to apply the calibration factor estimate for the other multi-lane facilities (0.64 or 0.65) in this case.

One optimistic explanation for the generally low (less than 1.0) results could be that the Oregon highways are much safer than other states due to a different, possibly more conservative driving population and less inclement weather. It is likely, however, that the drivers in Oregon are similar to those in other states and the reasons for the observed disparity are due to a much more obvious issue.

The State of Oregon is a self-reporting state. Therefore, in the State of Oregon, when a person is involved in a crash which does not have injuries, the involved drivers are not legally required to report the crash. If a person is involved in a crash which causes injury, death, more than \$1,500

damage to vehicles, or more than \$1,500 damage to vehicles and towing of another vehicle, the person is required to file an Oregon Traffic Accident and Insurance Report within 72 hours. The police will also file reports if they respond to an injury crash, but it is likely that many property-damage-only (PDO) crashes are simply never reported in Oregon. It can then be expected that if the total crash population is further subdivided into severity levels, the PDO proportion is quite likely to be much smaller in Oregon than in neighboring states. Similarly, this would cause the proportion of fatal and injury crashes (out of the total crashes) to be a much larger value. Table 5.7 confirms this unbalanced proportion of PDO crashes as compared to the HSM default values (based on the State of Washington).

An additional issue that will likely influence the comparison of crash proportions is the actual reporting threshold. The State of Oregon has a \$1500 reporting threshold for PDO crashes while our neighboring states of Washington and California have PDO reporting thresholds of \$700 and \$750 respectively. This substantial difference in crash reporting thresholds would mean that crashes that must be reported in Washington and California (above \$700 or \$750 in damage but below \$1500) would not be reported in Oregon. As a result, the project team evaluated calibration of the HSM predictive methods with the use of default values and also with locally-developed Oregon values. The use of the values shown in Table 6.1, therefore, should be used cautiously since the default values directly influence select CMFs used in the calibration process.

Table 6.1: Estimated Calibration Factors for Oregon (based on HSM default crash proportions)

Facility Type	n	Observed (O) and Predicted (P) Crashes								Calibration Factor				
		2004		2005		2006		2004-2006		2004	2005	2006	2004-2006	
		O	P	O	P	O	P	O	P	C ₂₀₀₄	C ₂₀₀₅	C ₂₀₀₆	C ₀₄₋₀₆	
SEGMENTS														
<i>Rural Two Lane</i>														
R2	2-lane undivided	75	123	180	139	176	132	177	394	533	0.68	0.79	0.75	0.74
<i>Rural Multilane</i>														
MRU	Undivided	50	111	337	138	332	115	334	364	1003	0.33	0.42	0.34	0.36
MRD	Divided	19	17	25	15	25	26	25	58	75	0.69	0.60	1.03	0.78
<i>Urban and Suburban Arterials</i>														
U2U	2-lane undivided	491	126	201	98	200	153	200	377	602	0.63	0.49	0.76	0.63
U3T	3-lane with TWLTL	205	74	89	70	86	71	87	215	262	0.83	0.81	0.81	0.82
U4D	4-lane divided	86	43	37	60	38	58	38	161	113	1.16	1.60	1.53	1.43
U4U	4-lane undivided	375	153	266	167	262	186	256	506	783	0.58	0.64	0.73	0.65
U5T	5-lane with TWLTL	323	273	402	259	405	240	400	772	1207	0.68	0.64	0.60	0.64
INTERSECTIONS														
<i>Rural Two Lane</i>														
R3ST	3-leg, minor STOP	200	31	115	43	113	34	114	108	342	0.27	0.38	0.30	0.32
R4ST	4-leg, minor STOP	200	67	220	59	216	78	216	204	652	0.31	0.27	0.36	0.31
R4SG	4-leg, signalized	25	38	99	51	99	53	102	142	300	0.38	0.51	0.52	0.47
<i>Rural Multilane</i>														
MR3ST	3-leg, minor STOP	100	16	80	10	78	11	78	37	236	0.20	0.13	0.14	0.16
MR4ST	4-leg, minor STOP	107	48	150	58	149	72	148	178	446	0.32	0.39	0.49	0.40
MR4SG	4-leg, signalized	34	51	352	49	352	57	349	157	1053	0.14	0.14	0.16	0.15
<i>Urban and Suburban Arterials</i>														
U3ST	3-leg, minor STOP	73	42	101	31	96	30	98	103	296	0.41	0.32	0.31	0.35
U4ST	4-leg, minor STOP	48	39	81	29	76	37	80	105	237	0.48	0.38	0.46	0.44
U3SG	3-leg, signalized	49	109	143	103	144	109	140	321	427	0.76	0.72	0.78	0.75
U4SG	4-leg, signalized	57	232	209	235	209	223	207	690	625	1.11	1.13	1.08	1.10

6.2 DEFAULT PROPORTIONS VERSUS LOCALLY-DERIVED PROPORTIONS

It is important to understand if there is a difference in the total predicted crash frequencies of all sites between using default proportions and locally-derived proportions. The project team used annual as well as multi-year comparisons to evaluate the influence of the use of locally-derived proportions on the overall number of predicted crashes. A straightforward comparison method for evaluating values calculated using the default proportions and values determined using locally-derived proportions is the paired t-test. Table 6.2, Table 6.3, and Table 6.4 show the t-test results for three comparison tests (annual comparison, comparison of three year average, and comparison of annual values then averaged) for the rural facilities. The rural multilane four-leg signalized intersection is not included in this analysis since the HSM SPF for this particular facility does not include base conditions (so there are not any CMFs applied to this facility that could be affected by the default versus locally-derived question).

Table 6.2: Initial Comparison: HSM Default Proportions versus Locally-Derived Proportions (for each year) – Rural Facilities

Facility Type	HSM Default Proportions		Locally-Derived Proportions (each year)		Outputs
	Total Crashes	Sample size	Total Crashes	Sample size	
R2	532.82	75	527.15	75	p-value 0.3027 T -1.1124 df 7 Confidence Interval (-9.50,3.42)
R3ST	342.15	200	343.39	200	
R4ST	651.54	200	656.17	200	
R4SG	299.96	25	317.51	25	
MRU	1003.12	50	997.25	50	
MRD	74.77	19	74.97	19	
MR3ST	235.95	100	238.92	100	
MR4ST	446.09	107	455.36	107	

Table 6.3: Second Comparison: HSM Default Proportions versus Locally-Derived Proportions (average of three years) – Rural Facilities

Facility Type	HSM Default Proportions		Locally-Derived Proportions (average three years)		Outputs
	Total Crashes	Sample size	Total Crashes	Sample size	
R2	532.82	75	528.81	75	p-value 0.3216 T -1.0665 df 7 Confidence Interval (-9.26,3.50)
R3ST	342.15	200	343.52	200	
R4ST	651.54	200	655.01	200	
R4SG	299.96	25	317.51	25	
MRU	1003.12	50	995.82	50	
MRD	74.77	19	75.01	19	
MR3ST	235.95	100	239.16	100	
MR4ST	446.09	107	454.58	107	

Table 6.4: Third Comparison: HSM Default Proportions versus Locally-Derived Proportions (three years then averaged) – Rural Facilities

Facility Type	Derived Proportions (each year)		Locally-Derived Proportions (average three years)		Outputs
	Total Crashes	Sample size	Total Crashes	Sample size	
R2	527.15	75	528.81	75	p-value 0.6486 T 0.476 df 7 Confidence Interval (-0.65,0.98)
R3ST	343.39	200	343.52	200	
R4ST	656.17	200	655.01	200	
R4SG	317.51	25	317.51	25	
MRU	997.25	50	995.82	50	
MRD	74.97	19	75.01	19	
MR3ST	238.92	100	239.16	100	
MR4ST	455.36	107	454.58	107	

Table 6.5: Fourth Comparison: HSM Default Proportions versus Locally-Derived Proportions (three years) – Urban and Suburban Facilities

Facility Type	HSM Default Proportions		Locally-Derived Proportions (three years)		Outputs
	Total Crashes	Sample size	Total Crashes	Sample size	
U3ST	295.60	73	290.57	73	p-value 0.068169 T 1.859548 df 8
U4ST	237.15	48	231.19	48	
U3SG	426.60	49	438.77	49	
U4SG	625.29	57	654.37	57	
U2U	601.50	491	609.77	491	
U3T	262.19	73	266.63	73	
U4D	112.51	86	114.04	86	
U4U	783.30	375	802.51	375	
U5T	1207.15	323	1214.38	323	

These three analysis tables (Table 6.2: , Table 6.3 and, Table 6.4:) show that p-values for all three comparisons are larger than 0.05. This indicates that there is no significant difference between the three methods. Table 6.5 shows the results of this comparison for the urban and suburban facilities. In an aggregate sense, the difference in estimating total crashes of using the HSM defaults of the locally derived proportions is not statistically significant ($p=0.068$). Note however, that the difference for the urban models is greater than for any of the comparisons completed for the rural sections.

If agencies do not have available data to generate locally-derived values, they can confidently use default values to estimate **total** crashes. If however, the interest is in specific distributions of

crash types (e.g. single vehicle crashes by type), then the agency would be advised to use the locally-derived proportions.

For Oregon calculations, the research team recommends the use of the local proportions provided in the Appendix.

6.3 CALIBRATION FACTORS FOR TOTAL CRASHES VERSUS FATAL PLUS INJURY CRASHES

Since the Oregon-derived severity levels are significantly different than the HSM default proportions, the authors next considered if calibration factors for total crashes should be used in Oregon or if a more accurate approach would be the use of Oregon fatal plus injury crashes when predicting crashes. The HSM predictive method chapters vary based on the time of initial development and method evolution. For example, the rural two-lane two-way chapter (Chapter 10 of the HSM) includes models that can only predict total crashes. The urban and suburban chapter (Chapter 12 of the HSM) includes a variety of severity-level models.

Based on the previous comparison for the fatal plus injury crashes in Oregon compared to the HSM default values, the project team pursued the option that a more accurate way to apply the HSM predictive methods to the State of Oregon (particularly for the rural two-lane roads) may be to develop calibration factors specifically for the fatal plus injury crashes. Table 6.6 depicts the fatal plus injury calibration factors for the rural two-lane two-way roads. Since the values shown for fatal plus injury are less likely to be subjected to the self-report and reporting threshold issues previously identified for Oregon, the project team anticipates that the use at some future time of these severity models as they will more accurately reflect expected crash conditions in Oregon. The current HSM calibration sampling technique is based on total crashes, so the severity calibration values used in this analysis for fatal and injury crashes is shown for the purposes of demonstrating this future need for severity model calibration methods.

Table 6.6: Calibration Comparison for Total Crashes versus Fatal plus Injury (Rural Two-Lane, Two-Way Roads) Using HSM-Proportional Values

Rural Two-Lane, Two-Way Facility	R2	R3ST	R4ST	R4SG
Sample Size (Sites)	75	200	200	25
Observed Crashes (Total for 2004 to 2006)	394	108	204	142
Observed Crashes (Fatal and Injury)	196	58	135	73
Predicted Crashes (Total for 2004 to 2006)	533	342	652	300
Predicted (Adjusted by Local Proportions)	171	142	281	108
Calibration Factor (Total)	0.74	0.32	0.31	0.47
Calibration Factor (Fatal and Injury)	1.15	0.41	0.48	0.67

Table 6.6 indicates that for rural two-lane, two-way roads in Oregon, the calibration factors for fatal and injury crashes are larger than calibration factors for total crashes. Similarly, Table 6.7 compares the values of fatal and injury calibration factors for the rural multilane facilities to those for total crashes. For rural multilane highways, the difference between calibrations factors of total crashes and fatal plus injury crashes is not significant.

Table 6.7: Calibration Comparison for Total Crashes versus Fatal plus Injury (Rural Multilane Highways) Using HSM-Proportional Values

Rural Multilane Facility	MRU	MRD	MR3ST	MR4ST	MR4SG
Sample Size (Sites)	50	19	100	107	34
Observed Crashes (Total for 2004 to 2006)	364	58	37	178	157
Observed Crashes (Fatal and Injury)	153	25	20	96	76
Predicted Crashes (Total for 2004 to 2006)	1003	75	236	446	1053
Predicted (Using SPFs for fatal and injury)	579	37	89	199	452
Calibration Factor (Total)	0.36	0.78	0.16	0.40	0.15
Calibration Factor (Fatal and Injury)	0.26	0.68	0.23	0.48	0.17

The urban and suburban chapter includes models for total, fatal and injury, and PDO crashes. The predictive procedures, however, only call for use of one calibration factor per facility generated from total crashes. The calibration procedure can be analyzed to produce calibration factors for each severity level. Table 6.8 and Table 6.9 show the results of the analysis to produce calibration factors for each severity level. Factors are produced for both HSM-defaults and local proportions. Like the rural two-lane, two-way facilities there are significant differences in calibration factors by severity level, particularly for segments. If as suggested in the HSM procedures, the total calibration factor is applied to all severity models the result will be to underestimate the number of crashes in the fatal and injury category. The tables indicate that some severity models predict Oregon crashes (calibration factor approximately equal to one). The primary gap is in PDO predictions. These differences are explained by the underreporting issue described earlier.

When the interest is in predicting severity-level crashes, it is feasible that an Oregon agency could use the calibration factor for each severity level; however, this should be performed with caution as the sample size used for the HSM method is based on total crashes (so the Oregon severity level crashes may not represent an adequate study sample size). When severity models are present for the HSM predictive procedure, such as for the urban models, a rebalancing equation should be applied to confirm that the predicted total crashes are the sum of fatal and injury plus PDO. This rebalancing equation is applied prior to the calibration factor application but before the CMF application and calibration factor. To apply separate severity calibration factors, the HSM procedures need to be modified to apply the rebalancing equation after the severity-specific calibration factors.

Table 6.8: Calibration Comparison for Total Crashes versus Fatal plus Injury (Urban and Suburban Intersections)

Urban and Suburban Arterials, Intersections		U3ST	U4ST	U3SG	U4SG
	Sample Size (Sites)	73	48	49	57
Observed Crashes	Total	103	105	321	690
	Fatal and Injury	55	50	161	328
	PDO	48	55	160	362
Predicted, HSM Defaults	Total	295.60	237.15	426.60	625.29
	Fatal and Injury	108.30	92.48	150.79	241.76
	PDO	187.29	144.66	275.81	383.53
Predicted, Local Derived	Total	290.57	231.19	438.77	654.37
	Fatal and Injury	118.13	98.30	156.17	254.85
	PDO	172.35	132.88	282.45	399.14
Calibration Factor, HSM Defaults	Total	0.348	0.443	0.752	1.103
	Fatal and Injury	0.508	0.541	1.068	1.357
	PDO	0.256	0.380	0.580	0.944
Calibration Factor, Local Derived	Total	0.354	0.454	0.732	1.054
	Fatal and Injury	0.466	0.509	1.068	1.287
	PDO	0.279	0.414	0.566	0.907

Table 6.9: Calibration Comparison for Total Crashes versus Fatal plus Injury (Urban and Suburban Arterials)

Urban and Suburban Arterials, Segments		U2U	U3T	U4D	U4U	U5T
	Sample Size (Sites)	491	73	86	375	323
Observed Crashes	Total	377	215	161	506	772
	Fatal and Injury	177	88	62	235	323
	PDO	200	127	99	271	449
Predicted, HSM Defaults	Total	601.50	262.19	112.51	783.30	1207.15
	Fatal and Injury	177.58	75.87	32.09	245.38	350.08
	PDO	423.89	186.30	80.42	537.93	857.11
Predicted, Local Derived	Total	609.77	266.63	114.04	802.51	1214.38
	Fatal and Injury	216.83	89.84	35.77	274.25	434.75
	PDO	392.98	176.81	78.29	528.28	779.63
Calibration Factor, HSM Defaults	Total	0.627	0.820	1.431	0.646	0.640
	Fatal and Injury	0.997	1.160	1.932	0.958	0.923
	PDO	0.472	0.682	1.231	0.504	0.524
Calibration Factor, Local Derived	Total	0.618	0.806	1.412	0.631	0.636
	Fatal and Injury	0.816	0.979	1.734	0.857	0.743
	PDO	0.509	0.718	1.265	0.513	0.576

6.4 CALIBRATION FACTORS FOR TOTAL CRASHES BY GEOGRAPHIC REGION

Given Oregon's diverse climate and geography, the research team explored the differences if the calibration factor was calculated for the state's different geographic regions. In previous work, the research team divided Oregon's geography into nine climate zones based on the mean annual days of measurable snowfall exceeding 0.25 cm (0.1 in) and the mean annual days when the temperature fell below freezing (*Monsere et al. 2008*). These data were obtained from the 2002 National Oceanic and Atmospheric Administration's (NOAA) Climate Atlas of the United States. These zones are shown in Figure 6.1. Though this work was based on examining speed and ice related crashes, it accurately captures the primary geographic and weather differences in the state.

The research team conducted this exploratory analysis only for urban and suburban segments and the results are shown in Table 6.10. The table shows the facility type, the climate zone, the statewide calibration factor, a calibration factor that estimated only segments in each zone, the difference between the zones, and the number of segments and observed crashes. For all of the facility types, the largest sample of segments and crashes is in zone 2, which represents the Willamette Valley. The statewide calibration factor most closely matches the zone 2 calibration factor. While the calibration factors for each zone do differ from the statewide estimate, none of the other zones are close to having the minimum number of crashes per facility type (100 crashes per year for three years or 300 total crashes) required of the calibration procedure. Zone 1 (which is essentially all of the coastal urbanized areas along US101) has the next highest sample. However, even inclusion of an additional two years of data or aggregation of other zones does not bring the samples up to the necessary minimum. Thus, the authors' conclusion is that data collection efforts and sample size limit the calibration factor to one statewide value. When the predictive models are applied with the EB procedure, additional local differences will be accounted for by the inclusion of site-specific historical crash data.

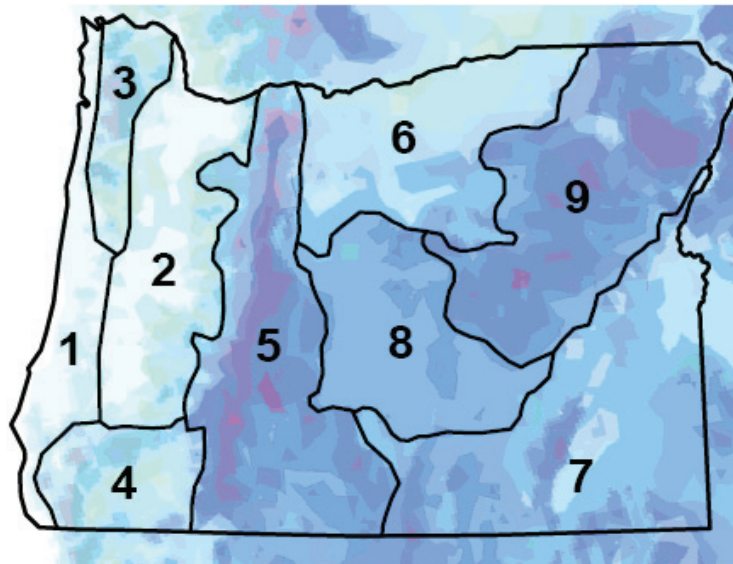


Figure 6.1: Climate Zones, Oregon

Table 6.10: Calibration Comparison for Total Crashes by Climate Zone (Urban and Suburban Arterials) Using HSM-Default Values

Climate Zone	Facility	Crash Calibration Factor, 2004-2006		Difference (B-A)	Sample Size	3-Year Observed Crash Count
		Statewide (A)	By Climate Zone (B)			
1	2U	0.627	0.517	-0.11	156	34
2	2U		0.615	-0.01	927	283
4	2U		0.955	0.33	147	26
6	2U		0.904	0.28	75	17
8	2U		0.659	0.03	78	12
9	2U		0.434	-0.19	90	5
1	3T	0.820	0.660	-0.16	198	59
2	3T		1.075	0.25	240	120
4	3T		0.167	-0.65	24	4
6	3T		0.411	-0.41	39	3
8	3T		1.484	0.66	12	5
9	3T		0.906	0.09	102	24
1	4D	1.431	2.311	0.88	24	8
2	4D		1.500	0.07	171	107
4	4D		3.147	1.72	18	10
8	4D		1.042	-0.39	45	36
1	4U	0.646	0.994	0.35	123	90
2	4U		0.630	-0.02	723	367
4	4U		0.533	-0.11	75	27
5	4U		0.387	-0.26	15	2
6	4U		0.577	-0.07	81	12
8	4U		0.259	-0.39	15	4
9	4U		0.218	-0.43	87	4
1	5T	0.640	0.811	0.17	63	58
2	5T		0.653	0.01	786	626
4	5T		0.401	-0.24	30	23
5	5T		0.553	-0.09	84	65
8	5T		0.000	-0.64	6	0

6.5 SUMMARY OF CALIBRATION RESULTS

As shown in this section, there are a wide variety of ways to develop the calibration factors for the HSM procedures. The method for incorporating the locally-derived severity and crash type proportions can vary; however, analysis shows that the resulting values are not statistically different. As a result, an agency can use the HSM default values without creating substantially different results when considering total crashes. A second issue associated with using the calibration factors in conjunction with the HSM default values is that the rural two-lane road models were developed only for total crashes. The inclusion of severity based methods requires the use of the default values and for the HSM Chapter 10 models, the resulting fatal plus injury calibration factors do substantially differ.

7.0 CONCLUSIONS

This report summarizes the results of the efforts to generate calibration factors for the predictive models in the HSM. Though the adaptation of the HSM calibration method is a straightforward procedure, this report highlights a few key issues identified during the creation of the Oregon calibration factors.

7.1 DATA COLLECTION ISSUES

The data set can be time consuming to develop and the HSM recommended sample size of 100 crashes per year does not apply to all facilities. It is reasonable to adjust sample size expectations for under-represented facility types by basing an assumption on average crash history for similar facilities. The most difficult data variables to acquire for this effort were urban intersection pedestrian volumes, minor-road signal phasing, and minor road AADT values for rural intersection locations. If possible, efforts should be made to modify data inventories to include:

- Minor road AADT,
- Signal phasing information in urban areas,
- Presence of lighting,
- Presence of centerline rumble strips, and
- Urban intersection pedestrian volumes.

Though the following information would be useful, it would be much harder to systematically collect. These elements would be recommended for a lower priority of data collection:

- Driveway density and type,
- Presence and type of parking,
- Roadside hazard rating,
- Side slope,
- Roadside fixed object density, and
- Average offset to fixed objects.

The acquisition of these high and lower priority inventory items would allow HSM predictive procedures to be applied on a network-level for screening and other purposes. This report provides recommendations and assumptions to overcome these potential data deficiencies. Since it is not likely that pedestrian counts will be obtained on a wide-scale, some effort should be made to model or adapt other models based on land-use to predict pedestrian volumes.

7.2 CALIBRATION FACTORS

The primary observation from this analysis is that Oregon calibration factors for total crashes highlight that the current Oregon crash reporting procedures and thresholds introduce a significant difference in observed crash proportions. As a result, the use of severity-based calibration factors or Oregon-specific fatal plus injury SPFs seems more appropriate for cost-benefit based decisions. The calibration factor for the urban four-lane divided facility should be used with care. This calibration factor likely reflects 1) the small sample size, and 2) the difference between the higher designs of the four-lane divided facilities in the HSM SPFs data set and the segments in the Oregon calibration set. When using the HSM for future urban four-lane divided facilities, it is not recommended that the calculated Oregon calibration factor be used. The use of this factor would introduce scenarios where the four-lane divided facility appears less safe than undivided facilities. It would be reasonable to apply the calibration factor estimate for the other multi-lane facilities (0.64) in this case.

Though the report did not review this, it is important to note that the road characteristic data developed for the purposes of calibration can be preserved and calibration factors can be updated for future years (with future observed crashes and updated AADT values) with minimal additional effort. However, after some time, it is likely that improvements or modifications have been made to some of the calibration intersections or segments and the data will need to be recollected.

To enhance precision, the research team recommends the use of the HSM calibration factors developed with local proportions and the use of local proportions in all calculations. These recommended calibration factors are summarized in Table 7.1. The actual locally derived crash type proportions are included in the Appendix of the report.

Table 7.1: Recommended Oregon HSM Calibration Factors (based on locally derived crash proportions)

Facility Type		Observed Crashes	Predicted Crashes	Calibration Factor, C
SEGMENTS				
<i>Rural Two-Lane</i>				
R2	2-lane undivided	394	529	0.74
<i>Rural Multilane</i>				
MRU	Undivided	364	996	0.37
MRD	Divided	58	75	0.77
<i>Urban and Suburban Arterials</i>				
U2U	2-lane undivided	377	610	0.62
U3T	3-lane with TWLTL	215	267	0.81
U4D	4-lane divided	161	114	1.411
U4U	4-lane undivided	506	803	0.63
U5T	5-lane with TWLTL	772	1214	0.64
INTERSECTIONS				
<i>Rural Two-Lane</i>				
R3ST	3-leg, minor STOP	108	344	0.31
R4ST	4-leg, minor STOP	204	655	0.31
R4SG	4-leg, signalized	142	318	0.45
<i>Rural Multilane</i>				
MR3ST	3-leg, minor STOP	37	239	0.15
MR4ST	4-leg, minor STOP	178	455	0.39
MR4SG	4-leg, signalized	157	1053	0.15
<i>Urban and Suburban Arterials</i>				
U3ST	3-leg, minor STOP	103	291	0.35
U4ST	4-leg, minor STOP	105	231	0.45
U3SG	3-leg, signalized	321	439	0.73
U4SG	4-leg, signalized	690	654	1.05

1 Use with caution (see discussion in text). If using the SPFs to evaluate future facilities use calibration factor of 0.64

7.3 FUTURE WORK

The use of the HSM predictive methods creates a promising procedure for quantitative safety evaluations; however, the calibration application for Oregon crash conditions highlights several issues with the procedure that should be addressed. These include ways to address variability in reporting thresholds, methods for developing critical variable information that is not available in state databases (such as minor road AADT values), and alternative procedures for sample size estimation at facilities with historically low crash conditions. In addition, it appears a logical next step in the evolution of this calibration process would be to examine the functional form of the SPFs and determine if the local SPFs reflect a similar form since the current calibration procedure assumes a linear relationship based simply on a proportional adjustment.

Two future efforts that the authors recommend ODOT should pursue includes:

- Monitor improvements and crash conditions for the calibration sites used for this project. It is advisable to periodically update the calibration factors for these locations as crash conditions change over time.
- Though the HSM calibration procedure targets total crashes and the sample sizes are based on this overall crash summary, evidence from this calibration effort suggests that future evaluation of severity model calibration factors is advisable for Oregon databases.

This research effort identified several recommendations that should be considered for future editions of the HSM. First, the one-size-fits-all sample size does not appear to be appropriate for all facility types and should be enhanced. In addition, the calibration of severity-level models requires additional consideration. The HSM severity-model rebalancing procedure should be incorporated into the calibration process and sample size techniques appropriate for the severity-level models are needed. The calibration factors developed for this effort are suitable for evaluations within a jurisdiction, but the overall HSM calibration techniques should address the severity-level and sample size considerations before comparing predicted, calibrated crash frequencies between different jurisdictions that have varying reporting thresholds or procedures.

8.0 REFERENCES

- American Association of State Transportation Officials. *Highway Safety Manual*. AASHTO, Washington, D.C., 2010.
- California Department of Motor Vehicles. 2011. <http://dmv.ca.gov/forms/sr/sr1.htm>. Accessed on January 11, 2011.
- Dixon, K. K., and J. Rohani. *Methodologies for Estimating Curve Speeds on Oregon Highways*. SPR 641, FHWA-OR-RD-08-04, Oregon Department of Transportation, Salem, Oregon, 2008.
- Mohamad, D., K.C. Sinha, T. Kuczek, and C.F. Scholer. 1998. Annual Average Daily Traffic Prediction Model for County Roads. In *Transportation Research Record*, No. 1617, Transportation Research Board. National Research Council. Washington, D.C., 1968, pp. 69-77.
- Monsere, C., and D. Chi. *A Strategy for Reducing the Impact of Driving Under Influence of Intoxicants in Portland, Oregon*. Portland State University, Intelligent Transportation Systems Lab, Research Report CSTSP 08-01, March 2008
- Monsere, C.M, P.G. Bosa, R.L. Bertini. Combining Climate, Crash, and Highway Data for Improved Ranking of Speed and Winter-Weather Related Crash Locations in Oregon. *Journal of Transportation Engineering*, Vol. 134(7), 2008, pp. 287-296.
- Ramsey, F.L., and D.W. Schafer. *The Statistical Sleuth – A Course in Methods of Data Analysis, Second Edition*. Duxbury Thomson Learning, Pacific Grove, California, 2002.
- Rawlings, J.O., S.G. Pantula, and D.A. Dickey. *Applied Regression Analysis – A Research Tool, Second Edition*. Springer-Verlag, New York, 1998.
- Washington State Patrol. *Police Traffic Collision Report Instruction Manual, 7th edition*. Located at <http://www.wsp.wa.gov/publications/forms/pctrmanl.pdf>, Revised July 2006.

APPENDIX A – ABBREVIATION TABLE

Table A.1: Abbreviations Used in Report

Abbreviation	Term
2U	Two-Lane Undivided
3T	Three-Lane includes a Two-Way Left-Turn Lane
4D	Four-Lane Divided
4U	Four-Lane Undivided
5T	Five-Lane includes a Two-Way Left-Turn Lane
AADT	Annual Average Daily Traffic
AASHTO	American Association of State Highway and Transportation Officials
C	Calibration factor
CDS	Crash Data System
CMF	Crash Modification Factor (Function)
DVL	Digital Video Log
ft	feet
GIS	Geographic Information Systems
HSM	Highway Safety Manual
Hwy	Highway
ITIS	Integrated Transportation Information System
ITS	Intelligent Transportation System
MAC	Major Collector
MIA	Minor Arterial
MP	Milepoint
MR3ST	Rural Multilane Three-Leg Stop Controlled Intersection
MR4SG	Rural Multilane Four-Leg Signalized Intersections
MR4ST	Rural Multilane Four-Leg Stop Controlled Intersection
MRD	Rural Multilane Divided Segment
MRU	Rural Multilane Undivided Segment
NOAA	National Oceanic and Atmospheric Administration
Nspf	Total predicted crash frequency for a base condition
ODOT	Oregon Department of Transportation
OTREC	Oregon Transportation Research and Education Consortium
PDO	Property-Damage-Only
R2	Rural Two-Lane, Two-Way Undivided Segment
R3ST	Rural Two-Lane, Two-Way Three-Leg Stop Controlled Intersection
R4SG	Rural Two-Lane, Two-Way Four-Leg Signalized Intersections
R4ST	Rural Two-Lane, Two-Way Four-Leg Stop Controlled Intersection
SPF	Safety Performance Function
TWLTL	Two-Way Left-Turn Lane
U3SG	Urban Three-Leg Signalized Intersection
U3ST	Urban Three-Leg Stop-controlled Intersection
U4SG	Urban Four-Leg Signalized Intersection
U4ST	Urban Four-Leg Stop-controlled Intersection
VIF	Variance Inflation Factor

APPENDIX B – LOCALLY-DERIVED VALUES

RURAL TWO-LANE, TWO-WAY ROADWAY SEGMENTS LOCALLY- DERIVED VALUES

Table B.1: 2004 R2 Locally-Derived Crash Severity Values

Crash Severity Level	Locally-Derived Values
Fatal	3.3
Incapacitating Injury	6.2
Non-incapacitating Injury	25.5
Possible Injury	17.2
Total Fatal Plus Injury	52.2
Property Damage Only	47.8
TOTAL	100.0

Table B.2: 2004 R2 Locally-Derived Collision Types

Collision Type	Locally-Derived Values		
	Total fatal and injury	Property damage only	TOTAL (all severity levels combined)
SINGLE-VEHICLE CRASHES			
Collision with animal	3.8	12.0	7.7
Collision with bicycle	0.4	0.0	0.2
Collision with pedestrian	0.8	0.0	0.4
Overtaken	10.4	3.2	7.0
Ran off road	42.1	35.6	39.0
Other single-vehicle crash	1.4	0.6	1.0
Total single-vehicle crashes	58.9	51.4	55.3
MULTIPLE-VEHICLE CRASHES			
Angle collision	0.8	1.1	0.9
Head-on collision	6.8	1.4	4.2
Rear-end collision	18.9	23.0	20.9
Sideswipe collision	5.0	7.3	6.1
Other multiple-vehicle collision	9.6	15.9	12.6
Total multiple-vehicle crashes	41.1	48.6	44.7
TOTAL CRASHES	100.0	100.0	100.0

Table B.3: 2004 R2 Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total nighttime crashes by severity level		Proportion of crashes that occur at night
Fatal and Injury p_{inr}	PDO p_{pnr}	p_{nr}
0.5	0.5	0.27

Table B.4: 2005 R2 Locally-Derived Crash Severity Values

Crash Severity Level	Locally-Derived Values
Fatal	3.1
Incapacitating Injury	7.6
Non-incapacitating Injury	24.5
Possible Injury	19.5
Total Fatal Plus Injury	54.6
Property Damage Only	45.4
TOTAL	100.0

Table B.5: 2005 R2 Locally-Derived Collision Types

Collision Type	Locally-Derived Values		
	Total fatal and injury	Property damage only	TOTAL (all severity levels combined)
SINGLE-VEHICLE CRASHES			
Collision with animal	3.2	10.4	6.4
Collision with bicycle	0.6	0.0	0.3
Collision with pedestrian	0.6	0.0	0.3
Overtaken	7.4	3.3	5.6
Run-off-road	48.0	41.9	45.3
Other single-vehicle crash	1.5	2.1	1.7
Total single-vehicle crashes	61.3	57.6	59.7
MULTIPLE-VEHICLE CRASHES			
Angle collision	0.9	0.5	0.8
Head-on collision	5.7	1.0	3.7
Rear-end collision	19.5	20.7	20.1
Sideswipe collision	4.2	8.3	6.0
Other multiple-vehicle collision	8.4	11.8	9.9
Total multiple-vehicle crashes	38.7	42.4	40.3
TOTAL CRASHES	100.0	100.0	100.0

Table B.6: 2005 R2 Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total nighttime crashes by severity level		Proportion of crashes that occur at night
Fatal and Injury p_{inr}	PDO p_{pnr}	p_{nr}
0.57	0.43	0.29

Table B.7: 2006 R2 Locally-Derived Crash Severity Values

Crash Severity Level	Locally-Derived Values
Fatal	3.0
Incapacitating Injury	9.3
Non-incapacitating Injury	25.6
Possible Injury	17.1
Total Fatal Plus Injury	54.9
Property Damage Only	45.1
TOTAL	100.0

Table B.8: 2006 R2 Locally-Derived Collision Types

Collision Type	Locally-Derived Values		
	Total fatal and injury	Property damage only	TOTAL (all severity levels combined)
SINGLE-VEHICLE CRASHES			
Collision with animal	2.5	13.7	7.6
Collision with bicycle	0.7	0.0	0.4
Collision with pedestrian	1.0	0.0	0.5
Overtaken	8.4	5.1	6.9
Run-off-road	50.5	39.5	45.6
Other single-vehicle crash	2.3	1.0	1.7
Total single-vehicle crashes	65.4	59.4	62.7
MULTIPLE-VEHICLE CRASHES			
Angle collision	0.7	0.4	0.6
Head-on collision	5.0	0.7	3.1
Rear-end collision	17.8	20.6	19.1
Sideswipe collision	4.2	5.7	4.9
Other multiple-vehicle collision	6.8	13.2	9.7
Total multiple-vehicle crashes	34.6	40.6	37.3
TOTAL CRASHES	100.0	100.0	100.0

Table B.9: 2006 R2 Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total nighttime crashes by severity level		Proportion of crashes that occur at night
Fatal and Injury p_{inr}	PDO p_{pnr}	p_{nr}
0.54	0.46	0.29

Table B.10: 2004 -2006 (Three years) R2 Locally-Derived Crash Severity Values

Crash Severity Level	Locally-Derived Values
Fatal	3.1
Incapacitating Injury	7.7
Non-incapacitating Injury	25.1
Possible Injury	18.0
Total Fatal Plus Injury	54.0
Property Damage Only	46.0
TOTAL	100.0

Table B.11: 2004-2006 (Three years) R2 Locally-Derived Collision Types

Collision Type	Locally-Derived Values		
	Total fatal and injury	Property damage only	TOTAL (all severity levels combined)
SINGLE-VEHICLE CRASHES			
Collision with animal	3.1	12.0	7.2
Collision with bicycle	0.6	0.0	0.3
Collision with pedestrian	0.8	0.0	0.4
Overtuned	8.6	3.8	6.4
Run-off-road	47.1	39.1	43.5
Other single-vehicle crash	1.7	1.3	1.5
Total single-vehicle crashes	62.0	56.2	59.3
MULTIPLE-VEHICLE CRASHES			
Angle collision	0.8	0.7	0.8
Head-on collision	5.8	1.0	3.6
Rear-end collision	18.8	21.4	20.0
Sideswipe collision	4.4	7.1	5.6
Other multiple-vehicle collision	8.2	13.5	10.6
Total multiple-vehicle crashes	38.0	43.8	40.7
TOTAL CRASHES	100.0	100.0	100.0

Table B.12: 2004-2006 (Three Years) R2 Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total nighttime crashes by severity level		Proportion of crashes that occur at night
Fatal and Injury p_{inr}	PDO p_{pnr}	p_{nr}
0.54	0.46	0.28

RURAL TWO-LANE, TWO-WAY INTERSECTIONS LOCALLY-DERIVED VALUES

Table B.13: 2004 R3ST, R4ST, and R4SG Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values		
	R3ST	R4ST	R4SG
Fatal	2.1	2.0	0.0
Incapacitating injury	4.6	6.7	2.6
Non-incapacitating injury	21.0	19.0	20.5
Possible injury	23.5	21.0	12.8
Total fatal plus injury	51.2	48.7	35.9
Property damage only	48.8	51.3	64.1
TOTAL	100.0	100.0	100.0

Table B.14: 2004 R3ST, R4ST, and R4SG Locally-Derived Collision Type

Percentage of severity and total crashes by collision type (Locally-Derived Values)									
Collision Type	Three-leg stop-controlled intersections			Four-leg stop-controlled intersections			Four-leg signalized intersections		
	Fatal and Injury	Property damage only	Total	Fatal and injury	Property damage only	Total	Fatal and injury	Property damage only	Total
SINGLE-VEHICLE CRASHES									
Collision with animal	0.0	0.0	0.0	0.0	0.8	0.4	0.0	0.0	0.0
Collision with bicycle	0.8	0.0	0.4	2.4	0.0	1.2	0.0	0.0	0.0
Collision with pedestrian	0.0	0.0	0.0	1.6	0.0	0.8	0.0	0.0	0.0
Overtuned	3.3	0.9	2.1	0.8	0.0	0.4	0.0	0.0	0.0
Run-off-road	12.3	12.9	12.6	3.3	3.9	3.6	0.0	0.0	0.0
Other single-vehicle crash	0.0	0.0	0.0	0.8	0.0	0.4	0.0	0.0	0.0
Total single-vehicle crashes	16.4	13.8	15.1	8.9	4.7	6.7	0.0	0.0	0.0
MULTIPLE-VEHICLE CRASHES									
Angle collision	4.1	10.3	7.1	42.3	34.9	38.5	21.4	24.0	23.1
Head-on collision	2.5	0.0	1.3	0.0	0.0	0.0	0.0	0.0	0.0
Rear-end collision	36.9	35.3	36.1	22.0	14.7	18.3	50.0	44.0	46.2
Sideswipe collision	1.6	0.9	1.3	0.0	0.0	0.0	0.0	0.0	0.0
Other multiple-vehicle collision	38.5	39.7	39.1	26.8	45.7	36.5	28.6	32.0	30.8
Total multiple-vehicle crashes	83.6	86.2	84.9	91.1	95.3	93.3	100.0	100.0	100.0
TOTAL CRASHES	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

Table B.15: 2004 R3ST, R4ST, and R4SG Locally-Derived Values for Nighttime Crashes

Proportion of crashes that occur at night, p_{ni}	
Intersection Type	Locally-Derived Values
3ST	0.189
4ST	0.143
4SG	0.103

Table B.16: 2005 R3ST, R4ST, and R4SG Locally-Derived Crash Severity Values

Collision type	Locally-Derived Values		
	R3ST	R4ST	R4SG
Fatal	0.9	0.9	2.6
Incapacitating injury	4.1	7.1	0.0
Non-incapacitating injury	20.5	20.4	7.7
Possible injury	26.5	24.8	28.2
Total fatal plus injury	52.1	53.1	38.5
Property damage only	47.9	46.9	61.5
TOTAL	100.0	100.0	100.0

Table B.17: 2005 R3ST, R4ST, and R4SG Locally-Derived Collision Type

Percentage of total crashes by collision type (Locally-Derived Values)									
Collision Type	Three-leg stop-controlled intersections			Four-leg stop-controlled intersections			Four-leg signalized intersections		
	Fatal and Injury	Property damage only	Total	Fatal and injury	Property damage only	Total	Fatal and injury	Property damage only	Total
SINGLE-VEHICLE CRASHES									
Collision with animal	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Collision with bicycle	0.0	0.0	0.0	0.8	0.0	0.4	5.9	0.0	2.6
Collision with pedestrian	0.0	0.0	0.0	0.8	0.0	0.4	0.0	0.0	0.0
Overtuned	1.7	0.0	0.9	1.6	1.0	1.3	0.0	0.0	0.0
Run-off-road	11.7	16.2	13.7	0.8	3.1	1.8	0.0	0.0	0.0
Other single-vehicle crash	0.0	1.0	0.5	1.6	0.0	0.9	5.9	0.0	2.6
Total single-vehicle crashes	13.3	17.2	15.1	5.5	4.1	4.9	11.8	0.0	5.1
MULTIPLE-VEHICLE CRASHES									
Angle collision	5.0	3.0	4.1	47.7	28.6	39.4	23.5	31.8	28.2
Head-on collision	0.0	0.0	0.0	0.8	0.0	0.4	0.0	0.0	0.0
Rear-end collision	32.5	31.3	32.0	19.5	17.3	18.6	35.3	40.9	38.5
Sideswipe collision	1.7	4.0	2.7	0.8	0.0	0.4	0.0	0.0	0.0
Other multiple-vehicle collision	47.5	44.4	46.1	25.8	50.0	36.3	29.4	27.3	28.2
Total multiple-vehicle crashes	86.7	82.8	84.9	94.5	95.9	95.1	88.2	100.0	94.9
TOTAL CRASHES	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

Table B.18: 2005 R3ST, R4ST, and R4SG Locally-Derived Values for Nighttime Crashes

Proportion of crashes that occur at night, p_{ni}	
Intersection Type	Locally-Derived Values
3ST	0.142
4ST	0.137
4SG	0.154

Table B.19: 2006 R3ST, R4ST, and R4SG Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values		
	R3ST	R4ST	R4SG
Fatal	0.9	1.5	0.0
Incapacitating injury	6.4	6.3	4.4
Non-incapacitating injury	22.8	25.4	13.3
Possible injury	26.9	20.2	33.3
Total fatal plus injury	57.1	53.3	51.1
Property damage only	42.9	46.7	48.9
TOTAL	100.0	100.0	100.0

Table B.20: 2006 R3ST, R4ST, and R4SG Locally-Derived Collision Type

Percentage of total crashes by collision type (Locally-Derived Values)									
Collision type	Three-leg stop-controlled intersections			Four-leg stop-controlled intersections			Four-leg signalized intersections		
	Fatal and Injury	Property damage only	Total	Fatal and injury	Property damage only	Total	Fatal and injury	Property damage only	Total
SINGLE-VEHICLE CRASHES									
Collision with animal	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Collision with bicycle	1.6	0.0	0.9	2.8	0.0	1.5	0.0	0.0	0.0
Collision with pedestrian	0.8	0.0	0.5	2.8	0.0	1.5	4.3	0.0	2.2
Overtaken	2.4	2.1	2.3	1.4	0.8	1.1	0.0	0.0	0.0
Run-off-road	10.4	12.8	11.4	4.8	10.2	7.4	0.0	0.0	0.0
Other single-vehicle crash	1.6	1.1	1.4	0.0	0.0	0.0	0.0	0.0	0.0
Total single-vehicle crashes	16.8	16.0	16.4	11.7	11.0	11.4	4.3	0.0	2.2
MULTIPLE-VEHICLE CRASHES									
Angle collision	4.8	3.2	4.1	37.2	22.8	30.5	30.4	18.2	24.4
Head-on collision	0.8	0.0	0.5	1.4	0.8	1.1	0.0	0.0	0.0
Rear-end collision	30.4	33.0	31.5	12.4	28.3	19.9	43.5	31.8	37.8
Sideswipe collision	1.6	1.1	1.4	0.7	0.0	0.4	0.0	4.5	2.2
Other multiple-vehicle collision	45.6	46.8	46.1	36.6	37.0	36.8	21.7	45.5	33.3
Total multiple-vehicle crashes	83.2	84.0	83.6	88.3	89.0	88.6	95.7	100.0	97.8
TOTAL CRASHES	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

Table B.21: 2006 R3ST, R4ST, and R4SG Locally-Derived Values for Nighttime Crashes

Proportion of crashes that occur at night, p_{ni}	
Intersection Type	Locally-Derived Values
3ST	0.215
4ST	0.228
4SG	0.133

Table B.22: 2004 to 2006 (Three Years) R3ST, R4ST, and R4SG Locally-Derived Crash Severity Values

Collision type	Locally-Derived Values		
	R3ST	R4ST	R4SG
Fatal	1.3	1.5	0.8
Incapacitating injury	5.0	6.7	2.4
Non-incapacitating injury	21.4	21.7	13.8
Possible injury	25.6	21.9	25.2
Total fatal plus injury	53.4	51.7	42.3
Property damage only	46.6	48.3	57.7
TOTAL	100.0	100.0	100.0

Table B.23: 2004 to 2006 (Three Years) R3ST, R4ST, and R4SG Locally-Derived Collision Type

Percentage of total crashes by collision type (Locally-Derived Values)									
Collision Type	Three-leg stop-controlled intersections			Four-leg stop-controlled intersections			Four-leg signaled intersections		
	Fatal and Injury	Property damage only	Total	Fatal and injury	Property damage only	Total	Fatal and injury	Property damage only	Total
SINGLE-VEHICLE CRASHES									
Collision with animal	0.0	0.0	0.0	0.0	0.3	0.1	0.0	0.0	0.0
Collision with bicycle	0.8	0.0	0.4	2.0	0.0	1.1	1.9	0.0	0.8
Collision with pedestrian	0.3	0.0	0.1	1.8	0.0	0.9	1.9	0.0	0.8
Overtaken	2.5	1.0	1.8	1.3	0.6	0.9	0.0	0.0	0.0
Run-off-road	11.4	13.9	12.6	3.0	5.9	4.4	0.0	0.0	0.0
Other single-vehicle crash	0.5	0.6	0.6	0.8	0.0	0.4	1.9	0.0	0.8
Total single-vehicle crashes	15.5	15.5	15.5	8.8	6.8	7.9	5.6	0.0	2.4
MULTIPLE-VEHICLE CRASHES									
Angle collision	4.6	5.8	5.2	42.2	28.8	35.9	25.9	24.6	25.2
Head-on collision	1.1	0.0	0.6	0.8	0.3	0.5	0.0	0.0	0.0
Rear-end collision	33.2	33.3	33.3	17.7	20.3	18.9	42.6	39.1	40.7
Sideswipe collision	1.6	1.9	1.8	0.5	0.0	0.3	0.0	1.4	0.8
Other multiple-vehicle collision	43.9	43.4	43.6	30.1	43.8	36.5	25.9	34.8	30.9
Total multiple-vehicle crashes	84.5	84.5	84.5	91.2	93.2	92.1	94.4	100.0	97.6
TOTAL CRASHES	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

Table B.24: 2004 to 2006 (Three Year) R3ST, R4ST, and R4SG Locally-Derived Values for Nighttime Crashes

Proportion of crashes that occur at night, p_{ni}	
Intersection Type	Locally-Derived Values
3ST	0.182
4ST	0.172
4SG	0.130

RURAL MULTILANE SEGMENT LOCALLY-DERIVED VALUES

Table B.25: 2004 MRU Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury	PDO
Head-on	0.036	0.056	0.074	0.019
Sideswipe	0.183	0.132	0.173	0.228
Rear-end	0.359	0.368	0.185	0.352
Angle	0.010	0.007	0.012	0.012
Single	0.294	0.319	0.370	0.272
Other	0.118	0.118	0.185	0.117
Single Vehicle run-off-road, Head-on, Sideswipe	0.399			

^a Note: Using the KABCO scale, these include only KAB crashes. Crashes with severity level C (possible injury) are not included.

Table B.26: 2004 MRU Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
0.571	0.429	0.206

Table B.27: 2004 MRD Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Head-on	0.055	0.067	0.067	0.047
Sideswipe	0.123	0.100	0.133	0.140
Rear-end	0.356	0.333	0.133	0.372
Angle	0.000	0.000	0.000	0.000
Single	0.411	0.467	0.600	0.372
Other	0.055	0.033	0.067	0.070
Single Vehicle run-off-road, Head-on, Sideswipe	0.493			

^a Note: Using the KABCO scale, these include only KAB crashes. Crashes with severity level C (possible injury) are not included.

Table B.28: 2004 MRD Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
0.550	0.450	0.274

Table B.29: 2005 MRU Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and Injury	Fatal and Injury	PDO
Head-on	0.049	0.092	0.155	0.012
Sideswipe	0.146	0.096	0.100	0.188
Rear-end	0.329	0.367	0.200	0.297
Angle	0.019	0.028	0.036	0.012
Single	0.344	0.339	0.436	0.348
Other	0.114	0.078	0.073	0.145
Single Vehicle run-off-road, Head-on, Sideswipe	0.435			

^a Note: Using the KABCO scale, these include only KAB crashes. Crashes with severity level C (possible injury) are not included.

Table B.30: 2005 MRU Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
0.518	0.482	0.241

Table B.31: 2005 MRD Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Head-on	0.000	0.000	0.000	0.000
Sideswipe	0.206	0.080	0.091	0.289
Rear-end	0.397	0.440	0.455	0.368
Angle	0.000	0.000	0.000	0.000
Single	0.365	0.480	0.455	0.289
Other	0.032	0.000	0.000	0.053
Single Vehicle run-off-road, Head-on, Sideswipe	0.492			

^a Note: Using the KABCO scale, these include only KAB crashes. Crashes with severity level C (possible injury) are not included.

Table B.32: 2005 MRD Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
0.389	0.611	0.286

Table B.33: 2006 MRU Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Head-on	0.040	0.083	0.118	0.012
Sideswipe	0.148	0.101	0.097	0.178
Rear-end	0.305	0.339	0.194	0.283
Angle	0.014	0.024	0.032	0.008
Single	0.390	0.375	0.473	0.399
Other	0.103	0.077	0.086	0.120
Single Vehicle run-off-road, Head-on, Sideswipe	0.458			

^a Note: Using the KABCO scale, these include only KAB crashes. Crashes with severity level C (possible injury) are not included.

Table B.34: 2006 MRU Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
0.357	0.643	0.263

Table B.35: 2006 MRD Locally-Derived Crash Severity Values

Collision type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Head-on	0.021	0.059	0.067	0.000
Sideswipe	0.128	0.000	0.000	0.200
Rear-end	0.170	0.235	0.200	0.133
Angle	0.021	0.059	0.067	0.000
Single	0.574	0.588	0.600	0.567
Other	0.085	0.059	0.067	0.100
Single Vehicle run-off-road, Head-on, Sideswipe	0.574			

^a Note: Using the KABCO scale, these include only KAB crashes. Crashes with severity level C (possible injury) are not included.

Table B.36: 2006 MRD Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
0.412	0.588	0.362

Table B.37: 2004 to 2006 (Three Years) MRU Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Head-on	0.040	0.083	0.118	0.012
Sideswipe	0.148	0.101	0.097	0.178
Rear-end	0.305	0.339	0.194	0.283
Angle	0.014	0.024	0.032	0.008
Single	0.390	0.375	0.473	0.399
Other	0.103	0.077	0.086	0.120
Single Vehicle run-off-road, Head-on, Sideswipe	0.458			

Table B.38: 2004 to 2006 (Three Years) MRU Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
0.357	0.643	0.263

Table B.39: 2004 to 2006 (Three Years) MRD Locally-Derived Crash Severity Values

Collision type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Head-on	0.027	0.042	0.049	0.018
Sideswipe	0.153	0.069	0.073	0.207
Rear-end	0.322	0.347	0.244	0.306
Angle	0.005	0.014	0.024	0.000
Single	0.437	0.500	0.561	0.396
Other	0.055	0.028	0.049	0.072
Single Vehicle run-off-road, Head-on, Sideswipe	0.514			

Table B.40: 2004 to 2006 (Three Years) MRD Locally-Derived Values for Nighttime Crashes

Locally-Derived Values		
Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
0.455	0.545	0.301

RURAL MULTILANE INTERSECTIONS LOCALLY-DERIVED VALUES

Table B.41: 2004 MR3ST Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Three-leg intersections with minor road stop control				
Head-on	0.009	0.008	0.014	0.011
Sideswipe	0.005	0.000	0.000	0.011
Rear-end	0.269	0.320	0.155	0.202
Angle	0.041	0.064	0.099	0.011
Single	0.137	0.152	0.183	0.117
Other	0.539	0.456	0.549	0.649
Single Vehicle run-off-road, Head-on, Sideswipe	0.114			

Table B.42: 2004 MR4ST Locally-Derived Collision Type

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Four-leg intersections with minor road stop control				
Head-on	0.005	0.009	0.014	0.000
Sideswipe	0.005	0.000	0.000	0.011
Rear-end	0.156	0.159	0.086	0.152
Angle	0.405	0.469	0.529	0.326
Single	0.054	0.018	0.014	0.098
Other	0.376	0.345	0.357	0.413
Single Vehicle run-off-road, Head-on, Sideswipe	0.059			

Table B.43: 2004 MR3ST and MR4ST Locally-Derived Values for Nighttime Crashes

Roadway Type	Locally-Derived Values		
	Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
	Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
3ST	0.515	0.485	0.151
4ST	0.553	0.447	0.174

Table B.44: 2005 MR3ST Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Three-leg intersections with minor road stop control				
Head-on	0.012	0.020	0.031	0.000
Sideswipe	0.006	0.010	0.000	0.000
Rear-end	0.193	0.192	0.109	0.189
Angle	0.064	0.121	0.125	0.014
Single	0.105	0.101	0.109	0.108
Other	0.620	0.556	0.625	0.689
Single Vehicle run-off-road, Head-on, Sideswipe	0.094			

Table B.45: 2005 MR4ST Locally-Derived Collision Type

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Four-leg intersections with minor road stop control				
Head-on	0.010	0.016	0.025	0.000
Sideswipe	0.010	0.000	0.000	0.024
Rear-end	0.124	0.128	0.074	0.119
Angle	0.411	0.440	0.457	0.369
Single	0.043	0.056	0.049	0.024
Other	0.402	0.360	0.395	0.464
Single Vehicle run-off-road, Head-on, Sideswipe	0.038			

Table B.46: 2005 MR3ST and MR4ST Locally-Derived Values for Nighttime Crashes

Roadway Type	Locally-Derived Values		
	Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
	Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
3ST	0.615	0.385	0.152
4ST	0.538	0.462	0.152

Table B.47: 2006 MR3ST Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Three-leg intersections with minor road stop control				
Head-on	0.000	0.000	0.000	0.000
Sideswipe	0.021	0.017	0.027	0.028
Rear-end	0.265	0.265	0.227	0.264
Angle	0.032	0.034	0.013	0.028
Single	0.111	0.094	0.093	0.139
Other	0.571	0.590	0.640	0.542
Single Vehicle run-off-road, Head-on, Sideswipe	0.090			

Table B.48: 2006 MR4ST Locally-Derived Collision Type

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Four-leg intersections with minor road stop control				
Head-on	0.000	0.000	0.000	0.000
Sideswipe	0.013	0.016	0.014	0.010
Rear-end	0.166	0.168	0.100	0.163
Angle	0.327	0.376	0.414	0.265
Single	0.067	0.080	0.100	0.051
Other	0.426	0.360	0.371	0.510
Single Vehicle run-off-road, Head-on, Sideswipe	0.058			

Table B.49: 2006 MR3ST and MR4ST Locally-Derived Values for Nighttime Crashes

Roadway Type	Locally-Derived Values		
	Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
	Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
3ST	0.600	0.400	0.132
4ST	0.710	0.290	0.164

Table B.50: 2004 to 2006 (Three Years) MR3ST Locally-Derived Crash Severity Values

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Three-leg intersections with minor road stop control				
Head-on	0.007	0.009	0.014	0.004
Sideswipe	0.010	0.009	0.010	0.013
Rear-end	0.245	0.264	0.167	0.217
Angle	0.045	0.070	0.076	0.017
Single	0.119	0.117	0.129	0.121
Other	0.573	0.531	0.605	0.629
Single Vehicle run-off-road, Head-on, Sideswipe	0.100			

Table B.51: 2004 to 2006 (Three Years) MR4ST Locally-Derived Collision Type

Collision Type	Locally-Derived Values			
	Total	Fatal and injury	Fatal and injury ^a	PDO
Four-leg intersections with minor road stop control				
Head-on	0.005	0.008	0.014	0.000
Sideswipe	0.009	0.006	0.005	0.015
Rear-end	0.149	0.152	0.086	0.146
Angle	0.380	0.427	0.466	0.318
Single	0.055	0.052	0.054	0.058
Other	0.402	0.355	0.376	0.464
Single Vehicle run-off-road, Head-on, Sideswipe	0.052			

Table B.52: 2004 to 2006 (Three Years) MR3ST and MR4ST Locally-Derived Values for Nighttime Crashes

Roadway Type	Locally-Derived Values		
	Proportion of total night-time crashes by severity level		Proportion of crashes that occur at night
	Fatal and injury, p_{inr}	PDO, p_{pnr}	p_{nr}
3ST	0.571	0.429	0.145
4ST	0.600	0.400	0.164

URBAN SEGMENTS LOCALLY-DERIVED VALUES

Table B.53: Distribution of Multiple-Vehicle Non-driveway Collisions for Roadway Segments by Manner of Collision Type (Urban)

Collision type	Locally-Derived Values									
	2U		3T		4U		4D		5T	
	FI	PDO	FI	PDO	FI	PDO	FI	PDO	FI	PDO
Rear-end collision	0.709	0.680	0.818	0.636	0.658	0.548	0.783	0.646	0.606	0.524
Head-on collision	0.029	0.009	0.016	0.004	0.029	0.004	0.006	0.000	0.018	0.011
Angle collision	0.013	0.049	0.000	0.025	0.015	0.016	0.019	0.008	0.020	0.015
Sideswipe, same direction	0.010	0.037	0.000	0.075	0.060	0.205	0.038	0.142	0.053	0.156
Sideswipe, opposite direction	0.039	0.020	0.000	0.014	0.022	0.008	0.013	0.004	0.005	0.004
Other multiple-vehicle collision	0.201	0.206	0.166	0.246	0.216	0.219	0.140	0.200	0.298	0.289

Table B.54: Distribution of Single-Vehicle Collisions for Roadway Segments by Collision Type (Urban)

Collision type	Locally-Derived Values									
	2U		3T		4U		4D		5T	
	FI	PDO	FI	PDO	FI	PDO	FI	PDO	FI	PDO
Collision with animal	0.027	0.170	0.040	0.214	0.037	0.100	0.000	0.077	0.005	0.095
Collision with fixed object	0.757	0.736	0.280	0.786	0.519	0.825	0.400	0.846	0.308	0.798
Collision with other object	0.000	0.038	0.040	0.000	0.000	0.075	0.000	0.000	0.005	0.036
Other single-vehicle collision	0.216	0.057	0.640	0.000	0.444	0.000	0.600	0.077	0.681	0.071

Table B.55: Crash Severity for Proportions for Multiple-Vehicle Driveway Related Collisions (Urban)

Driveway type (j)	Coefficients for specific roadway types				
	2U	3T	4U	4D	5T
Proportion of fatal-and-injury crashes (f_{dwy})					
All driveways	0.556	0.467	0.462	0.778	0.500
Proportion of property-damage-only crashes					
All driveways	0.444	0.533	0.538	0.222	0.500

Table B.56: Pedestrian Crash Adjustment for Roadway Segments (Urban)

Road type	Pedestrian Crash Adjustment Factor (f_{pedr})	
	Locally-Derived Values	
	Posted Speed 30 mph or Lower	Posted Speed Greater than 30 mph
2U	0.034	0.012
3T	0.020	0.014
4U	0.016	0.004
4D	0.048	0.013
5T	0.010	0.021

Table B.57: Bicycle Crash Adjustment Factor for Roadway Segments (Urban)

Road type	Bicycle Crash Adjustment Factor (fbiker)	
	Locally-Derived Values	
	Posted Speed 30 mph or Lower	Posted Speed Greater than 30 mph
2U	0.007	0.003
3T	0.016	0.010
4U	0.010	0.010
4D	0.024	0.009
5T	0.017	0.020

Table B.58: Nighttime Crash Proportions for Unlighted Roadway Segments (Urban)

Road Type	Proportion of Total Nighttime Crashes by Severity Level		Proportion of Crashes that Occur at Night
	Fatal and Injury (p _{inr})	PDO (p _{pnr})	(p _{nr})
2U	0.606	0.394	0.215
3T	0.286	0.714	0.118
4U	0.385	0.615	0.234
4D	0.800	0.200	0.225
5T	0.474	0.526	0.228

URBAN INTERSECTIONS LOCALLY-DERIVED VALUES

Table B.59: Distribution of Multiple-Vehicle Collisions for Intersections by Collision Type (Urban)

Collision type	Locally-Derived Values							
	3ST		3SG		4ST		4SG	
	FI	PDO	FI	PDO	FI	PDO	FI	PDO
Rear-end collision	0.186	0.181	0.580	0.530	0.165	0.135	0.501	0.402
Head-on collision	0.004	0.000	0.005	0.000	0.000	0.000	0.002	0.000
Angle collision	0.078	0.056	0.060	0.055	0.449	0.399	0.236	0.215
Sideswipe	0.008	0.016	0.011	0.013	0.000	0.007	0.004	0.012
Other multiple-vehicle collision	0.725	0.746	0.343	0.402	0.386	0.459	0.257	0.370

Table B.60: Distribution of Single-Vehicle Crashes for Intersections by Collision Type (Urban)

Collision type	Locally-Derived Values							
	3ST		3SG		4ST		4SG	
	FI	PDO	FI	PDO	FI	PDO	FI	PDO
Collision with parked vehicle	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Collision with animal	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Collision with fixed object	0.077	1.000	0.115	0.875	0.138	0.750	0.097	0.722
Collision with other object	0.000	0.000	0.000	0.125	0.000	0.000	0.000	0.000
Other single-vehicle collision	0.923	0.000	0.769	0.000	0.862	0.000	0.888	0.056
Noncollision	0.000	0.000	0.115	0.000	0.000	0.250	0.015	0.222

Table B.61: Factors for Equation 12-17 (Urban)

Intersection Type	Proportion of Single Vehicle Crashes that are Fatal and Injury (f_{bisv})
	Locally-Derived Values
3ST	0.900
4ST	0.880

Table B.62: Pedestrian Crash Adjustment Factors for Stop-Controlled Intersections (Urban)

Intersection Type	Proportion of Total Crashes that are Pedestrian Fatal and Injury Crashes (f_{pedi})
	Locally-Derived Values
3ST	0.025
4ST	0.016

Table B.63: Bicycle Crash Adjustment Factors for Intersections (Urban)

Intersection Type	Proportion of Total Crashes that are Bicycle Fatal and Injury Crashes (f_{bikeI})
Locally-Derived Values	
3ST	0.022
3SG	0.016
4ST	0.023
4SG	0.013

Table B.64: Nighttime Crash Proportions for Unlighted Intersections (Urban)

Intersection Type	Proportion of crashes that occur at night, p_{ni}
	Locally-Derived Values
3ST	0.321
4ST	0.311
3SG	0.160
4SG	0.122



P.O. Box 751
Portland, OR 97207

OTREC is dedicated to stimulating and conducting collaborative multi-disciplinary research on multi-modal surface transportation issues, educating a diverse array of current practitioners and future leaders in the transportation field, and encouraging implementation of relevant research results.