

Portland State University

PDXScholar

TREC Friday Seminar Series

Transportation Research and Education Center
(TREC)

2-16-2018

Road Diet V2.0 - Road Diet with Roundabouts

Michael Williams

Michael Williams Company

Follow this and additional works at: https://pdxscholar.library.pdx.edu/trec_seminar



Part of the [Transportation Commons](#), [Transportation Engineering Commons](#), and the [Urban Studies Commons](#)

Let us know how access to this document benefits you.

Recommended Citation

Williams, Michael, "Road Diet V2.0 - Road Diet with Roundabouts" (2018). *TREC Friday Seminar Series*. 142.

https://pdxscholar.library.pdx.edu/trec_seminar/142

This Book is brought to you for free and open access. It has been accepted for inclusion in TREC Friday Seminar Series by an authorized administrator of PDXScholar. Please contact us if we can make this document more accessible: pdxscholar@pdx.edu.

TREC Presentation

Friday February 16, 2018
Portland State University

ROAD DIET V2.0

MICHAEL WILLIAMS

EDUCATION

B.S. Computer Science M.S. Electrical Engineering M.S. Civil Engineering

EXPERIENCE

R&D – Biomedical Engineering
Public Works General Contracting
Active Transportation


INTERESTS

Safe Streets Road Diets Roundabouts Advisory Bike Lanes

CONTACT INFO

www.advisorybikelanes.com @bikepedx bikepedx@gmail.com

STANDARD ROAD DIET

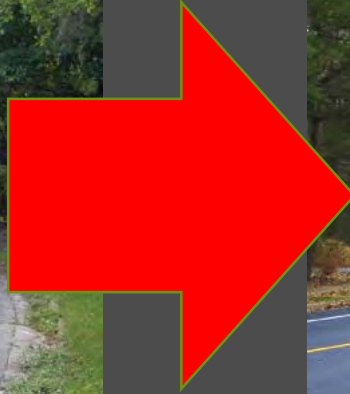

The re-configuration of pavement markings to transform a 4-lane, undivided road (two through lanes in each direction) to a 3-lane road (one through lane in each direction separated by a two way left turn lane or TWLTL).

STANDARD ROAD DIET


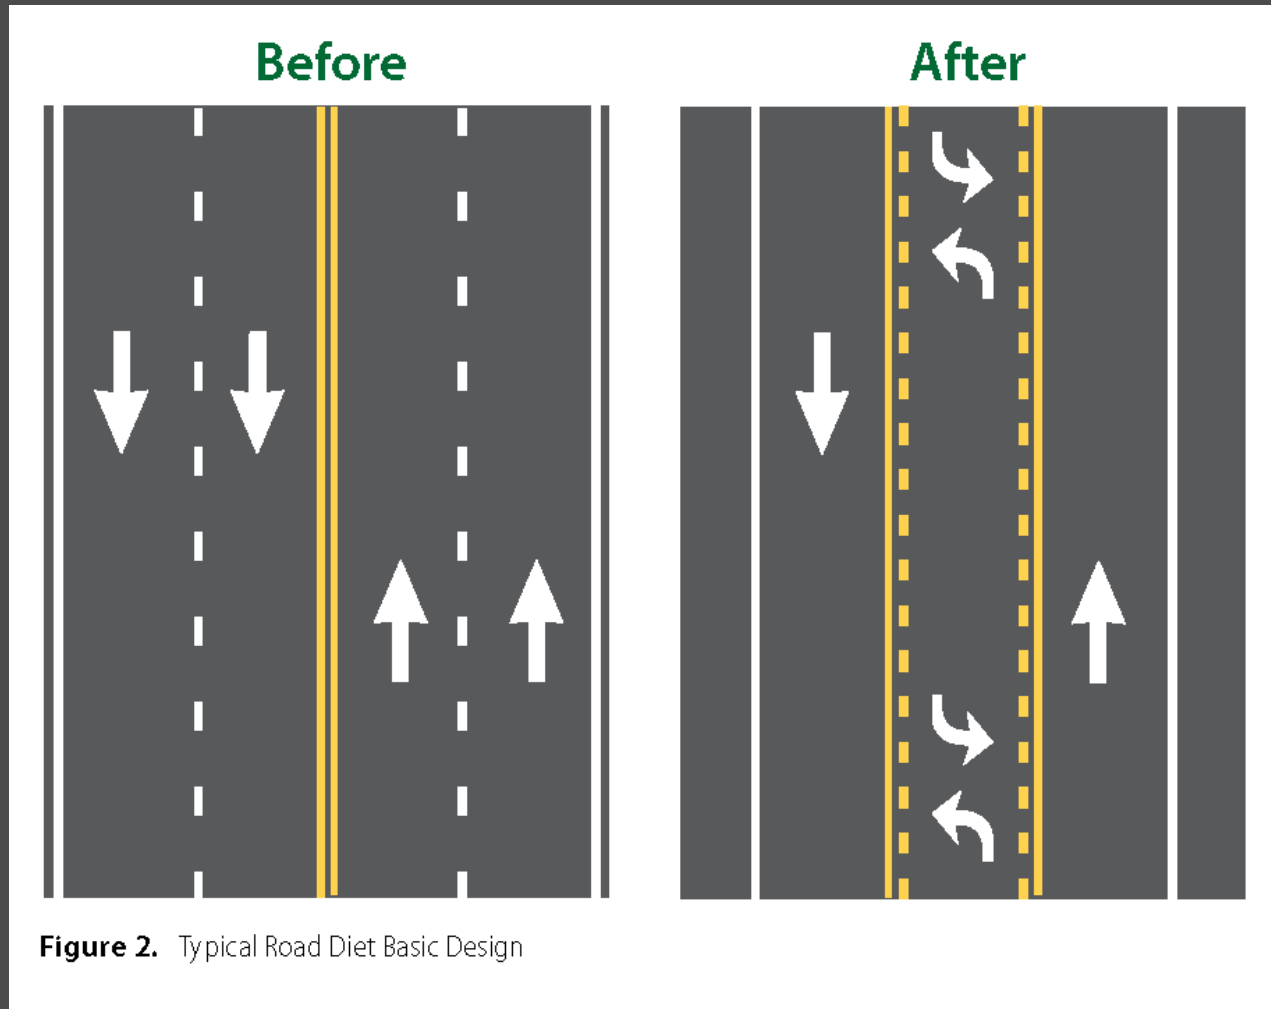


Figure 2. Typical Road Diet Basic Design

STANDARD ROAD DIET

ADVANTAGES/APPLICABILITY

- Applicable to corridors with up to 25,000 ADT
- Little capacity reduction on de-facto corridors
- Increased safety for all users
- Liberated ROW
- Livability

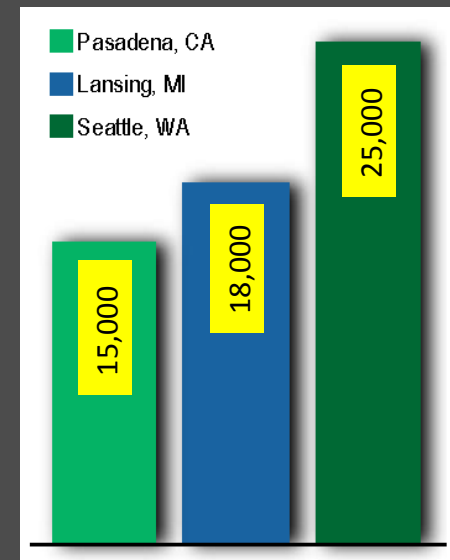

Maximum Volume for Road Diet (ADT)

STANDARD ROAD DIET

DISADVANTAGES/INAPPLICABILITY

- Short blocks, Signal timing, intersection capacity
- Capacity reduction on through corridors
- TWLTL and intersection safety
- Liberated ROW can be minimal
- Higher ADT corridors

STANDARD ROAD DIET

CAN WE GO ONE STEP, OR ONE LANE, FARTHER?

ROAD DIET V2.0

- No new elements
- Successful projects exist in the U.S.
- Guidance and acceptance lacking

ROAD DIET V2.0

CORRIDOR CHARACTERISTICS

- Roundabouts at all (major) intersections
- Two-lane road, one lane in each direction
- No left turns – U-turn followed by right turn
- Raised median

We discuss only

- Single-lane roundabouts
- 2-lane roads



Photo Courtesy roundabouts.net

ROAD DIET V2.0

ADVANTAGES

- Potentially dramatic safety impacts for all
- Liberated ROW
- Go slower, get there faster
- Reduced speed – livability, place-making, commerce
- Short blocks, signal timing – no problem!

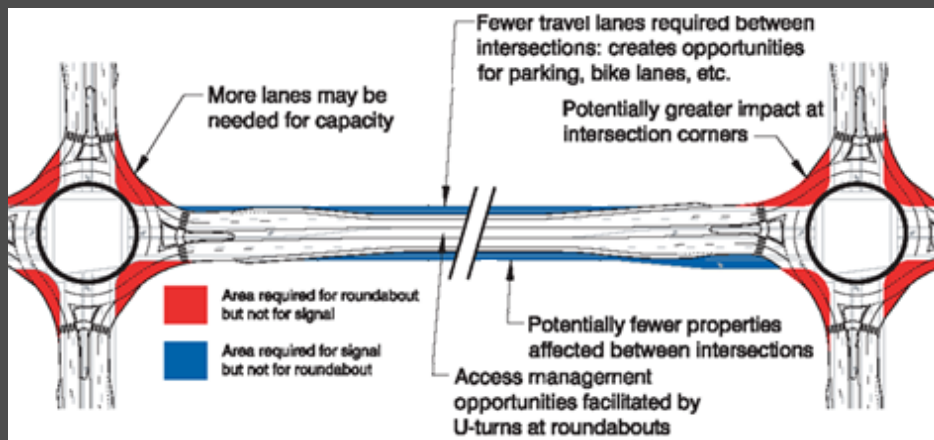


Diagram from 2010 NCHRP 672
Roundabouts: An Informational
Guide

ROAD DIET V2.0

DISADVANTAGES/ISSUES

- Larger vehicles in constrained roundabouts
- Emergency vehicles, public buses
- Capacity dependent on left and U-turn rates
- Capacity dependent on familiarity with roundabouts
- Ability to pass – transit, freight
- Corridor friction



Photo Courtesy of Blue Zones

ROAD DIET V2.0

- No Accessible Guidance
- No Feasibility Process
- Need RDIG Counterpart

Road Diet Informational Guide



FHWA Safety Program



U.S. Department of Transportation
Federal Highway Administration



www.safety.fhwa.dot.gov

ROAD DIET V2.0 INFORMATIONAL GUIDE

Mirrors the FHWA Road Diet Informational Guide

- Definition
- Benefits
- Tradeoffs
- Determination of Feasibility
- Design Issues
- Assessment

ROAD DIET V2.0

FEASIBILITY ASSESSMENT

How does an agency know if RD2.0 is worth pursuing?

TWO QUESTIONS

1. ROW for Roundabouts?
2. Supportable Traffic Volumes?

ROAD DIET V2.0

1. ROW FOR ROUNDABOUTS?

Roundabouts per 2000 FHWA Roundabouts Informational Guide

- Urban Compact
80-100 foot ICD 15,000 veh/day on all 4 legs
- Urban Single-lane
100-130 foot ICD 20,000 veh/day on all 4 legs

Procedure for Selecting Roundabout Template

- Measure a number of examples of each, calculate mean diameter
- Include sidewalk and landscaping – true size, not ICD
- No roundabouts had separated bicycle facilities to include

ROAD DIET V2.0

2. SUPPORTABLE TRAFFIC VOLUMES?

CONSIDERED APPROACHES FOR VOLUME ESTIMATION

1. Simulation
Resource intensive, well-targeted solution but difficult to generalize
2. Formulaic Estimation using HCM Models
Rbt capacity formulas don't consider corridors or familiar drivers
3. On-the-Ground Data
Extrapolate from rbt corridor traffic data (LOS D or E)

Because good data was available, #3 was chosen.

ROAD DIET V2.0

DATA

NCHRP 772 Evaluating the Performance of Corridors with Roundabouts (2014)

From set of roundabout corridors in U.S., chose those with:

- ≥ 3 roundabouts in series,
- 2-lane segments (no left turn lanes),
- Single lane roundabouts only, and
- Didn't include a pair of roundabouts servicing a highway interchange.

Six Corridors

- La Jolla Blvd, San Diego, CA
- Hagen Ranch Rd, Boynton Beach, FL
- Maple Island Rd, Springfield, OR
- O'Neill Dr, San Juan Capistrano, CA
- W. 8th Ave, Chico, CA
- Via Bella St, Williamsport, PA

ROAD DIET V2.0

1. ROW FOR ROUNDABOUTS?

ROUNDABOUT CHARACTERISTICS							
Corridor Name	Roundabout	Diameter (Feet)	Width @ Crosswalk (Feet)	ICD Center to Crosswalk Center (Feet)	ICD* (Feet)	Distance from ICD edge to Crosswalk (Feet)	Roundabout Type per 2000 FHWA Guide
La Jolla Blvd	Camino De La Costa	105	54	88	92	42	Urban Compact
	Bird Rock Avenue	110	84	88	95	40.5	Urban Compact
O'Neill Dr	Eaton Place	170	97	93	136	25	Urban Single Lane+
	Senna Parkway	144	87	89	125	26.5	Urban Single Lane
W. 8th Ave	Greenwich Drive	105	48	75	98	26	Urban Compact
	Magnolia Avenue	115	71	70	97	21.5	Urban Compact
Hagen Ranch Rd	Majestic Palm Drive	175	81	117	145	44.5	Urban Single Lane+
	Le Chalet Boulevard	148	83	78	103	26.5	Urban Single Lane
Maple Island Rd	International Way	140	79	80	110	25	Urban Single Lane
	East Game Farm Road	138	68	79	111	23.5	Urban Single Lane
Via Bella	Court Street	156	68	97	133	30.5	Urban Single Lane+
	Mulberry Street	159	77	98	134	31	Urban Single Lane+
Average		138.8	74.8	87.7	114.9	30.2	
Median		142	78	88	110.5	26.5	
Maximum		175	97	117	145	44.5	
Minimum		105	48	70	92	21.5	

ROAD DIET V2.0

2. SUPPORTABLE TRAFFIC VOLUMES?

La Jolla Boulevard, San Diego, CA



Photo
Courtesy
of San
Diego
Union
Tribune

5-lane road

22,000 ADT at 40 – 45 MPH

segment of Hwy 101

Residents/Businesses demanded better and got it in 2008

Photo Courtesy of San Diego Union Tribune

ROAD DIET V2.0

2. SUPPORTABLE TRAFFIC VOLUMES?

La Jolla Boulevard, San Diego, CA



Photo
Courtesy
of San
Diego
Union
Tribune

Bike lanes

23,000 ADT at 15 - 25 MPH

77% noise reduction

35% increase in trade

90% decrease in fatalities

ROAD DIET V2.0

2. SUPPORTABLE TRAFFIC VOLUMES?

La Jolla Boulevard, San Diego, CA – Volume?

- Measured Volumes

23,000 ADT with no congestion complaints

Peak 15 min volume = 583 => 2,332 veh/hr

1,166 veh/hr single lane

- Simulation Volumes

NCHRP 772 reports City rep claims 27,000 ADT possible
in corridor simulations => 1,374 veh/hr single lane

*2007/2010 HCM rbt models peak at 1,130 veh/hr single lane!

ROAD DIET V2.0

2. SUPPORTABLE TRAFFIC VOLUMES?

But these volumes aren't possible per current models!

- Actual Peak Volume = 1,166 veh/hr
- Simulated Peak Volume = 1,374 veh/hr
- But 2010 HCM model peak volume = 1,130 veh/hr

ROAD DIET V2.0

2. SUPPORTABLE TRAFFIC VOLUMES?

High Volumes Possible Because

1. Low Left Turn & Minor Approach Volumes (7 - 10%)
2. Familiarity!

BUT DON'T FORGET!

- Volumes include friction from 62–118 pedestrians/hr and 13–30 cyclists/hr!
- Volumes include penalties for U-turn/Right turn and Left turn movements!
- Volumes include friction from on-street parking!

ROUNDBOUT THROUGHPUT MODELS

2000 ROUNDABOUTS INFORMATIONAL GUIDE

p. 86 “As performance data become available for roundabouts designed according to the procedures in this guide in the United States, they will provide a basis for development of operational performance procedures specifically calibrated for U.S. conditions.”

2007 NCHRP 572 ROUNDABOUTS IN THE U.S.

$C = 1130 * \exp(-0.0010 * V_c)$ where

C = entry capacity (veh/hr) and

V_c = circulating traffic flow (pcu/hr).

HCM 2000 model

ROUNDBOUT THROUGHPUT MODELS

2010 ROUNDABOUTS INFORMATIONAL GUIDE (672)

$C = 1130 * \exp(-0.0010 * V_c)$ where

C = entry capacity (pcu/hr) and

V_c = circulating traffic flow (pcu/hr).

2010 HCM

Throughput model includes 1,130 maximum capacity

2014 NCHRP 772 ROUNDABOUT CORRIDORS

- Acknowledges shortcomings in current capacity guidance
- First work to model roundabout corridor capacity using Roundabout Influence Area Model
- First geometric delay model for U.S. based on RIA

ROUNDAABOUT THROUGHPUT MODELS

2015 FHWA-SA-15-070 Accelerating Roundabout Implementation in the United States, Volume II of VII, Assessment of Roundabout Capacity Models for the Highway Capacity Manual.

- Acknowledges that the HCM 2010 models underestimate roundabout capacities.
- Recommends a new function for capacity of a single lane roundabout with a maximum of 1380 vehicles per hour.

ROAD DIET V2.0

ROW AND VOLUMES

	Turning & Minor Street Traffic Percentage	
	< 10% Left/U-Turn/Minor Traffic	> 10% Left & U-Turn/Minor Traffic
Desired Throughput		
Up to 25,000 veh/day	110' (Urban Compact)	140' (Urban Single-Lane)
Up to 30,000 veh/day	140' (Urban Single-Lane)	Data Not Available

Note: Separated bike facilities are not included in these diameter measurements.

ROAD DIET V2.0



Edsel & Vitasovich Mini-Roundabout in New Zealand
~80' ICD, ~ 30,000 ADT with minimal queueing

ROAD DIET V2.0 INFORMATIONAL GUIDE

Road Diet



Plus

Michael Williams
June 10, 2017

www.advisorybikelanes.com/road-diet.html

CONCLUSION

THANK YOU!

QUESTIONS?

@bikepedx
bikepedx@gmail.com
www.advisorybikelanes.com