

Portland State University

PDXScholar

---

Civil and Environmental Engineering Faculty  
Publications and Presentations

Civil and Environmental Engineering

---

1-2015

## A Level-of-Service Model for Protected Bike Lanes

Nick Foster

Christopher Monsere

Portland State University, [monsere@pdx.edu](mailto:monsere@pdx.edu)

Jennifer Dill

Portland State University, [jdill@pdx.edu](mailto:jdill@pdx.edu)

Kelly Clifton

Portland State University, [kclifton@pdx.edu](mailto:kclifton@pdx.edu)

Follow this and additional works at: [https://pdxscholar.library.pdx.edu/cengin\\_fac](https://pdxscholar.library.pdx.edu/cengin_fac)



Part of the [Civil Engineering Commons](#), [Environmental Engineering Commons](#), [Transportation Commons](#), and the [Urban Studies Commons](#)

Let us know how access to this document benefits you.

---

### Citation Details

Foster, Nick; Monsere, Christopher; Dill, Jennifer; and Clifton, Kelly, "A Level-of-Service Model for Protected Bike Lanes" (2015). *Civil and Environmental Engineering Faculty Publications and Presentations*. 304. [https://pdxscholar.library.pdx.edu/cengin\\_fac/304](https://pdxscholar.library.pdx.edu/cengin_fac/304)

This Presentation is brought to you for free and open access. It has been accepted for inclusion in Civil and Environmental Engineering Faculty Publications and Presentations by an authorized administrator of PDXScholar. Please contact us if we can make this document more accessible: [pdxscholar@pdx.edu](mailto:pdxscholar@pdx.edu).

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51

# **A Level-of-Service Model for Protected Bike Lanes**

Paper#15-0349

Nick Foster (corresponding author)  
Kittelson & Associates, Inc.  
101 S Capitol Boulevard, Suite 301  
Boise, ID 83702  
Email: [nfoster@kittelson.com](mailto:nfoster@kittelson.com)  
Phone: 208-338-2683  
Fax: 208-338-2685

Christopher M. Monsere  
Department of Civil and Environmental Engineering  
Portland State University  
P.O. Box 751  
Portland, OR 97207-0751  
Email: [monsere@pdx.edu](mailto:monsere@pdx.edu)  
Phone: 503-725-9746  
Fax: 503-725-5950

Jennifer Dill  
Nohad A. Toulon School of Urban Studies and Planning  
Portland State University  
P.O. Box 751  
Portland, OR 97207-0751  
Email : [jdill@pdx.edu](mailto:jdill@pdx.edu)  
Phone: 503-725-5173  
Fax: 503-725-8770

Kelly Clifton  
Department of Civil and Environmental Engineering  
Portland State University  
P.O. Box 751  
Portland, OR 97207-0751  
Email: [kclifton@pdx.edu](mailto:kclifton@pdx.edu)  
Phone: 503-725-2871  
Fax: 503-725-5950

Submitted for presentation and publication to the  
94th Annual Meeting of the Transportation Research Board  
January 11-15, 2015

Submitted August 1, 2014  
Revised and resubmitted November 15, 2014

7,604 words [5,604+ 4 Figures x 250 + 4 Tables x 250]

## 1 ABSTRACT

2 Several methods exist for quantifying the quality of service provided by a roadway from a bicyclist's perspective;  
3 however, many of these models do not consider physically protected bike lanes and, of those that do, none is based  
4 on empirical data from the US. This is problematic as engineers, planners, and elected officials are increasingly  
5 looking to objective performance measures to help guide transportation project design and funding prioritization  
6 decisions. This paper addresses this gap by presenting a cumulative logistic model to predict user comfort on  
7 protected bike lanes developed from data collected during in-person video surveys. The surveys were conducted in  
8 Portland, OR with video footage gathered in Chicago, IL, Portland, OR and San Francisco, CA. The model is for  
9 road segments only and not signalized intersections. It complements the *Highway Capacity Manual 2010* level-of-  
10 service methods by providing an analysis procedure for a facility type that is not currently included in the manual.  
11 The model indicates that the type of buffer, direction of travel (one-way vs. two-way), adjacent motor vehicle speed  
12 limit, and average daily motor vehicle volumes are all significant predictors of bicyclist comfort in protected bike  
13 lanes. The model predicts a mean value of 'A' or 'B' on an A (most comfortable) – F (least comfortable) scale for  
14 all protected bike lane clips used in the survey. Consistent with previous research findings, survey respondents  
15 report that protected bike lanes are generally more comfortable than other types of on-street infrastructure.

## 16 INTRODUCTION

17 Long popular in northern Europe, protected bike lanes (PBLs)—also known as “cycle tracks” or “separated bike  
18 lanes”—are seeing a surge of installations in the United States. Around 80 such facilities had been built by 2011,  
19 but another 61 protected bike lanes have been built since then, an increase of approximately 76% (1). One of the  
20 expected primary benefits of protected bike lanes is that they provide a higher level of comfort over a standard bike  
21 lane that is only delineated by an inches-wide painted stripe. Indeed, previous research has shown that people prefer  
22 bicycling facilities that are physically separated from traffic to standard bike lanes (2-7).

23 The most recent edition of the *Highway Capacity Manual* (HCM) contains analysis procedures for  
24 measuring the level-of-service (LOS), also referred to as quality of service, provided by an urban roadway to  
25 bicyclists (8). The method uses different design and operating features of the roadway segment (e.g. width, motor  
26 vehicle volumes and speeds) to assess an LOS grade of A (best) to F (worst). These procedures are used by planners  
27 and engineers to recommend how existing streets could be retrofitted or new streets designed to better serve people  
28 on bicycles (and other modes). However, the current HCM does not include methods that address protected bike  
29 lanes, only conventional striped bike lanes, shoulders, and shared streets. There are other methods for predicting  
30 comfort from a bicyclist's perspective that do consider protected bike lanes, but they are either based on expert  
31 opinion (9, 10) or on surveys in Denmark (11) and it is not clear if their results correspond to the actual perceptions  
32 of the American traveling public.

33 This paper fills in some of this gap by presenting the results of an experiment to predict user comfort on  
34 protected bike lanes using surveys conducted in the United States. The resulting model is for road segments only and  
35 not signalized intersections. Data were collected for model development using a procedure similar to the HCM (12)  
36 and Danish methods (11). The surveys were conducted in Portland, OR with video footage gathered in Chicago, IL,  
37 Portland, OR and San Francisco, CA. Video surveys have previously been shown to be an effective substitute for  
38 field surveys involving individuals actually riding on the study facilities (13). They also allow for a large group of  
39 individuals to view multiple locations that might otherwise be impossible to recreate in a field study. The model  
40 could be used to supplement the current HCM to consider a wider range of options for improving the environment  
41 for bicycling.

42 The remainder of this paper is organized as follows. The paper begins with a brief review of prior research  
43 related to measuring comfort for bicyclists. The following section describes the process for filming and selecting the  
44 clips and administering the surveys. The collected data on user comfort ratings are used to develop models to predict  
45 user comfort based on variables related to motor vehicle traffic, roadway characteristics, and facility characteristics.  
46 To partially validate the model, the model is applied and the results are compared to self-reported comfort levels of  
47 cyclists who were intercepted on protected bike lanes as part of another independent, but related, research effort. A  
48 simple example application is then presented. Finally, conclusions and limitations of the model are presented. A  
49 more detailed project summary and additional analysis can be found in the corresponding author's master's thesis  
50 (14).

## 1 PRIOR RESEARCH

2 Constructing protected bike lanes may be a means to attract more individuals to bicycle because they reduce the  
 3 perceived risk of bicycling. Several surveys have shown that people prefer bicycling facilities that are physically  
 4 separated from traffic to standard bike lanes (2-7). In a study of Danish residents, Jensen (15) found that 45% of the  
 5 respondents said that they felt “very safe” when bicycling on protected bike lanes, as opposed to about 30% for  
 6 standard bike lanes, and just over 10% for shared streets. This study also found an increase in bicycle and moped  
 7 (which also use the infrastructure) volumes of 18-20% on streets where protected bike lanes were constructed.  
 8 Finally, a study of protected bike lanes in Washington, D.C. found that bicycle volumes increased by over 200%  
 9 during the p.m. peak hour after the installation of the lanes and that surveyed bicyclists generally reported feeling  
 10 more comfortable riding in the lanes than they had riding on the street before (16).

11 Researchers and practitioners have developed a number of quality-of-service (QOS) models for bicyclists  
 12 (8-12, 17-28). The six most relevant methods are summarized in Table 1. Of these, four use regression-based models  
 13 using an ‘A’ – ‘F’ scale and two employ categorical indices producing final numeric scores. Most of the regression-  
 14 based models used ordinary least squares (OLS), though one used logistic regression. Only the Danish LOS and the  
 15 Level of Traffic Stress approaches consider protected bike lanes, and, of those two, only the Danish model is based  
 16 on empirical data. The US models were developed with inputs from 150-200 participants and the Danish model  
 17 includes results from over 400 participants.

**TABLE 1 Summary of Select Bicycle QOS Methods**

Method	Form	# of Participants	# of Study Sites <sup>1</sup>	Considers Protected Bike Lanes?
Highway Capacity Manual 2010 LOS (12)	OLS Regression	145	30	No
Danish LOS (11)	Logistic Regression	407	56	Yes
Florida Department of Transportation LOS (20-22)	OLS Regression	60-150 <sup>2</sup>	21-30 <sup>2</sup>	No
FHWA Bicycle Compatibility Index (24)	OLS Regression	202	78	No
Level of Traffic Stress (9)	Index	Not based on observational data		Yes
San Francisco Bicycle Environmental Quality Index (10)	Index	Not based on observational data		Partially

<sup>1</sup>Not all sites shown at each viewing

<sup>2</sup>Includes multiple studies

## 18 Data Collection

19 Most of the methods are based on participant surveys completed after watching videos. Frequently this involves  
 20 recording video of different routes and/or intersections and showing them to participants in some type of controlled  
 21 environment (e.g. a room with a projector, screen, and speakers) (3, 11, 12, 13, 19, 23, 24, 25) or via an internet  
 22 survey (27). These videos are usually filmed from a moving bicycle (3, 11, 12, 13, 19, 23, 25), but they may also be  
 23 recorded on a camera in a car (27) or a stationary camera (24). Field surveys, where individuals ride and then rate  
 24 each segment or intercept surveys are also used. While field rides provide complete immersion for the participants,  
 25 video surveys are often preferred to avoid the potential risks that come with placing individuals in potentially  
 26 dangerous conditions (12, 13, 24) and because of the opportunity to control the conditions experienced by all  
 27 participants (24).

## 1 **Factors Considered**

2 The most commonly considered factors include speeds of adjacent motor vehicles (8-11, 17-22, 24, 28), the width of  
3 the space available for bicyclists (e.g. bike lane width, shared lane width) (8-11, 18-22, 24, 25, 27), the type of  
4 facility available (8-11, 18, 19, 24, 26), and motor vehicle volumes (8, 10, 11, 17-22, 24). The width of the outside  
5 motor vehicle lane is also sometimes included (8, 11, 17, 22, 24).

## 6 **User Demographic Influences on Comfort Perceptions**

7 User demographics are typically not included in predictive LOS models, though research often finds correlations  
8 between comfort level and some personal characteristics. Jensen (11) found no significant correlation between  
9 demographics and scores; though his study did observe that men and younger individuals generally felt more  
10 comfortable. Tilahun, et al. (3) found that gender and age produced similar trends in their utility model but were not  
11 significant predictors at the 95% confidence level. However, Petritsch, et al. (13) found age and gender to both be  
12 significant predictors in their work to develop the Florida Department of Transportation (FDOT) LOS model (again  
13 with men and younger individuals providing more comfortable ratings). The studies have produced more definitive  
14 results in terms of the impact that bicycling experience has on comfort ratings, finding that that more experienced  
15 riders are typically more comfortable than less experienced riders at a significant level (17, 22, 24). Dowling et. al  
16 (12) also found statistically significant differences in their results based on the metro area the survey took place in;  
17 however, Harkey, et. al. (24) found no difference in scores among the three metro areas they surveyed.

## 18 **METHODOLOGY**

19 This research employed a video survey approach to data collection. As suggested in the literature, it is preferred to  
20 field rides because it is more efficient and allows people to rate conditions not found locally and has been found to  
21 produce comparable results to field rides (13). The resulting model produced by the data is verified with intercept  
22 survey responses from a different project studying protected bike lanes (29).

### 23 **Video Collection and Production**

24 High-definition video was taken while biking along each study site using a GoPro® Hero 3 camera at eye level  
25 mounted to a bike's handlebars using a metal post. Audio was recorded by using an external stereo microphone with  
26 a windscreen. The author rode each study route at a speed of 10-14 miles-per-hour (MPH) while filming, which is  
27 about the speed of an average bicyclist (30) and comparable to previous efforts (11, 12, 25, 27).

28 One of the challenges to using a fixed-metal pole for the camera mount is that it doesn't dampen road  
29 vibration well. To mitigate this effect, each of the chosen clips was post-processed to smooth the bumpiness of the  
30 video using iMovie 2009. This program is effective at smoothing slight bumps; however the roughness of the  
31 pavement still shows on clips from routes with significant cracking or otherwise rough surfaces. After the fact, it  
32 was discovered that selecting a lower frame rate for filming would have improved the ability of the program to  
33 smooth the video clips.

### 34 **Site Selection**

35 Two general groups of sites were selected for this project: protected bike lanes to be used for model development  
36 and sites of more common infrastructure types (e.g. standard bike lanes, shared streets, and off-street paths) to be  
37 used for comparison (reference) purposes. The primary goal in selecting protected bike lane sites was to include a  
38 variety of different buffer types and have both one-way and two-way facilities represented. Candidate sites were  
39 limited to those present in cities being traveled to for a separate project (i.e. Chicago, Portland, and San Francisco).  
40 Reference sites were chosen to determine how individuals would perceive their comfort biking on protected bike  
41 lanes as compared to more common situations.

42 An initial list of 20 clips ranging from 21 to 30 seconds in length was selected for showing, for a total video  
43 running time of less than 15 minutes. The project team determined after the first survey that three of the clips were  
44 providing redundant information about user comfort and they were replaced by three other clips to provide a greater  
45 variety of facilities.

46 The selected clips cover a range of facility types, as shown in Figure 1. Some of the clips are taken from the  
47 same, or similar, location on a given street in order to determine if the number of motor vehicles passing the

1 bicyclist in the adjacent motor vehicle lane influences participant ratings. Average daily traffic (ADT) volumes for  
2 each facility are from official City or State counts.



1-Way PBL, Planters, 25 MPH, 9,960 ADT



2-Way PBL, Parked Cars, 25 MPH, 7,800 ADT



Shared Street, 30 MPH, 2,900 ADT



1-Way PBL, Parked Cars, 25 MPH, 12,800ADT



2-Way PBL, Parked Cars, 25 MPH, 15,900ADT



Bike Lane, 35 MPH, 15,170 ADT



1-Way PBL, Posts, 30 MPH, 28,160ADT



1-Way PBL, Parked Cars, 30 MPH, 9,150 ADT



Bike Lane, 25 MPH, 8,050 ADT



1-Way PBL, Posts, 25 MPH, 11,810ADT



1-Way PBL, Posts, 30 MPH, 9,150 ADT



Off-Street Path



1-Way PBL, Raised w/ Parking, 35 MPH, 4,380 ADT



Buffered Bike Lane, 35 MPH, 15,170ADT



Bike Boulevard, 25 MPH, 740 ADT

3

**FIGURE 1 Screenshots and Select Characteristics of Survey Clips**

## 1 **Survey Administration**

2 The survey instrument was designed to make it comparable to previous methods, to be simple and easy to  
3 understand, and to collect enough demographic information to examine potential biases in the sample. Respondents  
4 were asked to rate each clip on a scale from ‘A’ (extremely comfortable) to ‘F’ (extremely uncomfortable). The ‘A’  
5 through ‘F’ scale is intuitively understood by most people and is comparable to the six point scales used in the *HCM*  
6 *2010* and Danish LOS methods (8, 11). Participants are also asked to provide basic demographic information.

7 The survey was administered in-person three times. The first two surveys took place during the weekly  
8 Portland Farmer’s Market located at the Portland State University (PSU) campus on November 16 and 23, 2013.  
9 There are several farmer’s markets in the Portland area, but the one held at PSU is the largest. It was chosen as a  
10 location for the survey because it attracts a wide range of people, in terms of age, gender, and bicycling habits.  
11 Given that it was late in the season, so most other regional markets had closed, and one of the weekends was before  
12 Thanksgiving, it was expected that the market would be drawing from around the region and not just inner Portland.

13 The survey itself was conducted in a room in the PSU student union building, set-up with a projector,  
14 screen and external sound system. Lights were turned off in the room and the audio was turned up to a volume that  
15 represented actual traffic conditions. The clips were played on a continuous loop with the clip number appearing  
16 before each one started, so participants were instructed to find the first clip number that appeared after they entered  
17 the room on their grading sheet and begin from there, continuing until they came back to where they started. The  
18 room was set up so that individuals walking in and out of the room were out of the view of the seated participants.  
19 Eight-seconds of grading time were provided after each clip. Participants were recruited through signs placed  
20 outside of the entrance to the student union where the Farmer’s Market was taking place that advertised the survey.  
21 Participants were offered a \$5 token to be spent at the Farmer’s Market in exchange for their participation in the  
22 survey.

23 The third and final in-person survey took place at the Oregon Museum of Science and Industry (OMSI) on  
24 December 4, 2013. The survey coincided with the monthly OMSI After Dark event, in which the museum is only  
25 open to those age 21 years or older. This event was chosen because it eliminated the difficulty of trying to recruit  
26 participants with children and because it is popular, drawing hundreds of guests from around the area. The set-up  
27 and process at OMSI was similar to the farmer’s market.

## 28 **Validation Survey Data**

29 A separate project the authors were involved in collected comfort ratings from individuals who have ridden on  
30 different protected bicycle facilities (29). Data from these surveys (labeled here the “intercept survey”) are used to  
31 validate the model developed using the video-based survey data. Over, 3,230 individuals bicycling on protected bike  
32 lanes in Austin, TX; Washington, DC; San Francisco, CA; Portland, OR; and Chicago, IL completed a survey about  
33 their experience with the protected bike lane they were riding on after being handed a postcard with a link to the  
34 online survey.

35 Although the respondents rated their comfort on the protected bike lane in a similar fashion to those who  
36 watched the videos, the results from intercept survey are not necessarily directly comparable to the results from this  
37 video survey. In particular, the intercept survey questions cover the entire length of the facility that the respondent  
38 has ridden, encapsulating signalized intersections and changing conditions (i.e. different buffer types facility),  
39 whereas the video survey did not include any signalized intersections and the clips show only uniform sections.  
40 Also, the intercept survey only includes individuals who currently ride on the facility, so it does not capture  
41 individuals who do not currently bicycle.

## 42 **RESULTS**

### 43 **Participants**

44 A total of 221 individuals participated in the survey (146 at the market and 75 at OMSI). The resulting sample  
45 provides a wide range of participants in terms of age, gender, and bicycle riding experience. Table 2 summarizes the  
46 demographics of participants. The sample generally represents a wide range of individuals, comparable to, or more  
47 diverse than, previous studies. However, it skews toward younger persons and those who bicycle more frequently  
48 than the general population, despite the efforts to recruit broadly.

**TABLE 2 Participant Demographics**

Demographic Characteristic	Summary
Age	18-89 years; Mean = 36 years; Interquartile Range = 27-44 years
Gender	Female = 52% (n=115)
Riding Frequency	6+/week = 6% (n=14) 3-5x/week = 20% (n=44) 1-2x/week = 16% (n=35) 1-2x/month = 34% (n=75) Never = 23% (n=50) No Response = 1% (n=3)
Access to a Working Bicycle	Yes = 79% (n=175)
Would Like to Bicycle More Often	88% Strongly/Somewhat Agree (n=194)


1 *Demographic Influences on Scores*

2 Correlations between scores and demographics were analyzed in order to determine what types of biases may exist  
 3 within the sample. Age ( $R=0.06$ ,  $p=0.01$ ) and riding habits ( $R=-0.10$ ,  $p<0.01$ ) are weakly correlated with the scores  
 4 of individual clips, with scores tending to worsen as age increases and improve as riding frequency increases.  
 5 Gender ( $R=0.03$ ,  $p=0.11$ ) is not significantly correlated with the score for individual clips, indicating there is no  
 6 statistical difference in the ratings provided by men compared to women.

7 **Mean Comfort Score by Facility Type**

8 Figure 2 shows the mean score by facility type for all video clips. The relative preference for different facility types  
 9 is mostly consistent with previous route preference research (3, 4, 30). The exception to this is that the bike lane  
 10 with parking facility type is ranked higher than the two-way protected bike lane and the bike boulevard (a low-  
 11 volume shared-use street with traffic calming and diversion features and signage and markings to promote bicycle  
 12 use - see Figure 1). This is possibly a function of only one clip representing a bike lane with parking and it is on a  
 13 residential collector with a 25 MPH speed limit. Also, the ratings for the bike boulevard clip have the largest  
 14 standard deviation in the study, indicating a wide range of comfort with the facility shown in this clip, and the  
 15 median score for the bike boulevard is the same, 'B,' as the bike lane with parking clip and most of the two-way  
 16 protected bike lane clips.



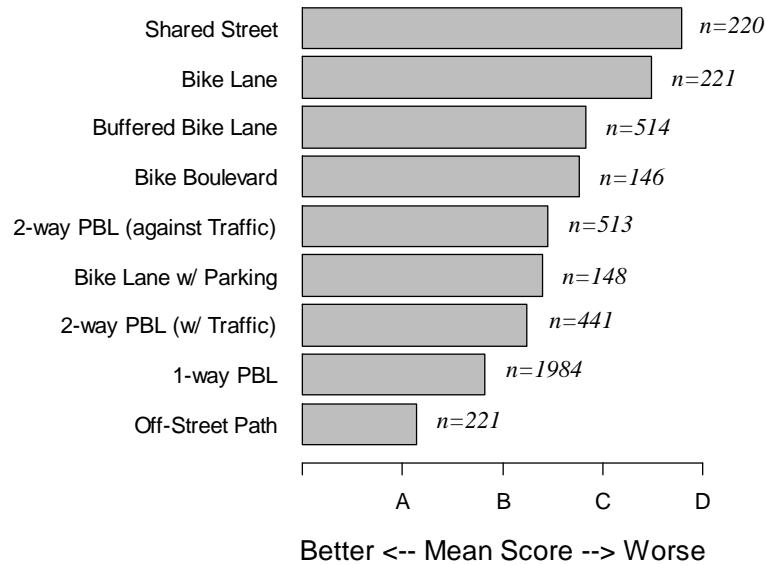

**FIGURE 2 Mean Score by Facility Type**

An ANOVA test reveals that on the whole, the difference in mean scores by facility type is significant ( $p < 0.01$ ). A Tukey post-hoc analysis of the ANOVA shows that most facility types are significantly different from each other at 95% confidence level. There are a few exceptions, notably for protected bike lanes that the difference in scores for riding against or with motor vehicle traffic on a two-way facility is not significant. This indicates that contraflow riding may not significantly influence comfort on a two-way protected bike lane.

### Protected Bike Lane Characteristics

The median score for all protected bike lane clips is either 'A' or 'B.' A Tukey post-hoc analysis of an ANOVA of buffer type and score reveals that most buffer types are significantly different from each other at the 95% confidence level. The exceptions to this are raised/parking and parked cars and raised/parking and posts. There is only one clip that has a raised facility, so the sample size is small.

Pearson correlations are estimated for a number of other variables to determine how well they might predict changes in rider comfort. These variables include motor vehicle volume and speed, unsignalized conflict density, number of travel lanes, and buffer width. On their own, all of the variables are weakly correlated with comfort ratings. The low correlation values do not necessarily mean these variables are not important for predicting bicyclist comfort. Instead, they indicate that the relationship between these characteristics and comfort may be complex with some level of interdependency between variables.

### Model Development

A series of cumulative logistic models (CLM) are developed. Logistic regression is preferred to OLS regression because the residuals from ordered response data are often non-normally distributed, which violates one of the assumptions of OLS regression, and OLS regression can predict values outside the allowable range (i.e. one to six). The proportional odds assumption underlying the CLM model has been approximately met in the dataset. The CLM model predicts the probability that a user will provide a given comfort score for a facility. This can also be interpreted as the percentage of the population that would view the facility at a given comfort rating. A single score for the facility can be determined based on when the cumulative probability reaches a certain threshold or a weighted average of the predicted distribution. Jensen (11) recommends reporting the median value; however, this threshold can be modified to an agency's goals (e.g. if the desire is to have facilities that are comfortable for 75% of the population, then the threshold could be set to 75%).

Table 3 summarizes the range of variables included in the survey that could be used to estimate the models. Other variables were considered but excluded from the model after exploration. These include facility width, pavement condition, and the density of unsignalized conflicts (e.g. driveways). There is not enough variation in the

1 facility width of the sample protected bike lanes to include this variable in the model. Pavement condition is  
 2 commonly used in other models; however it is also sometimes excluded because it is not readily available data and  
 3 not under the control of designers (11, 27). For these latter reasons, it is also excluded here. Unsignalized conflict  
 4 density is not included in the final models because this information is not typically readily available and it can be  
 5 difficult to collect for a large study area. The range of the number of driveways on each segment is also limited.

**TABLE 3 Model Variable Summary**

<b>Factor</b>	<b>Number of Clips with Factor</b>	<b>Number of Unique Facilities with Factor</b>
Planter Buffer	3	1
Posts Buffer	3	3
Parked Cars Buffer	8	3
Raised w/ Parking Buffer	1	1
1-Way	10	6
2-Way	5	1
25 MPH MV Speed	9	3
30 MPH MV Speed	5	3
35 MPH MV Speed	1	1
2 Travel Lanes	11	6
3 Travel Lanes	4	2
Average Daily Traffic (ADT) Volume	Mean 12,160 St. Dev= (5,635), Range 4,380 – 28,160	

6

7 Three models are presented in Table 4. The first two, A and B, use only variables for which data are likely  
 8 to be readily available to practitioners:

9

- Buffer type

10

- Facility type (1-way vs. 2-way)

11

- Motor vehicle speed

12

- Number of motor vehicle travel lanes

13

- *ADT (as a substitute for number of motor vehicle travel lanes)*

14

15 These listed variables also have some of the highest Pearson correlation values with the comfort scores for  
 16 either all protected facilities or one-way protected facilities only. Further, the latter three variables are among the  
 17 most commonly included items in other models. The third model, C, is an exploratory model determined by the  
 18 statistical software package, R, using stepwise regression and drawing on a wider range of possible variables (31-  
 19 34). The purpose of Model C is to compare how a model that draws on a wider range of variables, some of which  
 may be difficult to gather, performs with respect to Models A and B, which are limited to the variables listed above.

20

21 All three models are statistically significant predictors of comfort rating at the 95% confidence level  
 22 ( $p < 0.01$  for all three compared to the null model using a chi-squared test). Model B has the lowest deviance and all  
 23 of its coefficients are significant predictors at the 95% confidence level. Model C produces inconsistent results as  
 24 compared to the other two models (i.e. the Parked Car buffer has a positive coefficient). Therefore, the discussion  
 25 below focuses on Model B. Note that because lower scores are better (A=1, F=6) the interpretation of the signs on  
 the coefficients are such that negative signs mean improved comfort scores.

**TABLE 4 Cumulative Logistic Regression Model Results**

<b>Variable<sup>1</sup></b>	<b>Model A Coefficient/(odds ratio)</b>	<b>Model B Coefficient/ (odds ratio)</b>	<b>Model C Coefficient/(odds ratio)</b>
Planter Buffer	-1.99/(0.14)**	-2.13/(0.12)**	-0.89/(0.41)*
Parked Car Buffer	-1.26/(0.28)**	-1.38/(0.25)**	0.87/(2.39)
Raised/ Parking <sup>2</sup> Buffer	-0.35/(0.70)	-0.70/(0.50)**	1.13/(3.09)
Two-Way Facility	1.24/(3.44)**	1.12/(3.08)**	0.93/(2.55)**
MV Speed	-0.01 (0.99)	n/a	n/a
# of MV Lanes	-0.30 (0.74)**	n/a	n/a
ADT (1,000 vehicles/day) * MV Speed	n/a	-0.001 (1.00)**	n/a
ln(MV Volume in Adjacent Lane (Veh/hr))	n/a	n/a	0.50/(1.65)**
ln(Buffer Width)	n/a	n/a	-0.13/(0.28)
MV Volume in Adjacent Lane (Veh/hr) * Buffer Width	n/a	n/a	0.09/(1.00)
Intercept: A-B	-2.05	-1.60	0.50
Intercept: B-C	-0.40	0.05	2.15
Intercept: C-D	1.09	1.53	3.65
Intercept: D-E	2.09	2.54	4.65
Intercept: E-F	3.15	3.60	5.71
Log Likelihood	-3,305	-3,230	-3,295

Note that because lower scores are better (A=1, F=6), negative signs on coefficients mean improved comfort scores.

<sup>1</sup>The reference facility has a posts buffer and is a one-way protected bike lane


<sup>2</sup>Parking is not expected to be occupied often

\*Significant at the 95% confidence level

\*\*Significant at the 99% confidence level

1 Interpretation of the model coefficients allows us to predict how changing one (or more) features of the  
2 protected lane would affect comfort levels. The baseline or “reference” facility is a one-way lane with flexposts in  
3 the buffer. For example, in Model B, changing the buffer from the baseline to a planter increases the odds of an  
4 individual rating a facility one grade better by approximately 730%  $((1/\text{odds ratio}) - 1)$ . Adding a mostly-occupied  
5 buffer of parked cars increases the odds 300%, and raising the lane slightly above the street grade with an  
6 unoccupied parking buffer increases the odds 100%. Conversely, the odds of an individual rating the facility one  
7 letter grade worse increase by about 208% if it is a two-way protected bike lane. A one unit change in ADT (1,000)  
8 multiplied by motor vehicle speed has minimal impact on the odds of an individual’s rating changing.

9 Model B is selected for further evaluation. Figure 3 compares the predicted distribution of responses for  
10 each protected bike lane clip from Model B to the observed distribution of responses from the video survey. As  
11 inspection of the figure reveals, the selected model predicts distributions that are relatively similar to what is  
12 observed in the video surveys. Although not shown, the model also correctly predicts the median score for all  
13 fourteen clips.

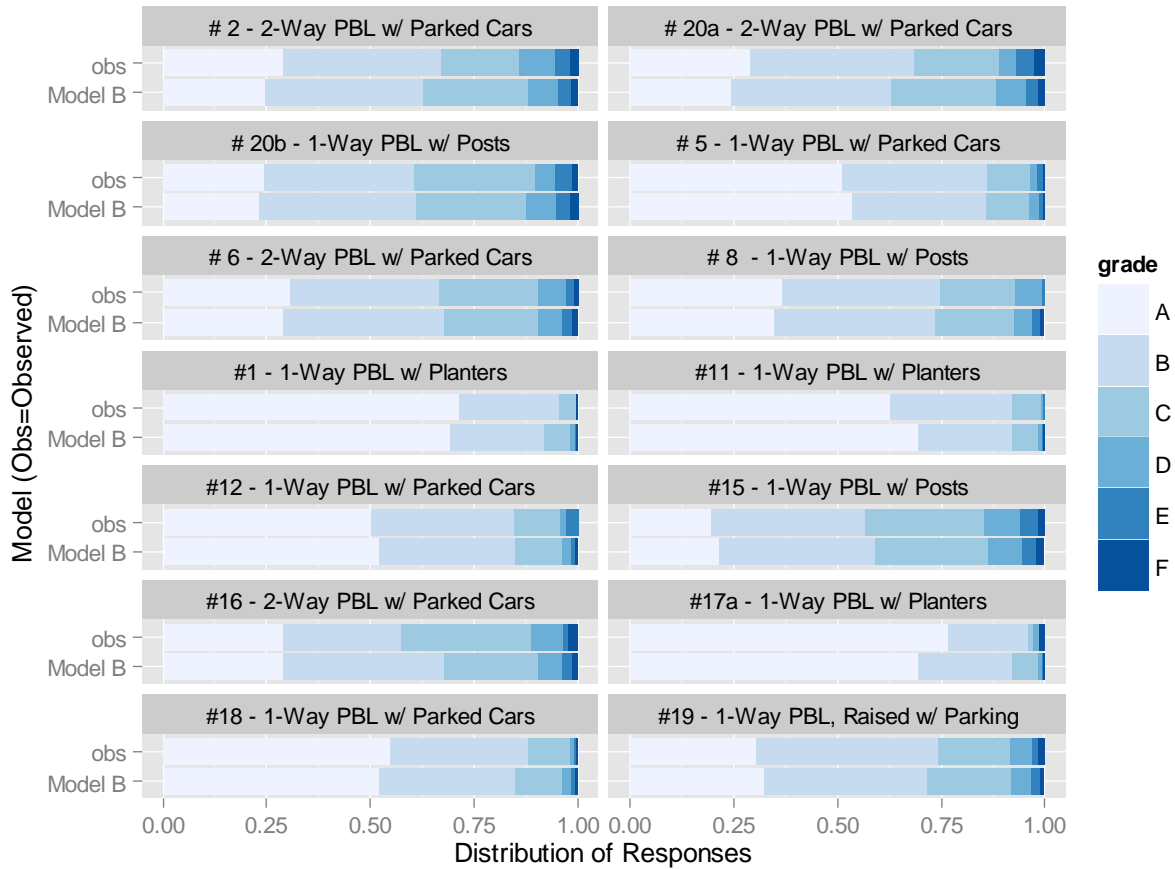


1

**FIGURE 3 Predicted vs. Observed Distributions**

2 *Model Validation*

3 The model was validated using the intercept survey described previously in the methodology section and the Danish  
 4 LOS model (11) for road segments. The results are shown in Figure 4. In the figure, “Obs” is the distribution of  
 5 responses from the intercept survey respondents, “Model B” is the results of applying Model B to the facilities the  
 6 bicyclists were intercepted on, and “Danish” is the results from applying the Danish LOS model for road segments  
 7 to the surveyed facilities. Note that there is also a Danish model for intersections, but it is not used here in order to  
 8 provide a direct comparison to Model B.

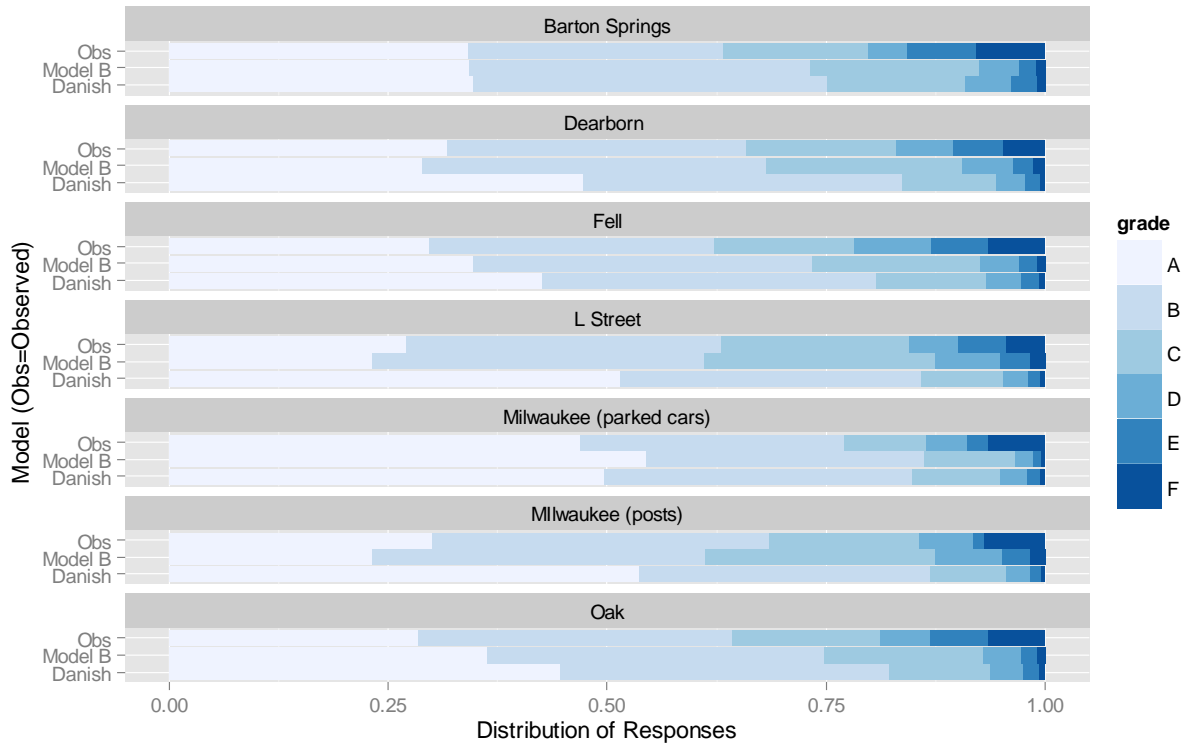

**FIGURE 4 Predicted vs. Observed Responses – Intercept Facilities**

Predictions from the two models generally approximate the frequencies observed in the surveys. While neither model includes signalized intersections, Model B generally tracks closer to the observed frequencies (especially for the ‘A’ and ‘B’ grades) than does the Danish model. As noted above, the intercept survey method covered the entire length of the protected lane, including signalized intersections, so it is not a perfect source for validation. Both models underestimate the ‘D’-‘E’-‘F’ scores which most likely indicates that a user’s perceived comfort on the entire facility is significantly affected by the experience at intersections.

It is important to note that while there is some overlap between the facilities in the validation attempt and model development, the models are applied to a few facilities that were not included in the model development. Barton Springs Road (Austin, Texas) and L Street (Washington, DC) are not included in the video survey. Neither is Oak Street (San Francisco, California), but it is similar to Fell Street, which is shown in the video survey, as they share similar designs and form a couplet. Milwaukee Avenue (Chicago, Illinois) is shown in the video surveys, but only with a posts buffer. Given that Model B predicts frequency distributions similar to what is shown from the surveys of these facilities, the model appears to be transferable to other facilities that are within the same ADT range (approximately 8,000 to 30,000 vehicles/day), same speed range (25-35 mph), and feature the same buffer types (i.e. parked cars, posts, or planters) as those included in the video survey. It may also be more applicable to American facilities than the Danish model, but further analysis using the Danish intersection model would be required to verify this.

**EXAMPLE APPLICATION**

To demonstrate the application of the model, a simple example is presented. A jurisdiction is considering adding a protected bike lane to a three-lane one-way street with an ADT of 11,000 vehicles per day that has on-street parking but no bike facilities. Using *HCM 2010* methodology, such a street would have a link LOS of ‘D’ for bicycling. Assuming sufficient width to remove a travel lane and replacing it with a one-way protected bike lane with a parked car buffer, application of the model would be as follows:

$$\text{Probability of an ‘A’ rating} = 1/(1+e^{(-1.60)-1.38-0.001*(30*11,000/1,000)}) = 0.53$$

$$p(B) = 1/(1+e^{(-0.05)-1.38-0.001*(30*11,000/1,000)}) - 0.53 = 0.32$$

$$1 \quad p(C) = 1/(1+e^{-(0.05)-1.38-0.001*(30*11,000/1,000)}) - (0.53 + 0.32) = 0.11$$

$$2 \quad p(D) = 1/(1+e^{-(2.54)-1.38-0.001*(30*11,000/1,000)}) - (0.53 + 0.32 + 0.11) = 0.03$$

$$3 \quad p(E) = 1/(1+e^{-(3.60)-1.38-0.001*(30*11,000/1,000)}) - (0.53 + 0.32 + 0.11 + .03) = 0.01$$

$$4 \quad p(F) = 1 - (0.53 + 0.32 + 0.11 + .03 + 0.01) = 0$$

5 In summation, the model estimates that about 53% of people rate it an ‘A,’ 32% a ‘B,’ 11% a ‘C,’ 3% a ‘D,’ 1% an  
6 ‘E,’ and <1% ‘F’. The new LOS could be reported as ‘A’ using the median value predicted by the model or as a “B”  
7 (1.67) using the weighted average of the predicted distribution.

## 8 DISCUSSION

9 The recommended model (B) uses variables that are readily available for most collector-level and above roadways.  
10 Application of the model was compared to comfort scores on intercept survey data from another project of actual  
11 bicyclists on a variety of protected bike lanes. The predicted median comfort ratings and distributions of those  
12 ratings are generally similar to the responses from the survey.

13 The model is only valid for the following situations:

- 14 • ADT volume of approximately 9,000 to 30,000 vehicles per day
- 15 • Speed limit between 25 and 35 MPH
- 16 • Buffer type is posts, parked cars, raised surface with an unoccupied parking lane, or planters

17 This model can be used to complement the *HCM 2010* methodology when protected bike lanes are being  
18 considered. For situations that fall outside the range of this model, the Danish LOS model provides a useful  
19 substitute.

20 A significant limitation of this study is the variety of protected bike lanes used in the clips. Due to logistical  
21 constraints and the limited number of protected bike lane installations in the US, study sites for this project were  
22 limited to the Portland area and a few locations in Chicago and San Francisco. The ability to show a wider variety of  
23 facilities was further limited by the desire to show multiple clips from the same facility in order to isolate the impact  
24 of motor vehicle traffic on user comfort in the video, to include reference video clips of more common bicycling  
25 infrastructure, and to limit the survey to about 15 minutes. Most notably, there are multiple video clips of a two-way  
26 facility; however, they are all from Dearborn Street in downtown Chicago. Therefore, the two-way dummy variable  
27 in the model is based on one facility in a dense urban environment. Additionally, the planter and raised with  
28 unoccupied parking buffer types are represented by only one facility and that the parking buffer is unoccupied in the  
29 video is a limitation in that this situation will only exist in specific situations (e.g. residential areas in the daytime).  
30 Another significant limitation of this study is that it does not include intersections. This was an intentional decision  
31 made in order to isolate the variables that influence segment level comfort. The buffer alongside a protected bike  
32 lane necessarily disappears at intersections, making it seem likely that comfort is likely to be less through an  
33 intersection. Finally, the sample used in this survey is relatively young in age, rides more frequently than the general  
34 population.

35 Surveys were conducted only in Portland, Oregon, but we believe the results are generally transferable  
36 across the US. Previous studies (12, 24) have produced conflicting results on whether the location of a survey  
37 impacts results. The one study that found a difference among locations noted that respondents in areas with a metro  
38 population of greater than one million (i.e. San Francisco, California and Chicago, Illinois) generally had lower  
39 levels of comfort than smaller areas (i.e. College Station, Texas and New Haven, Connecticut) (12). Finally, there  
40 are a limited number of protected bike lanes in the Portland metropolitan area and many of the respondents do not  
41 bicycle frequently, so do we not expect biases due to familiarity with this type of treatment.

## 42 CONCLUSIONS

43 This paper presented a mathematical model to predict how comfortable a bicyclist is likely to feel riding in a  
44 protected bike lane under various conditions. This work is a unique contribution in that there are currently no such  
45 models to predict bicyclist comfort in protected bike lanes that are based on data from the U.S. The final  
46 recommended model, a cumulative logistic model, predicts the probability that a user will provide a given comfort  
47 score for a facility. This can also be interpreted as the percentage of the population that would view the facility at a

1 given comfort rating; thereby providing a more complete picture of the facility's performance than can be  
2 ascertained from a mean score provided by a simple linear model. A single score can be reported based on the  
3 critical threshold desired by the agency (i.e. a policy that the score is based on a certain percentile of the population  
4 viewing the facility at that score or better).

5 Future research related to quantifying bicyclist comfort in protected bike lanes should focus on intersection  
6 treatments. Given the narrow range of median values for the protected bike lane clips, the utility of a more robust  
7 effort to create a segment model may not be as high as creating an intersection model. There are several different  
8 intersection treatments in use today, which is likely indicative of a limited understanding of how well they perform  
9 in regards to bicyclist comfort, among other factors. Such an effort should be modeled after this study and other  
10 previous efforts. Ideally, an intersection model would eventually be combined with a segment model to provide a  
11 complete picture of an entire route. The model created for this project only includes protected bike lanes. A  
12 comprehensive model incorporating all types of bicycle facilities should be created. The resulting model should be  
13 either a simple index model or a cumulative logistic model using readily available data. It should also incorporate  
14 other types of bicycle facilities not covered in most models, such as buffered bike lanes.

## 15 ACKNOWLEDGEMENTS

16 The authors would like to thank Mark Person of Mackenzie and Sam Thompson and Tara Goddard of Portland State  
17 University for their assistance in recruiting survey participants. Theo Petritsch of Sprinkle Consulting, Inc. provided  
18 the video clips from NCHRP 3-70, which were used for video quality comparison. The Department of Civil  
19 Engineering at Portland State University contributed funds used in this project. The authors acknowledge the  
20 USDOT and National Institute for Transportation Communities and People for Bikes for funding the related project.

## 21 REFERENCES

- 22 1. *Inventory of Protected Green Lanes*. People for Bikes. Updated February 28, 2014.  
23 <http://www.peopleforbikes.org/green-lane-project/pages/inventory-of-protected-bike-lanes>. Accessed April  
24 28, 2014.
- 25 2. Pucher, J. and R. Buehler. "Making Cycling Irresistible: Lessons from The Netherlands, Denmark and  
26 Germany." *Transport Reviews*, Vol. 28, No. 4, 2008, pp. 495-528.
- 27 3. Tilahun, N. Y., D. M. Levinson, and K. J. Krizek. "Trails, Lanes, or Traffic: Valuing Bicycle Facilities with  
28 an Adaptive Stated Preference Survey." *Transportation Research Part A: Policy and Practice*. Vol. 41,  
29 2007, pp. 287-301.
- 30 4. Winters, M., and Teschke, K. "Route Preferences Among Adults in the Near Market for Bicycling:  
31 Findings of the Cycling in Cities Study." *American Journal of Health Promotion*, Vol. 25, 2010, pp. 40-47.
- 32 5. Monsere, C. M., N. McNeil, and J. Dill. "Multi-User Perspectives on Separated, On-Street Bicycle  
33 Infrastructure." In *Transportation Research Record: Journal of the Transportation Research Board*, No.  
34 2314, Transportation Research Board of the National Academies, Washington, D.C., 2012, pp. 22-30.
- 35 6. Sanders, R. L. *Examining the Cycle: How Perceived and Actual Bicycling Risk Influence Cycling*  
36 *Frequency, Roadway Design Preferences, and Support for Cycling Among Bay Area Residents*.  
37 Dissertation, University of California Transportation Center, University of California, Berkeley, 2013.
- 38 7. Dill, J. and McNeil, M. "Four Types of Cyclists? Examination of Typology for Better Understanding of  
39 Bicycling Behavior and Potential." In *Transportation Research Record: Journal of the Transportation*  
40 *Research Board*, No. 2387, Transportation Research Board of the National Academies, Washington, D.C.,  
41 2013, pp. 129-138.
- 42 8. *Highway Capacity Manual 2010*. Transportation Research Board, National Research Council, Washington,  
43 D.C., 2011.
- 44 9. Mekuria, M. C., P. G. Furth, and H. Nixon. *Low-Stress Bicycling and Network Connectivity*. MTI Report  
45 11-19. Mineta Transportation Institute, May 2012.
- 46 10. *Bicycle Environmental Quality Index (BEQI), Draft Report – 2009*. San Francisco Department of Public  
47 Health, 2009.

- 1 11. Jensen, S. U. "Pedestrian and Bicyclist Level of Service on Roadway Segments." In *Transportation*  
2 *Research Record: Journal of the Transportation Research Board, No. 2031*, Transportation Research  
3 Board of the National Academies, Washington, D.C., 2007, pp. 43-51.
- 4 12. Dowling, R., D. Reinke, A. Flannery, P. Ryus, M. Vandehey, T. Petritsch, B. Landis, N. Roupail, and J.  
5 Bonneson. *Multimodal Level of Service Analysis for Urban Streets*. NCHRP Report 616, Transportation  
6 Research Board of the National Academies, Washington, D.C., 2008.
- 7 13. Petritsch, T. A., B. W. Landis, H. F. Huang, P. S. McLeod, M. Guttenplan, and L. Crider. Video Simulation  
8 of Roadway Bicycling. Presented at the 86th Annual Meeting of the Transportation Research Board,  
9 Washington, D.C., 2007.
- 10 14. N. Foster. *Predicting Bicyclist Comfort in Protected Bike Lanes*. Master's Thesis, Portland State  
11 University, 2014.
- 12 15. Jensen, S. U., C. Rosenkilde, and N. Jensen. Road Safety and Perceived Risk of Cycle Facilities in  
13 Copenhagen. City of Copenhagen, Denmark, 2007.
- 14 16. Goodno, M., N. McNeil, J. Parks, and S. Dock. "Evaluation of Innovative Bicycle Facilities in Washington,  
15 DC: Pennsylvania Avenue Median Lanes and 15<sup>th</sup> Street Cycle Track." In *Transportation Research*  
16 *Record: Journal of the Transportation Research Board, No. 2387*, Transportation Research Board of the  
17 National Academies, Washington, D.C., 2013, pp. 139-148.
- 18 17. Sorton, A. and Walsh, T. "Bicycle Stress Level as a Tool to Evaluate Urban and Suburban Compatibility."  
19 In *Transportation Research Record: Journal of the Transportation Research Board, No. 1438*,  
20 Transportation Research Board of the National Academies, Washington, D.C., 1994, pp. 17-23.
- 21 18. Noël, N., C. Leclerc, and M. Lee-Gosselin. CRC Index: Compatibility of Roads for Cyclists in Rural and  
22 Urban Fringe Areas. Presented at the 82nd Annual Meeting of the Transportation Research Board,  
23 Washington, D.C., 2003.
- 24 19. Jensen, S. U. Pedestrian and Bicycle Level of Service at Intersections, Roundabouts and Other Crossings.  
25 Presented at the 92nd Annual Meeting of the Transportation Research Board, Washington, D.C., 2013.
- 26 20. Landis, B. W., V. R. Vattikuti, and M. T. Brannick. "Real-Time Human Perceptions: Toward a Bicycle  
27 Level of Service." In *Transportation Research Record: Journal of the Transportation Research Board, No.*  
28 *1578*, Transportation Research Board of the National Academies, Washington, D.C., 1997, pp. 119-126.
- 29 21. Landis, B. W., V. R. Vattikuti, R. M. Ottenberg, T. A. Petritsch, M. Guttenplan, and L. B. Crider.  
30 "Intersection Level of Service for the Bicycle Through Movement." In *Transportation Research Record:*  
31 *Journal of the Transportation Research Board, No. 1828*, Transportation Research Board of the National  
32 Academies, Washington, D.C., 2003, pp. 101-106.
- 33 22. Petritsch, T. A., B. W. Landis, H. F. Huang, P. S. McLeod, D. Lamb, W. Farah, and M. Guttenplan.  
34 "Bicycle Level of Service for Arterials." In *Transportation Research Record: Journal of the*  
35 *Transportation Research Board, No. 2031*, Transportation Research Board of the National Academies,  
36 Washington, D.C., 2007, pp. 34-42.
- 37 23. Petritsch, T. A., S. Ozkul, P. McLeod, B. Landis, and D. McLeod. "Quantifying Bicyclists' Perceptions of  
38 Shared-Use Paths Adjacent to the Roadway." In *Transportation Research Record: Journal of the*  
39 *Transportation Research Board, No. 2198*, Transportation Research Board of the National Academies,  
40 Washington, D.C., 2010, pp. 124-132.
- 41 24. Harkey, D. L., D. W. Reinfurt, M. Knuiman, J. R. Stewart, and A. Sorton. *Development of the Bicycle*  
42 *Compatibility Index: A Level of Service Concept, Final Report*. Publication FHWA-RD-98-072. FHWA,  
43 U.S. Department of Transportation, 1998.
- 44 25. Hummer, J. E., N. Roupail, R. G. Hughes, S. J. Fain, J. L. Toole, R. S. Patten, R. J. Schneider, J. F.  
45 Monahan, and A. Do. "User Perceptions of the Quality of Service on Shared Paths." In *Transportation*  
46 *Research Record: Journal of the Transportation Research Board, No. 1939*, Transportation Research  
47 Board of the National Academies, Washington, D.C., 2005, pp. 28-36.



- 1       26. *City of Fort Collins Multimodal Transportation Level of Service Manual*. City of Fort Collins  
2       Transportation Master Plan, Fort Collins, CO, 1997.
- 3       27. Jones, E. G., and Carlson, T. D. “Development of Bicycle Compatibility Index for Rural Roads in  
4       Nebraska.” In *Transportation Research Record: Journal of the Transportation Research Board, No. 1828*,  
5       Transportation Research Board of the National Academies, Washington, D.C., 2003, pp. 124-132.
- 6       28. Flannery, A., A. T. Ali, and C. M. Cristei. Using Cumulative Logistic Regression Model for Evaluating  
7       Bicycle Facilities on Urban Arterials. Presented at the 91st Annual Meeting of the Transportation Research  
8       Board, Washington, D.C., 2012
- 9       29. Monsere, C., J. Dill, N. McNeil, K. Clifton, N. Foster, T. Goddard, M. Berkow, J. Gilpin, K. Voros, D. van  
10       Hengel, and J. Parks. *Lessons from the Green Lane: Evaluating Protected Bike Lanes in the U.S.*  
11       Publication NITC-RR-583, National Institute for Transportation and Communities, Portland, OR, 2014.
- 12       30. Dill, J. and Gliebe, J. *Understanding and Measuring Bicycling Behavior: A Focus on Travel Time and*  
13       *Route Choice*. Publication OTREC-RR-08-03, Oregon Transportation Research and Education Consortium,  
14       2008.
- 15       31. *R: A Language and Environment for Statistical Computing*. R Core Team, R Foundation for Statistical  
16       Computing, Vienna, Austria, 2013.
- 17       32. Christensen, R. H. B. *ordinal – Regression Models for Ordinal Data*. R package version 2013.9-30, 2013.
- 18       33. Wickham, H. “The Split-Apply-Combine Strategy for Data Analysis.” *Journal of Statistical Software, Vol.*  
19       *40, No. 1*, 2011, pp. 1-29.
- 20       34. Venables, W. N. and Ripley, B. D. *Modern Applied Statistics with S*, 4th Edition. Springer, New York,  
21       2002.