

Portland State University

**PDXScholar**

---

Civil and Environmental Engineering Faculty  
Publications and Presentations

Civil and Environmental Engineering

---

7-25-2024

# Examining Driver Injury Severity in Motor Vehicle Crashes: A Copula-Based Approach Considering Temporal Heterogeneity in a Developing Country Context

Shahrior Pervaz

*University of Central Florida*

Tanmoy Bhowmik

*Portland State University, tbhowmik@pdx.edu*

Naveen Eluru

*University of Central Florida*

Follow this and additional works at: [https://pdxscholar.library.pdx.edu/cengin\\_fac](https://pdxscholar.library.pdx.edu/cengin_fac)



Part of the [Civil and Environmental Engineering Commons](#)

**Let us know how access to this document benefits you.**

---

## Citation Details

Pervaz, S., Bhowmik, T., & Eluru, N. (2024). Examining driver injury severity in motor vehicle crashes: A copula-based approach considering temporal heterogeneity in a developing country context. *Accident Analysis & Prevention*, 206, 107721.

This Pre-Print is brought to you for free and open access. It has been accepted for inclusion in Civil and Environmental Engineering Faculty Publications and Presentations by an authorized administrator of PDXScholar. Please contact us if we can make this document more accessible: [pdxscholar@pdx.edu](mailto:pdxscholar@pdx.edu).

**Examining Driver Injury Severity in Motor Vehicle Crashes: A Copula-Based Approach  
Considering Temporal Heterogeneity in a Developing Country Context**

**Shahrion Pervaz\***

Graduate Research Assistant  
Department of Civil, Environmental and Construction Engineering  
University of Central Florida, and  
Assistant Professor  
Accident Research Institute  
Bangladesh University of Engineering and Technology, Dhaka  
Tel: 1-407-561-0298  
Email: [shahrion.pervaz@ucf.edu](mailto:shahrion.pervaz@ucf.edu)  
ORCID number: 0000-0001-7966-7083

**Tanmoy Bhowmik**

Assistant Professor  
Department of Civil and Environmental Engineering  
Portland State University  
Tel: 1-407-927-6574  
Email: [tbhowmik@pdx.edu](mailto:tbhowmik@pdx.edu)  
ORCID number: 0000-0002-0258-1692

**Naveen Eluru**

Professor  
Department of Civil, Environmental and Construction Engineering  
University of Central Florida  
Tel: 407-823-4815, Fax: 407-823-3315  
Email: [naveen.eluru@ucf.edu](mailto:naveen.eluru@ucf.edu)  
ORCID number: 0000-0003-1221-4113

---

\*Corresponding author

1 **ABSTRACT**

2 Using data from a developing country, the current study develops a copula-based joint modeling  
3 framework to study crash type and driver injury severity as two dimensions of the severity process.  
4 To be specific, a copula-based multinomial logit model (for crash type) and generalized ordered  
5 logit model (for driver severity) is estimated in the study. The data for our analysis is drawn from  
6 Bangladesh for the years of 2000 to 2015. Given the presence of multiple years of data, we develop  
7 a novel spline variable generation approach that facilitates easy testing of variation in parameters  
8 across time in crash type and severity components. A comprehensive set of independent variables  
9 including driver and vehicle characteristics, roadway attributes, environmental and weather  
10 information, and temporal factors are considered for the analysis. The model results identify  
11 several important variables (such as driving under the influence of drug and alcohol, speeding,  
12 vehicle type, maneuvering, vehicle fitness, location type, road class, road geometry, facility type,  
13 surface quality, time of the day, season, and light conditions) affecting crash type and severity  
14 while also highlighting the presence of temporal instability for a subset of parameters. The superior  
15 model performance was further highlighted by testing its performance using a holdout sample.  
16 Further, an elasticity exercise illustrates the influence of the exogenous variables on crash type and  
17 injury severity dimensions. The study findings can assist policy makers in adopting appropriate  
18 strategies to make roads safer in developing countries.

19

20 **Keywords:** Developing country, Driver injury severity, Crash type, Copula model, Temporal  
21 heterogeneity.

1    **1    BACKGROUND**

2    Road traffic crashes disproportionately affect low and middle-income countries of the world. It is  
3    estimated that with only 60% of the world's registered vehicles, these countries account for 93%  
4    of the crash fatalities in the world (WHO, 2019). It is not surprising that per-capita death rates in  
5    these countries is more than three times higher than per-capita death rates in high-income countries  
6    (WHO, 2019). While high-income countries have shown some success in reducing the number of  
7    road deaths, low and middle-income countries are still in the initial stages of developing remedial  
8    solutions. The current study contributes to literature on driver injury severity analysis using data  
9    from Bangladesh.

10            In Bangladesh, a developing country in south-east Asia, 3-5% of national's gross domestic  
11    products (GDP) are lost due to road traffic crashes (Pervaz et al., 2022; WHO, 2019). The unique  
12    driver behavior, roadway characteristics, traffic composition, traffic flow, and roadway  
13    environment contribute to a fundamentally different system compared to the systems in developed  
14    countries. It is common for roadways designed as limited access facilities to be operated with  
15    severe encroachments due to markets or roadside settlements. Further, heterogenous, and mixed  
16    traffic flow results in complex interactions (compared to developed countries). Compounding the  
17    challenges, the recent economic growth and rising per capita income have induced rapid  
18    motorization in the country while road safety management and interventions have not been  
19    progressed at the same pace.

20

21    **1.1    Earlier Research**

22    Road safety research, similar to other developing countries, is hindered in Bangladesh due to  
23    financial constraints and underreporting of crash data. In Bangladesh, police record the crash

1 information once a crash occurs and store the data in the Micro-Computer Accident Analysis  
2 Package (MAAP5) database. This database is later shared with different road safety organizations  
3 of the country. As the police reported database provides detailed crash information, several road  
4 safety research have been conducted relying on this database. Most of earlier research efforts using  
5 these data described the crash and casualty characteristics of pedestrians (Hoque and Mahmud,  
6 2010; Pervaz et al., 2016), motorcyclists (Akter and Pervaz, 2019; Pervaz et al., 2020a), bicyclists  
7 (Hoque et al., 2008), children (Hoque et al., 2009), car involved crashes (Ahsan et al., 2011), urban  
8 crashes (Pervaz et al., 2020b; Uddin et al., 2021), highway crashes (Hoque et al., 2020, 2014) and  
9 overall safety situation of the country (Pervaz et al., 2022) employing descriptive analytics. Many  
10 studies also focused on the hazardous road location identification (Hoque and Mahmud, 2009;  
11 Mahmud et al., 2011) and safety ratings of roadways (Hoque et al., 2016). While these studies  
12 identify important crash characteristics and trends, the impacts of different attributes on crashes  
13 cannot be obtained from these studies.

14 A small set of studies applied statistical and econometric models. In modeling crash  
15 frequency analysis, studies applied Poisson regression (Hadiuzzaman et al., 2016; Sadeek and  
16 Rifaat, 2020) and negative binomial regression models (Hadiuzzaman et al., 2016; Islam et al.,  
17 2022) to estimate the impact of roadway, traffic and sociodemographic characteristics on crash  
18 counts. In the realm of injury severity studies, several research efforts were conducted. Researchers  
19 examined crash injury severity (Anowar et al., 2014; Hossain et al., 2022; Kamruzzaman et al.,  
20 2014), pedestrian injury severity (Hasanat-E-Rabbi et al., 2022; Saha et al., 2021; Sarkar et al.,  
21 2011; Zafri et al., 2020), motorcyclist injury severity (Rahman et al., 2021), unconventional and  
22 transit vehicle occupant severity (Saha et al., 2023, 2022). These efforts considered severity  
23 outcome as a dichotomous variable (usually fatal and non-fatal injury), or a polytomous variable

1 (with categorical outcomes including fatal, major injury, minor injury, and no-injury). For  
2 dichotomous variables, as expected, researchers predominantly applied binary probit/logit models  
3 (Hossain et al., 2022; Rahman et al., 2021; Sarkar et al., 2011; Zafri et al., 2020). For polytomous  
4 variable, research efforts mostly applied ordered probit model (Barua and Tay, 2010; Hasanat-E-  
5 Rabbi et al., 2022; Kamruzzaman et al., 2014), partial proportional odds model (Anowar et al.,  
6 2014; Hasanat-E-Rabbi et al., 2022), and multinomial logit model (Hasanat-E-Rabbi et al., 2022).  
7 Advanced models including latent segmentation-based logit models were also employed for injury  
8 severity analysis (Saha et al., 2023, 2022, 2021). In these advanced studies, the authors captured  
9 the unobserved heterogeneity by estimating differential impacts of a variable in higher-risk and  
10 lower-risk segments while also estimating the heterogeneity in means of a variable within a  
11 segment in the model system.

12         The significant contributing factors to injury severity outcome reported in these studies are  
13 road user characteristics (such as gender, age, activities, restraint use, alcohol and drug suspicion),  
14 vehicle characteristics (such as single-vehicle, trucks, buses, cars, baby taxies, auto rickshaws,  
15 tractors, non-motorized vehicles, motorcycles and vehicle defects), roadway attributes (such as  
16 rural area, regional roads, city roads, undivided roads, two-way streets, non-intersection, flat roads,  
17 police control, stop control, and dry pavement), environmental and weather factors (such as  
18 weekend, off-peak periods, nighttime, dawn and dusk, night-lighted, night-unlighted, rainy season  
19 and winter season), built environment and land-use characteristics (such as bus stop, distance from  
20 airport, distance from ferry station and mixed-land use), and crash specific characteristics (such as  
21 head-on, rear-end, right-angle, hit-pedestrian, hit-objects, hit-parked-vehicles, and sideswipe crash  
22 types).

## 1 1.2 Study Context

2 The review has highlighted the breadth of research examining injury severity in Bangladesh. Yet,  
3 there are several important issues that need to be addressed in the modeling efforts. The research  
4 on severity analysis assumes the entire parameter space to remain the same across the entire  
5 population of crash records. While literature has developed latent class models that address this  
6 limitation to some extent, it is possible that some variables (such as crash type) can mediate the  
7 influence of several independent variables (Yasmin et al., 2014a, 2014b).

8 The current study proposes a framework that explicitly allows for a crash type specific  
9 injury severity profile. Specifically, we recognize that crash type and severity represent joint  
10 decisions and are modeled as a joint econometric model system with two dimensions (Rana et al.,  
11 2010; Yasmin et al., 2014b). The approach allows to accommodate for the influence of observed  
12 and unobserved factors affecting crash type and severity. We employ a joint copula framework  
13 with a multinomial logit model for crash type and generalized ordered logit model for crash  
14 severity. The copula-based approach offers several advantages. First, copula-based approaches  
15 offer the flexibility to link error terms that are not from the same distribution. Second, copula-  
16 based approaches allow for an analytical formulation i.e., the probability expressions for the joint  
17 models are closed form expression and can be evaluated analytically (without simulation). Thus,  
18 the model estimation procedures are based on maximum likelihood and are likely to be more  
19 accurate compared to linking approaches that require us to adopt simulation based maximum  
20 likelihood estimation (see Bhat, 2011 for more details). Finally, copula-based approach via the  
21 different copulas offers various dependency structures that span the potential spectrum of  
22 dependencies (see Bhat and Eluru, 2009 and Yasmin and Eluru, 2014b for more details). In our

1 analysis, we consider six copula structures including Gaussian copula, the Farlie-Gumbel-  
 2 Morgenstern (FGM) copula, and set of Archimedean copulas (Frank, Clayton, Joe and Gumbel).

3 Further, earlier research using data from multiple years has implicitly assumed temporal  
 4 stability of parameters. As noted by Mannering (2018), temporal stability needs to be assessed  
 5 carefully for multi-year data (Mannering, 2018). The proposed econometric model system  
 6 incorporates various spline functional forms that allow for temporal variations in parameter effects  
 7 over time (see Eluru and Gayah, 2022). The spline functional form is an improvement on the year  
 8 specific dummy effects and allows for easy examination of change in parameter values across  
 9 years (Shabab et al., 2024 for a detailed discussion on the spline approach). In the spline approach,  
 10 instead of creating year specific dummy variables, we create time variables using the following  
 11 approach:

$$nYear_1 = Max(Year_{record} - Year_{base} + 1, 0) \tag{1}$$

$$nYear_2 = Max((Year_{record} - Year_{base} + 1) - 1, 0) \tag{2}$$

...

$$nYear_N = Max((Year_{record} - Year_{base} + 1) - (N - 1), 0) \tag{3}$$

12 where  $Year_{record}$  corresponds to year of the observation,  $Year_{base}$  corresponds to the first year of  
 13 data (in this study,  $Year_{base} = 2000$ ), and  $N(1, 2, \dots, N)$  represents the years starting from 2000.  
 14 The approach will yield the same number of variables as the year dummy approach. These  
 15 variables can be interacted with any independent variable to test the temporal stability of that  
 16 variable<sup>1</sup>. The approach effectively serves as a piecewise linear formulation for each parameter

---

<sup>1</sup>Our equation system begins with the possibility that all parameters are temporally unstable. We consider the interaction of the variable and year splines for the base year to the last year of the data to test this variability based on the t-statistics of the parameter values. If the interaction becomes significant for the base year only, then the slope of



1 over the years. For illustration, let's consider a small dataset with driving under the influence of  
 2 drug and alcohol (DUI) variable where DUI is equal to 1 if the driver is found driving under the  
 3 influence of drug and alcohol and 0 otherwise. Table 1 presents the dataset for the six-year period  
 4 (2000 to 2005) of DUI variable.

5  
 6 **Table 1: Example Dataset for Spline Formulation**

Year	DUI	nYear1	nYear2	nYear3	nYear4	nYear5	nYear6	DUI*nYear1	DUI*nYear2	DUI*nYear3	DUI*nYear4	DUI*nYear5	DUI*nYear6
2000	1	1	0	0	0	0	0	1	0	0	0	0	0
2001	0	2	1	0	0	0	0	0	0	0	0	0	0
2002	1	3	2	1	0	0	0	3	2	1	0	0	0
2003	0	4	3	2	1	0	0	0	0	0	0	0	0
2004	0	5	4	3	2	1	0	0	0	0	0	0	0
2005	1	6	5	4	3	2	1	6	5	4	3	2	1

7  
 8 In the spline formulation approach, we will use a total of six variables (DUI\*nYear1 to  
 9 DUI\*nYear6) to capture the change of the slope of the DUI variable effect over time in the model.

10 For example, if the estimates for DUI variable are found to be 0.30 (for DUI\*nYear<sub>1</sub>), -0.45 (for

---

the effect of the variable will not change for the rest of the years which implies that the variable is truly linear over time. If the variable shows significant effect for base year and another year, let's say for the fourth year, then the variable slope remains the same up to the third year and from the fourth year, the slope of the effect will change. If the analyst wants to consider a temporally invariable effect, the analyst can simply introduce the variable of interest directly in the model.

1 DUI\*nYear<sub>3</sub>), and 0.25 (for DUI\*nYear<sub>6</sub>) for the year 2000, 2002 and 2005 respectively, the net  
2 estimate of DUI variable by year is as follows:

- 3 • For the year 2000, the estimate is 0.30,
- 4 • For the year 2001, the estimate is 0.60 (0.30\*2),
- 5 • For the year 2002, the estimate is 0.45 (0.30\*3-0.45),
- 6 • For the year 2003, the estimate is 0.30 (0.30\*4-0.45\*2),
- 7 • For the year 2004, the estimate is 0.15 (0.30\*5-0.45\*3),
- 8 • For the year 2005, the estimate is 0.25 (0.30\*6-0.45\*4+0.25),

9 The illustration described above shows how the spline variables allow for flexible evaluation of  
10 changes in parameter effects over time.

11 In summary, the current research effort contributes to safety literature both  
12 methodologically and empirically. In terms of methodology, we formulate a copula-based temporal  
13 multinomial (MNL)-generalized ordered logit (GOL) model to jointly estimate crash type and  
14 severity sustained by drivers in motor vehicle crashes. The study examines six copula structures -  
15 Gaussian, Farlie-Gumbel-Morgenstern (FGM), Frank, Clayton, Joe, and Gumbel to consider a  
16 wide range of dependency structures. We also accommodate for the potential heterogeneity across  
17 drivers in the dependency effect of crash type and injury severity within the proposed model  
18 system. In terms of empirical analysis, using police reported crash data from Bangladesh for the  
19 years 2000 to 2015, the study focuses on injury severity sustained by drivers in motor vehicle  
20 crashes. We use six crash types (head-on, rear-end, right-angle, sideswipe, single-vehicle and hit-  
21 parked-vehicle crashes) and four severity levels (fatal, grievous, simple and no injury) as our  
22 dependent variable categories. A comprehensive set of exogenous variables including driver and

1 vehicle characteristics, roadway attributes, environmental and weather information, and temporal  
2 factors is considered for the analysis of the models.

3

## 4 **2 METHODOLOGY**

5 The focus of our study is to jointly model the crash type and injury severity outcome of drivers in  
6 motor vehicle crashes using a copula-based joint multinomial logit (MNL)-generalized ordered  
7 logit (GOL) modeling framework. For the current study, we followed the methodology presented  
8 by Yasmin et al. (2014b). The econometric frameworks for both components are described in the  
9 following sections.

10

### 11 **2.1 The Crash Type Model Component**

12 Let  $q$  ( $q = 1, 2, \dots, Q$ ) be the indices to represent drivers and  $k$  ( $k = 1, 2, \dots, K$ ) represents  
13 crash types (here,  $k = 1$  for head-on,  $k = 2$  for rear-end,  $k = 3$  for right-angle,  $k = 4$  for sideswipe,  
14  $k = 5$  for single-vehicle, and  $k = 6$  for hit-parked-vehicle crashes). Let  $j$  be the index for the discrete  
15 outcome that corresponds to the injury severity level  $j$  ( $j = 1, 2, \dots, J$ ) of driver  $q$ . In this study,  
16  $j$  takes four severity levels:  $j = 1$  for no injury,  $j = 2$  for simple injury,  $j = 3$  for grievous injury,  
17 and  $j = 4$  for fatal injury. In the joint framework, the modeling of crash type is undertaken using  
18 the multinomial logit structure. Thus, the propensity of a driver  $q$  involving in a specific crash type  
19  $k$  takes the form of:

$$u_{qk}^* = \beta_k x_{qk} + \xi_{qk} \quad (4)$$

20 where,  $x_{qk}$  is a column vector of exogenous variable,  $\beta_k$  is a row vector of unknown  
21 parameters specific to crash type  $k$  and  $\xi_{qk}$  is an idiosyncratic error term (assumed to be standard

1 type-I extreme value distributed) capturing the effects of unobserved factors on the propensity  
 2 associated with crash type  $k$ . A driver  $q$  is assumed to be involved in a crash type  $k$  if and only if  
 3  $q$  is associated with the maximum propensity among all  $k$  crash types, that is if the following  
 4 condition holds:

$$u_{qk}^* > \max_{l=1,2,\dots,k, \text{ and } l \neq k} u_{ql}^* \quad (5)$$

5 The condition demonstrated in equation 5 can be expressed as a series of binary outcome  
 6 models for each crash type  $k$  (Lee, 1983). Let  $\eta_{qk}$  be a dichotomous variable with  $\eta_{qk} = 1$  if a  
 7 driver  $q$  ends up in a crash type  $k$  and  $\eta_{qk} = 0$  otherwise. Thus, we can define a stochastic term  
 8  $v_{qk}$  as follows:

$$v_{qk} = \xi_{qk} - \left\{ \max_{l=1,2,\dots,k, l \neq k} u_{ql}^* \right\} \quad (6)$$

9 The reader would note that in this study the  $v_{qk}$  term is specified following Portoghesi et  
 10 al. (2011) which is different than Lee's transformation (please see Yasmin et al., 2014b for detailed  
 11 description).

12 By substituting the right side for  $u_{qk}^*$  from equation 4 in equation 5, we can write:

$$\eta_{qk} = 1 \text{ if } \beta_k x_{qk} + v_{qk} > 0 \quad (7)$$

13 In equation 7, the probability expression of crash type is dependent on the distributional  
 14 assumption of  $v_{qk}$ , which in turn depends on the distributional assumption of  $\xi_{qk}$ . Thus, an  
 15 assumption of independent and identical Type 1 Gumbel distribution for  $\xi_{qk}$  results in a logistic  
 16 distributed  $v_{qk}$ . Consequently, the probability expression for the corresponding crash type can be  
 17 expressed as follows:

$$\Lambda_k(\beta_k x_{qk}) = Pr(v_{qk} > -\beta_k x_{qk}) = \frac{\sum_{l \neq k} \exp(\beta_k x_{ql})}{\exp(\beta_k x_{qk}) + \sum_{l \neq k} \exp(\beta_k x_{ql})} \quad (8)$$

1

## 2 **2.2 The Injury Severity Model Component**

3 In the joint model framework, the modeling of driver injury severity is undertaken using  
 4 generalized ordered logit (GOL) specification. In the traditional ordered logit (OL) model, the  
 5 discrete injury severity levels ( $y_{qk}$ ) are assumed to be associated with an underlying continuous  
 6 latent variable ( $y_{qk}^*$ ). This latent variable is typically specified as the following linear function:

$$y_{qk}^* = \alpha_k z_{qk} + \varepsilon_{qk}, \quad y_{qk} = j_k, \text{ if } \tau_{k,j-1} < y_{qk}^* < \tau_{k,j} \quad (9)$$

7

8 where,  $y_{qk}^*$  is the latent injury risk propensity for driver  $q$  if he/she was involved in a crash  
 9 type  $k$ ,  $z_{qk}$  is a vector of exogenous variables,  $\alpha_k$  is a row vector of unknown parameters and  $\varepsilon_{qk}$   
 10 is a random disturbance term assumed to be standard logistic.  $\tau_{k,j}$  ( $\tau_{k,0} = -\infty, \tau_{k,J} = \infty$ )  
 11 represents the threshold associated with severity level  $j$  for crash type  $k$ , with the following  
 12 ordering conditions:  $(-\infty < \tau_{k,1} < \tau_{k,2} < \dots < \tau_{k,J-1} < +\infty)$ .

12

13 GOL is a flexible form of the traditional OL model that relaxes the restriction of constant  
 14 threshold across population. The GOL model represents the threshold parameters as a linear  
 15 function of exogenous variables (Eluru et al., 2008; Srinivasan, 2002). In order to ensure the  
 16 ordering of observed discrete injury severity levels, we employ the following parametric form  
 followed by Eluru et al. (2008):

$$\tau_{k,j} = \tau_{k,j-1} + \exp(\phi_{kj} + \delta'_{kj} G_{kj}) \quad (10)$$

1 where,  $G_{kj}$  is a set of explanatory variables associated with the  $j^{th}$  threshold (excluding a  
 2 constant),  $\delta'_{kj}$  is a vector of parameters to be estimated and  $\phi_{kj}$  is a parameter associated with  
 3 injury severity level  $j$ . The remaining structure and probability expressions are similar to the OL  
 4 model. For identification reasons, we need to restrict one of the  $\delta'_j$  vectors to zero.

5 Given these relationships across the different parameters, the resulting probability  
 6 expressions for driver  $q$  sustaining an injury severity level  $j$  in a crash type  $k$  take the following  
 7 form:

$$Pr(y_{qk} = j_k) = \Lambda_k(\tau_{k,j-1} + \exp(\phi_{kj} + \delta'_{kj} G_{kj}) - \alpha_k z_{qk}) - \Lambda_k(\tau_{k,j-2} + \exp(\phi_{k,j-1} + \delta'_{k,j-1} G_{k,j-1}) - \alpha_k z_{qk}) \quad (11)$$

8 where,  $\Lambda_k(\cdot)$  is the standard logistic cumulative distribution function. The probability  
 9 expression of equation 11 represents the independent injury severity model for a crash type  $k$ .

10

### 11 **2.3 The Joint Model: A Copula-based Approach**

12 The crash type and the injury severity component discussed in previous two subsections can be  
 13 brought together in the following equation system:

$$\eta_{qk} = 1 \text{ if } \beta_k x_{qk} > -v_{qk} \quad (12)$$

$$y_{qk}^* = \alpha_k z_{qk} + \varepsilon_{qk}, \quad y_{qk} = 1[\eta_{qk} = 1]y_{qk}^*$$

14 The notation  $1[\eta_{qk} = 1]$  represents an indicator function taking the value 1 if  $\eta_{qk} = 1$  and 0  
 15 otherwise.

16 However, the level of dependency between the underlying crash type outcome and the  
 17 injury severity level of driver depends on the type and extent of dependency between the stochastic

1 terms  $v_{qk}$  and  $\varepsilon_{qk}$ . These dependencies (or correlations) are explored in the current study by using  
2 a copula-based approach. A copula is a mathematical device that identifies dependency among  
3 random variables with pre-specified marginal distribution (please see Bhat and Eluru, 2009;  
4 Trivedi and Zimmer, 2007 for a detailed description of the copula approach). In other words, it is  
5 a multivariate distribution function defined over the unit cube that links uniformly distributed  
6 marginals (Eluru et al., 2010). In constructing the copula dependency, the random variables  
7 ( $v_{qk}$  and  $\varepsilon_{qk}$ ) are transformed into uniform distributions by using their inverse cumulative  
8 distribution functions, which are then coupled or linked as a multivariate joint distribution function  
9 by applying the copula structure. Let us assume that  $\Lambda_{v_k}(\cdot)$  and  $\Lambda_{\varepsilon_k}(\cdot)$  are the marginal  
10 distribution of  $v_{qk}$  and  $\varepsilon_{qk}$ , respectively and  $\Lambda_{v_k, \varepsilon_k}(\cdot, \cdot)$  is the joint distribution of  $v_{qk}$  and  $\varepsilon_{qk}$ .  
11 Subsequently, a bivariate distribution  $\Lambda_{v_k, \varepsilon_k}(v, \varepsilon)$  can be generated as a joint cumulative  
12 probability distribution of uniform [0, 1] marginal variables  $U_1$  and  $U_2$  as below:

$$\begin{aligned}
\Lambda_{v_k, \varepsilon_k}(v, \varepsilon) &= Pr(v_{qk} < v, \varepsilon_{qk} < \varepsilon) \\
&= [\Lambda_{v_k}^{-1}(U_1) < v, \Lambda_{\varepsilon_k}^{-1}(U_2) < \varepsilon] \\
&= [U_1 < \Lambda_{v_k}(v), U_2 < \Lambda_{\varepsilon_k}(\varepsilon)]
\end{aligned} \tag{13}$$

13 The joint distribution (of uniform marginal variable) in equation 13 can be generated by a  
14 function  $C_{\theta_q}(\cdot, \cdot)$  (Sklar, 1973), such that:

$$\Lambda_{v_k, \varepsilon_k}(v, \varepsilon) = C_{\theta_q}(U_1 = \Lambda_{v_k}(v), U_2 = \Lambda_{\varepsilon_k}(\varepsilon)) \tag{14}$$

15 where  $C_{\theta_q}(\cdot, \cdot)$  is a copula function and  $\theta_q$  the dependence parameter defining the link  
16 between  $v_{qk}$  and  $\varepsilon_{qk}$ . It is important to note here that the level of dependence between crash type

1 and injury severity level can vary across drivers. Therefore, in the current study, the dependence  
 2 parameter  $\theta_q$  is parameterized as a function of observed crash attributes as follows:

$$\theta_q = fn(\gamma_k s_{qk}) \quad (15)$$

3 where,  $s_{qk}$  is a column vector of exogenous variable,  $\gamma_k$  is a row vector of unknown  
 4 parameters (including a constant) specific to crash type  $k$  and  $fn$  represents the functional form of  
 5 parameterization. Based on the dependency parameter permissible ranges, alternate  
 6 parameterization forms for the six copulas are considered in our analysis. For Gaussian, Farlie-  
 7 Gumbel-Morgenstern (FGM) and Frank Copulas we use  $\theta_q = \gamma_k s_{qk}$ , for the Clayton copula we  
 8 employ  $\theta_q = exp(\gamma_k s_{qk})$ , and for Joe and Gumbel copulas we employ  $\theta_q = 1 + exp(\gamma_k s_{qk})$ .

9

## 10 2.4 Estimation Procedure

11 The joint probability that the driver  $q$  gets involved in a crash type  $k$  and sustaining injury severity  
 12 level  $j$ , from equation 8 and 11, can be written as:

$$\begin{aligned} & Pr(\eta_{qk} = 1, y_{qk} = j_k) \\ &= Pr \left\{ (\beta_k x_{qk} > -v_{qk}), \left( \begin{aligned} & (\tau_{k,j-2} + \exp(\phi_{k,j-1} + \delta'_{k,j-1} G_{k,j-1}) - \alpha_k z_{qk}) \\ & < \varepsilon_{qk} < (\tau_{k,j-1} + \exp(\phi_{kj} + \delta'_{kj} G_{kj}) - \alpha_k z_{qk}) \end{aligned} \right) \right\} \\ &= Pr \left( (\beta_k x_{qk} > -v_{qk}), (\varepsilon_{qk} < \tau_{k,j-1} + \exp(\phi_{kj} + \delta'_{kj} G_{kj}) - \alpha_k z_{qk}) \right) \\ &\quad - Pr \left( (\beta_k x_{qk} > -v_{qk}), (\varepsilon_{qk} \right. \\ &\quad \left. < \tau_{k,j-2} + \exp(\phi_{k,j-1} + \delta'_{k,j-1} G_{k,j-1}) - \alpha_k z_{qk}) \right) \end{aligned} \quad (16)$$



$$\begin{aligned}
&= \Lambda_{\varepsilon k}(\tau_{k,j-1} + \exp(\Phi_{kj} + \delta'_{kj} G_{kj}) - \alpha_k z_{qk}) - \Lambda_{\varepsilon k}(\tau_{k,j-2} + \exp(\Phi_{k,j-1} + \\
&\delta'_{k,j-1} G_{k,j-1}) - \alpha_k z_{qk}) - (Pr[v_{qk} < -\beta_k x_{qk}, \varepsilon_{qk} < (\tau_{k,j-1} + \exp(\Phi_{kj} + \\
&\delta'_{kj} G_{kj}) - \alpha_k z_{qk})] - Pr[v_{qk} < -\beta_k x_{qk}, \varepsilon_{qk} < (\tau_{k,j-2} + \exp(\Phi_{k,j-1} + \\
&\delta'_{k,j-1} G_{k,j-1}) - \alpha_k z_{qk})])
\end{aligned}$$

1            The joint probability of equation 16 can be expressed by using the copula function in  
2 equation 14 as:

$$\begin{aligned}
Pr(\eta_{qk} = 1, y_{qk} = j_k) \\
&= \Lambda_{\varepsilon k}(\tau_{k,j-1} + \exp(\Phi_{kj} + \delta'_{kj} G_{kj}) - \alpha_k z_{qk}) \\
&- \Lambda_{\varepsilon k}(\tau_{k,j-2} + \exp(\Phi_{k,j-1} + \delta'_{k,j-1} G_{k,j-1}) - \alpha_k z_{qk}) \\
&- [C_{\theta q}(U_{q,j}^k, U_q^k) - C_{\theta q}(U_{q,j-1}^k, U_q^k)]
\end{aligned} \tag{17}$$

3            where  $U_{q,j}^k = \Lambda_{\varepsilon k}(\tau_{k,j-1} + \exp(\Phi_{kj} + \delta'_{kj} G_{kj}) - \alpha_k z_{qk})$ ,  $U_q^k = \Lambda_{v k}(-\beta_k x_{qk})$

4            Thus, the likelihood function with the joint probability expression in equation 17 for crash  
5 type and driver injury severity outcomes can be expressed as:

$$L = \prod_{q=1}^Q \left[ \prod_{k=1}^K \prod_{j=1}^J \{Pr(\eta_{qk} = 1, y_{qk} = j_k)\}^{\omega_{qkj}} \right] \tag{18}$$

6            where,  $\omega_{qkj}$  is dummy with  $\omega_{qkj} = 1$  if the driver  $q$  sustains crash type  $k$  and an injury severity  
7 level of  $j$  and 0 otherwise. All the parameters in the model are then consistently estimated by  
8 maximizing the logarithmic function of  $L$ . The parameters to be estimated in the model are:  $\beta_k$  in  
9 the MNL component,  $\alpha_k$  and  $\tau_{k,j}$ ,  $\Phi_{kj}$ ,  $\delta'_{kj}$  in GOL component, and finally  $\gamma_k$  in the dependency  
10 component. In our analysis we employ six different copulas structure - the Gaussian copula, the

1 Farlie-Gumbel-Morgenstern (FGM) copula, and set of Archimedean copulas including Frank,  
2 Clayton, Joe and Gumbel copulas (a detailed discussion of these copulas is available in Bhat and  
3 Eluru, 2009). We use the GAUSS matrix programming software to run the models (Aptech, 2015).

4

### 5 **3 DATA DESCRIPTION**

6 The data for our analysis are compiled from the Micro-Computer Accident Analysis Package  
7 (MAAP5) database preserved in the Accident Research Institute (ARI) of Bangladesh University  
8 of Engineering and Technology (BUET). We focus on the injury severity outcome sustained by  
9 drivers involved in a road crash. A total of 60,465 driver level records were obtained for the years  
10 2000 to 2015. Crashes involving hit-pedestrian and other non-motorized vehicles are excluded  
11 during the analysis as driver injury severity distribution is greatly influenced by these crash types.  
12 For instance, preliminary analysis found that nearly 98% of drivers do not sustain any injury during  
13 hit-pedestrian crashes. We also disregard crashes that involve more than two motor vehicles. After  
14 cleaning and processing the data, a total of 35,261 driver injury records were retained for the  
15 analysis. This study considers 10,000 records randomly for model estimation while setting aside  
16 the remaining 25,261 records for validation purposes. This study considers six crash types  
17 including head-on (HO), rear-end (RE), right-angle (RA), sideswipe (SS), single-vehicle (SV) and  
18 hit-parked-vehicle (HPV) as the dependent variable for crash type analysis and four severity levels  
19 including fatal injury (FI), grievous injury (GI), simple injury (SI) and no injury (NI) for severity  
20 analysis. Regarding the crash types, it is worthwhile to mention that the hit-parked-vehicle crash  
21 type includes crashes that occur due to the collisions between a moving vehicle and a vehicle that  
22 is parked predominantly on the street/roadside or stopped for passenger boarding/alighting or  
23 goods loading/unloading activities. The single-vehicle crashes include run-off-road, overturned,

1 and hit-object crashes. For independent variables, a comprehensive set of exogenous variables  
2 including driver and vehicle characteristics (such as restraint use, driving under influence of drug  
3 and alcohol, speeding, vehicle type, maneuvering, vehicle fitness, and defect), roadway attributes  
4 (such as location, road class, presence of divider, road geometry, surface condition, and traffic  
5 control system), environmental and weather factors (such as time of the day, season, light and  
6 weather conditions), and temporal factors (such as year-spline variables) is considered for model  
7 estimation. The sample share of the variables considered for the final model estimation is presented  
8 in Table A.1 in the Appendix section.

9

## 10 **4 EMPIRICAL ANALYSIS**

11

### 12 **4.1 Model Specification and Overall Measures of Fit**

13 The empirical analysis of the current study involves a series of model estimation. *First*, we  
14 developed a multinomial logit (MNL) to model six crash types and ordered logit (OL) to model  
15 driver injury severity for each crash type. *Second*, we estimated the temporal instability of the  
16 variables by using year splines and the interaction of year splines with other exogenous variables  
17 in both MNL and OL model systems. Next, we parametrized the thresholds to relax the monotonic  
18 effect of the OL models and developed generalized ordered logit (GOL) models. *Third*, with these  
19 independent model results, we build a joint model with six different copula structures: 1) Gaussian,  
20 2) FGM, 3) Frank, 4) Clayton, 5) Joe, and 6) Gumbel. *Fourth*, based on the significance of copula  
21 dependence parameter for each crash type, copula models that allow for different dependency  
22 structures for different crash types and injury severity combinations were estimated. Further, we  
23 parametrized dependence parameter in our model system.

1           The alternative copula models estimated are non-nested and hence, cannot be tested using  
2 the traditional log-likelihood ratio test (Yasmin et al., 2014b). We employ the Bayesian Information  
3 Criterion (BIC) to determine the best model among all copula models. The BIC for a given  
4 empirical model is equal to:

$$BIC = -2LL + N_p \ln(Q) \tag{19}$$

5 where LL is the log-likelihood value at convergence,  $N_p$  is the number of parameters, and  $Q$  is the  
6 number of observations. The model with the *lower* BIC value is the preferred model. The BIC  
7 values of the estimated models are shown in Table 2.

8

9 **Table 2: Comparison of the Estimated Models**

Model	Log-likelihood	No. of Parameters	BIC
MNL and OL models	-21,756.61	115	44,572.41
MNL and OL models with temporal heterogeneity	-21,280.59	152	43,961.14
MNL and GOL models with temporal heterogeneity (Independent copula)	-21,262.90	155	43,953.40
Gaussian copula	-21,260.90	155	43,949.40
FGM copula	-21,261.10	155	43,949.80
Frank copula	-21,260.20	155	43,948.00
Clayton copula	-21,262.90	155	43,953.40
Joe copula	-21,264.40	154	43,947.19
Gumbel copula	-21,264.90	154	43,948.19

<b>Model</b>	<b>Log-likelihood</b>	<b>No. of Parameters</b>	<b>BIC</b>
Joe-Frank copula	-21,259.80	155	43,947.20
Joe-Frank-FGM copula	-21,259.80	155	43,947.20
Gumbel-Frank copula	-21,262.10	154	43,942.59
Gumbel-Frank copula with parameterized dependency	-21,256.30	155	43,940.20

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16

Table 2 demonstrates that the MNL-OL models (separate model system) considering temporal heterogeneity outperform the models without considering temporal heterogeneity. This finding underscores that the effects of the several exogenous variables are not stable over time both on crash type and injury severity analysis. Further, MNL-GOL models outperform the MNL-OL models in terms of BIC value. The comparison exercise among copula models shows that with exclusively a single copula dependency structure, all the copula structures except Clayton offer better performance than independent model as shown in Table 2. The copula parameters for head-on and hit-parked-vehicle crash types were found statistically insignificant in all copula structures. The copula parameters for rear-end and right-angle crash types were observed to be significant in Joe and Gumbel structures while for sideswipe crash type, all the copula structures except Clayton showed significant copula parameters. For single-vehicle crash type, the FGM structure offered significant copula parameters for our dataset. We also tested the performance of combinations such as Joe-Frank, Joe-Frank-FGM and Gumbel-Frank copula structures and found that Gumbel-Frank combination offered improved BIC (lower) compared to other copula structures. Further, we parametrized the dependency parameter in the Gumbel-Frank copula structure and found that

1 parameterization provides improved BIC (lower) compared to the unparameterized Gumbel-Frank  
2 structure. Therefore, the Gumbel-Frank copula with parameterized dependence was selected in our  
3 study.

4

## 5 **4.2 Estimation Results**

6 In this section, we present the results of the Gumbel-Frank copula model with parametrized  
7 dependency. Table 3 and Table 4 show the crash type component and injury severity component  
8 respectively. The copula parameters are presented in the last row panel of Table 4. For ease of  
9 presentation, the crash type component and injury severity component are discussed separately.  
10 The results of the independent models are shown in Table A.2 and Table A.3 in the Appendix  
11 section.

12

### 13 *Crash Type Component*

14 The coefficients in the crash type component (Table 3) represent the effects of exogenous variables  
15 on each crash type relative to the base category head-on crash type. A positive (negative) sign of a  
16 coefficient for a crash type in Table 3 signifies that an increase in the variable is likely to result in  
17 a higher (lower) likelihood of that crash type relative to the head-on crash type. The impacts of the  
18 variables are discussed by variable characteristics separately in the following sections.

1 **Table 3: MNL (Crash Type) Model Component in the Gumbel-Frank Copula Model with Parameterized Dependence (Base:**  
 2 **Head-on)**

Variables	Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Constant	-0.623	-15.609	-4.074	-27.233	-1.425	-31.575	-1.067	-19.371	-1.991	-26.618
<i>Driver Characteristics</i>										
DUI suspicion (Base: Not DUI suspect)										
DUI suspect*	--	--	--	--	--	--	0.239	5.320	--	--
DUI suspect* nYear4	--	--	--	--	--	--	-0.308	-4.903	--	--
<i>Vehicle Characteristics</i>										
Vehicle type (Base: 4-wheeler light vehicles)										
Bus	--	--	--	--	--	--	0.023	2.930	--	--
Truck	--	--	--	--	--	--	-0.050	-5.519	0.133	2.068
Truck*nYear4	--	--	--	--	--	--	--	--	-0.282	-1.889
Truck*nYear7	--	--	--	--	--	--	--	--	0.345	1.956
Truck*nYear10	--	--	--	--	--	--	--	--	-0.281	-2.182
Motorcycle	--	--	--	--	--	--	-0.672	-5.737	-0.086	-3.816
Motorcycle*nYear4	--	--	--	--	--	--	0.688	4.442	--	--

Variables	Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Motorized 3-wheelers	-0.058	-5.209	-0.108	-2.154	-0.052	-3.517	-0.068	-4.849	-0.072	-3.219
Informal vehicles	0.017	1.740	--	--	0.025	2.120	--	--	--	--
Vehicle maneuvering (Base: Straight and others)										
Overtaking	--	--	--	--	0.301	4.325	--	--	--	--
Overtaking*nYear4	--	--	--	--	-0.333	-3.545	--	--	--	--
Crossing	--	--	0.129	4.198	--	--	--	--	--	--
Turning	--	--	--	--	--	--	0.028	2.352	--	--
Fitness certificate (Base: Not present)										
Present	-0.012	-2.423	-0.043	-2.584	--	--	--	--	-0.028	-2.893
<b><i>Roadway Characteristics</i></b>										
Location type (Base: Rural area)										
Urban area	0.169	5.215	--	--	--	--	-0.082	-2.869	--	--
Urban area*nYear4	-0.186	-4.231	--	--	--	--	--	--	--	--
Urban area*nYear7	--	--	--	--	--	--	0.290	3.003	--	--
Urban area*nYear10	--	--	--	--	--	--	-0.549	-3.693	--	--
Urban area*nYear13	--	--	--	--	--	--	0.397	2.129	--	--



Variables	Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Road class (Base: National highways)										
Feeder roads	0.029	3.156	--	--	--	--	0.296	7.109	--	--
Feeder roads*nYear4	--	--	--	--	--	--	-0.380	-6.202	--	--
Village roads	--	--	--	--	--	--	0.047	4.020	-0.076	-2.559
City roads	0.027	3.037	0.569	6.089	--	--	0.048	3.175	--	--
City roads*nYear4	--	--	-0.611	-4.825	--	--	--	--	--	--
Presence of divider (Base: Not divided)										
Divided	0.533	13.080	0.430	4.543	0.179	3.286	--	--	0.071	5.301
Divided*nYear4	-0.579	-10.266	-0.453	-3.508	-0.170	-2.288	--	--	--	--
Road geometry (Base: Straight and slope)										
Curve section	-0.073	-6.106	--	--	--	--	--	--	-0.116	-3.886
Facility type (Base: Not at intersection)										
Intersection	--	--	0.542	7.274	0.263	6.991	--	--	0.027	2.657
Intersection*nYear4	--	--	-0.597	-5.903	-0.301	-5.961	--	--	--	--
Surface quality (Base: Good)										
Rough	--	--	--	--	--	--	0.057	3.862	--	--

Variables	Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Road features (Base: None/narrowing/restricted)										
Bridge and culvert	--	--	--	--	--	--	0.041	2.471	--	--
<i>Environmental and Weather Characteristics</i>										
Time of the day (Base: Other than late night))										
Late night	--	--	--	--	--	--	0.338	9.063	0.052	4.966
Late night*nYear4	--	--	--	--	--	--	-0.423	-7.952	--	--
Light condition (Base: Daylight, dawn and dusk)										
Night lighted	0.026	2.425	--	--	--	--	--	--	0.040	2.252
Night not lighted	--	--	--	--	--	--	0.033	3.077	0.188	2.807
Night not lighted*nYear4	--	--	--	--	--	--	--	--	-0.201	-2.114

1 Note: “\*” Represents the effect of the variable for the base year 2000 (nYear1\*DUI suspect). If the interaction of a variable becomes significant for the base year  
2 only, then the slope of the effect of that variable will not change for the rest of the years which implies that the variable impact is linear. For this variable, the  
3 coefficient (estimate for “nYear1\*variable”) is the mean effect for the base year, for the second year the mean effect will be 2\*coefficient, for the third year the  
4 mean effect will be 3\*coefficient, and so on; “--” Represents the variables are not significant at 90% confidence level.

1 Driver characteristics

2 Among driver characteristics considered, only driving under influence (drug and alcohol) variable  
3 offers a significant impact in the crash type model. Specifically, we observe that a driver under  
4 influence of drug and alcohol is likely to be involved in a single-vehicle crash. The finding might  
5 appear counter-intuitive on first glance. Given that we are considering crash type conditional on a  
6 crash, the finding implies that driving under the influence is likely to increase the probability of  
7 single vehicle crashes relative to other crash types. This could be because drivers under the  
8 influence of drugs and alcohol are less alert, likely to react slower and have a lower ability to  
9 control the vehicles. Similar findings are also reported in many studies from developed countries  
10 (Bham et al., 2012; Hyun et al., 2021). The results also show that the effect of this variable is not  
11 stable over the years and the negative sign of the variable “DUI suspect\*nYear4” implies that the  
12 slope of the impact reduces in the 4<sup>th</sup> year (in the year 2003). The net impact of the variable for the  
13 year 2000 is 0.239 while the impact for 2003 is 0.648 ( $0.239*4-0.308$ ). As we discussed earlier,  
14 we tested for varying impact in a piece-wise linear manner and for this variable, we found only  
15 one change in the slope.

16

17 Vehicle characteristics

18 Several vehicle characteristics were tested in the model. With regards to vehicle type, buses show  
19 a positive impact on single-vehicle crashes compared to 4-wheeler light vehicles. The results can  
20 be explained by driver’s fatigue and lax regulation around late-night driving and break  
21 requirements for bus drivers in developing countries. Trucks are found to be associated with  
22 reduced propensity for single-vehicle crashes and higher propensity for hit-parked-vehicle crashes.  
23 On-street and roadside truck parking/loading/unloading activities, truck parking along the medians

1 and dividers, particularly on national and regional highways are common in Bangladesh and are  
2 likely to be responsible for higher involvement of trucks in hit-parked-vehicle crashes. For hit-  
3 parked-vehicle crashes, the impact of the truck variable is found to be unstable over the years. For  
4 this crash type, we found changes in the slope of the truck impact in the years 2003, 2006 and  
5 2009. Motorcycles are found to be less likely to be involved in single-vehicle and hit-parked-  
6 vehicle crashes compared to 4-wheeler light vehicles. For single-vehicle crashes, this variable  
7 positively changes the slope of the impact in the year 2003. Motorized 3-wheelers have negative  
8 effects on all crash types compared to 4-wheeler light vehicles. The results also show that informal  
9 vehicles increase the likelihood of rear-end and sideswipe crash types. These informal vehicles are  
10 mostly locally built vehicles that are likely to offer substandard safety features and are operated at  
11 lower speed. The differential speeds of these vehicles and other high-speed vehicles might trigger  
12 the rear-end and sideswipe crash types.

13 As expected, with respect to the vehicle maneuvering, the findings indicate that overtaking  
14 increases the sideswipe crash type and crossing increases the right-angle crash type while turning  
15 increases the single-vehicle crashes compared to the straight and other maneuvers. However, the  
16 slope of the effect of overtaking maneuvering is found to be reduced in the year 2003 for sideswipe  
17 crashes. The change cannot be attributed to something definitively. The change can possibly be  
18 attributed to several road safety interventions in Bangladesh including but not limited to,  
19 dissemination of driver education, road geometric and operational improvement of the roads in  
20 this time frame and possible advocacy efforts of Accident Research Center. In addition, the variable  
21 representing fitness certificate (associated with vehicle fitness for roadway usage) presents a  
22 negative impact on the likelihood of rear-end, right-angle and hit-parked-vehicle crashes.

23

1 Roadway characteristics

2 The impact of the location type indicates that with respect to rural area, crashes in urban areas are  
3 more likely to be rear-end crashes and less likely to be single-vehicle crashes. These findings are  
4 intuitive as divided roadways, higher intersection density, and stop-and-go situations in congested  
5 flows are some common features of urban areas of Bangladesh. The results also indicate that the  
6 effect of the urban area variable exhibits temporal instability for both crash types. For rear-end  
7 crashes, the impact decreases in the year 2003 while for single-vehicle crashes, the impact changes  
8 in the years 2006, 2009 and 2012.

9         With respect to road class, the results show that feeder roads have a higher likelihood of  
10 being rear-end and single-vehicle crash types compared to the national and regional highways.  
11 However, the effect on the single-vehicle crash type is not stable over time and the effect changes  
12 in the year 2003. The village roads also increase the likelihood of single-vehicle crashes while  
13 decrease the likelihood of hit-parked-vehicle crashes. City roads increase the likelihood of rear-  
14 end, right-angle and single-vehicle crashes compared to national highways while showing  
15 temporal instability for right-angle crashes. These results can be attributed to design deficiencies,  
16 narrower roads, and roadside linear settlements along the roadways across the country.

17         The results also suggest that divided roads have a higher likelihood of all crash types,  
18 except for single-vehicle crashes. Further, the slope of the impact is found to be lower in the year  
19 2003 for rear-end, right-angle and sideswipe crashes. Crashes that occur on curve sections are less  
20 likely to be rear-end and hit-parked-vehicle crash types compared to straight and slope/grade  
21 sections. This is expected as drivers are more likely to stop and park the vehicles on straight section  
22 compared to curve section, thus, likelihood of being rear-end and hit-parked-vehicle crash types is

1 lower. All these findings are in general consistent with many studies (Bham et al., 2012; Intini et  
2 al., 2020; Ye et al., 2008).

3 With respect to road facility type, crashes that occur at intersections are more likely to be  
4 right-angle, sideswipe and hit-parked-vehicle types compared to non-intersection locations (as  
5 found in Pervaz et al., 2024; Rana et al., 2010). This is quite expected as intersections have more  
6 crossing, passenger boarding/alighting, parking, and vendor activities compared to non-  
7 intersections across the country. The results also indicate that the effect of this variable is not stable  
8 over time on the right-angle and sideswipe crashes and the effect decreases starting from the year  
9 2003.

10 With regards to surface quality, crashes that occur on the rough surface are more likely to  
11 be single-vehicle crashes. Similarly, crashes on bridge-culverts are more likely to be single-vehicle  
12 crashes.

13

#### 14 Environmental and weather characteristics

15 With respect to the time of the day, late nighttime shows a positive impact on single-vehicle and  
16 hit-parked-vehicle crashes compared to other times of the day (see Intini et al., 2020 for similar  
17 finding). This might be attributable to lower visibility and driver impairment due to fatigue at late  
18 night. For single-vehicle crashes, the slope of the effect is found to be reduced in the year 2003.

19 The results indicate that nighttime even in the presence of light has a positive impact on  
20 rear-end and hit-parked-vehicle crashes while nighttime without lighting has a positive impact on  
21 single-vehicle and hit-parked-vehicle crashes compared to the daylight condition. The results are  
22 intuitive and might be attributed to the reduced visibility during these conditions (Bham et al.,  
23 2012). For hit-parked-vehicle crashes, the variable shows temporal change in the year 2003.

1 *Injury Severity Component*

2 The results of the severity component of the joint model are presented in Table 4. A positive  
3 (negative) sign for a coefficient in Table 4 signifies that an increase in the variable is likely to result  
4 in higher (lower) severity in the crash type. The impacts of the variables are discussed in the  
5 following sections.

6

7 Driver characteristics

8 With respect to driver characteristics, speeding increases the severity of drivers in head-on and hit-  
9 parked-vehicle crashes. This finding is very much expected and has been established in safety  
10 literature for both developed and developing country contexts (Abdel-Aty, 2003; Abegaz et al.,  
11 2014; Paleti et al., 2010). For head-on crashes, the variable changes the slope of the effect in the  
12 year 2006.

13

14 Vehicle characteristics

15 Vehicle type variables significantly impact driver severity. The results indicate that bus drivers are  
16 likely to sustain a less severe injury in all crash types except right-angle compared to the drivers  
17 of 4-wheeler light vehicles. However, the slope of the effect is found to be higher from the year  
18 2003 for rear-end and sideswipe crashes. Trucks have a negative effect on the driver injury severity  
19 for all crash types except right-angle (as found in Rana et al., 2010). The reduced severity  
20 propensity can be attributed to the vehicle size, capacity against structural deformation and  
21 stability. Further, the variable shows temporally unstable effect for the years 2003 and 2006 for  
22 head-on crashes while for the year 2003 for rear-end crashes.

23

1 **Table 4: GOL (Injury Severity) Model Component in the Gumbel-Frank Copula Model with Parameterized Dependence**

Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Threshold between NI-SI	0.491	7.016	2.292	19.939	1.697	4.630	-0.935	-2.761	1.619	16.838	1.514	8.367
Threshold between SI-GI	0.896	15.193	2.705	9.639	1.936	2.993	-0.578	-5.609	2.338	3.679	1.966	4.663
Threshold between GI-FI	1.779	2.581	3.875	2.230	3.886	2.734	0.007	2.707	3.001	3.313	2.758	1.527
<i>Driver Characteristics</i>												
Speeding related (Base: Not speeding)												
Speeding*	0.075	4.010	--	--	--	--	--	--	--	--	0.045	1.752
Speeding *nYear7	-0.130	-3.539	--	--	--	--	--	--	--	--	--	--
<i>Vehicle Characteristics</i>												
Vehicle type (Base: 4-wheeler light vehicles)												
Bus	-0.100	-7.565	-0.976	-5.881	--	--	-0.290	-2.877	-0.055	-2.752	-0.136	-2.687
Bus*nYear4	--	--	1.125	5.147	--	--	0.327	2.499	--	--	--	--
Truck	-0.475	-6.288	-0.434	-4.308	--	--	-0.096	-3.151	-0.044	-1.860	-0.131	-3.694
Truck*nYear4	0.709	4.385	0.428	3.158	--	--	--	--	--	--	--	--
Truck*nYear7	-0.253	-2.184	--	--	--	--	--	--	--	--	--	--
Pick-up	--	--	--	--	--	--	0.044	1.775	--	--	--	--



Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Motorcycle	0.752	11.415	1.269	15.011	0.438	8.095	0.143	6.501	0.952	6.134	0.182	3.863
Motorcycle*nYear4	-0.722	-8.099	-1.602	-8.639	--	--	--	--	-1.138	-5.209	--	--
Motorcycle*nYear7	--	--	0.428	2.878	--	--	--	--	--	--	--	--
Motorized 3-wheelers	0.094	6.853	0.141	5.864	--	--	0.052	2.732	--	--	0.120	3.104
Informal vehicles	0.061	4.022	0.733	5.936	--	--	0.036	2.034	--	--	--	--
Informal vehicles*nYear4	--	--	-0.870	-5.159	--	--	--	--	--	--	--	--
Informal vehicles*nYear16	--	--	1.373	2.127	--	--	--	--	--	--	--	--
<i>Threshold between SI-GI</i>	--	--	--	--	--	--	-0.315	-1.867	--	--	--	--
<i>Threshold between GI-FI</i>			-0.063	-2.690	--	--	--	--	--	--	--	--
Vehicle maneuvering (Base: Straight and others)												
Turning	--	--	--	--	--	--	--	--	0.098	4.467	--	--
Fitness certificate (Base: Not present)												
Present	--	--	--	--	-0.175	-2.668	--	--	--	--	--	--
<b><i>Roadway Characteristics</i></b>												
Location type (Base: Rural area)												

Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Urban area	-0.026	-2.324	--	--	--	--	-0.025	-2.132	--	--	--	--
Road class (Base: National highways)												
Regional highways	-0.057	-4.972	--	--	--	--	--	--	--	--	--	--
Feeder roads	-0.079	-5.314	-0.037	-1.694	--	--	--	--	--	--	--	--
Village roads	-0.103	-6.536	-0.111	-2.661	--	--	--	--	--	--	--	--
City roads	-0.060	-3.324	-0.041	-2.563	-0.127	-1.822	--	--	--	--	--	--
Surface quality (Base: Good)												
Rough	-0.065	-2.483	--	--	--	--	--	--	--	--	--	--
<b><i>Environmental and Weather Characteristics</i></b>												
Time of the day (Base: Other than late night)												
Late night	0.020	1.685	0.032	2.017	--	--	--	--	--	--	0.223	3.595
Late night*nYear7	--	--	--	--	--	--	--	--	--	--	-0.254	-1.989
<i>Threshold between GI-FI</i>	-0.045	-2.740	--	--	--	--	--	--	--	--	--	--
Season of the year (Base: Summer)												
Rainy	--	--	--	--	--	--	--	--	0.037	1.827	--	--
Light condition (Base: Daylight, dawn/dusk)												

Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Night lighted	--	--	--	--	0.211	2.212	--	--	--	--	--	--
Night not lighted	--	--	--	--	--	--	--	--	0.042	1.929	--	--
Weather condition (Base: Clear)												
Rain	0.067	3.997	--	--	--	--	--	--	--	--	--	--
Fog and wind	0.059	2.522	--	--	--	--	--	--	0.119	2.530	--	--
<i>Copula Parameters</i>												
Copula type	None		Gumbel		Gumbel		Frank		None		None	
Constant	--	--	1.232	24.949	1.007	88.976	-6.786	-3.073	--	--	--	--
Divided roads	--	--	1.198	2.201	--	--	--	--	--	--	--	--

1 Note: “\*” Represents the effect of the variable for the base year 2000 (nYear1\*Speeding). If the interaction of a variable becomes significant for the base year only,  
2 then the slope of the effect of that variable will not change for the rest of the years which implies that the variable impact is linear. For this variable, the coefficient  
3 (estimate for “nYear1\*variable”) is the mean effect for the base year, for the second year the mean effect will be 2\*coefficient, for the third year the mean effect  
4 will be 3\*coefficient, and so on; “--” Represents the variables are not significant at 90% confidence level; NI=No injury, SI=Simple injury, GI=Grievous injury,  
5 FI=Fatal injury.

1 The results further indicate that drivers in pick-ups are likely to sustain severe injuries when  
2 involved in sideswipe crashes. This finding is interestingly different than the effect reported in the  
3 research for developed countries (Marcoux et al., 2018; Yasmin et al., 2014a). Further, motorcycle  
4 drivers are likely to sustain severe injuries for all crash types (Ye et al., 2008). However, the  
5 variable shows temporal instability for head-on, rear-end and single-vehicle crashes. Motorized 3-  
6 wheeler drivers are likely to experience higher risk for severity for all crash types except right-  
7 angle and single-vehicle crashes. The informal vehicle drivers are prone to increased severity  
8 propensity for head-on, rear-end and sideswipe crash types. The variable shows temporally varying  
9 effect for rear-end crashes. The results also show that informal vehicles influence the threshold  
10 between grievous and fatal injury for rear-end crashes and the threshold between simple and  
11 grievous injury for sideswipe crashes. The negative signs on the thresholds indicate that this  
12 variable further exacerbates the driver injury severity in these crash types. All these findings could  
13 be attributable to lower resisting capacity, lack of safety features such as seat belt, higher exposure  
14 and vulnerability of drivers compared to 4-wheeler light vehicles (Abegaz et al., 2014; Anowar et  
15 al., 2014).

16 With respect to vehicle maneuvers, turning movement increases the likelihood of driver  
17 injury severity for single-vehicle crashes compared to other maneuvers. Further, vehicles with  
18 proper fitness decrease the severity in right-angle crashes.

19

## 20 Roadway characteristics

21 Drivers injured in urban areas are likely to sustain less severe injuries in head-on and sideswipe  
22 crashes compared to the rural areas. This is plausible as operating speed is lower in urban areas of  
23 Bangladesh. The similar effect was found in developed countries (Abdel-Aty, 2003).

1           The results also indicate that crashes on regional highways are associated with lower  
2 severity for head-on crashes compared to the national highways. Feeder roads, village roads and  
3 city roads present reduced severity risk for head-on and rear-end crashes compared to national  
4 highways. City roads are also associated with lower severity for right-angle crashes. All these  
5 findings could be associated with lower operating speed in the regional, feeder, village and city  
6 roads compared to national highways. Similar findings were reported in previous studies (Anowar  
7 et al., 2014; Kamruzzaman et al., 2014; Rahman et al., 2021).

8           The results also show that crashes on rough surfaces decrease the driver injury severity in  
9 a head-on crash compared to good and smooth surface conditions.

10

#### 11 Environmental and weather characteristics

12       With regards to the time of the day, crashes during late nighttime period are likely to increase  
13 driver injury severity risk for head-on, rear-end and hit-parked-vehicle crashes. The variable shows  
14 temporally heterogenous effect for hit-parked-vehicle crashes. The results also indicate that late  
15 night variable shifts the threshold between grievous and fatal injury towards left further  
16 exacerbating the driver injury severity in head-on crashes. These results are intuitive as the volume  
17 of traffic is likely low and operating speeds are likely higher during this period (see Barua and Tay,  
18 2010; Marcoux et al., 2018; Pervaz et al., 2023; Yasmin et al., 2014a for similar results on severity).  
19 Among the seasonal effects, rainy season increases the likelihood of severity for single-vehicle  
20 crashes.

21       Crashes occurring during nighttime even with light increases the severity of right-angle  
22 crashes while absence of light increases the likelihood of the driver injury severity for single-  
23 vehicle crashes.

1 With respect to weather factors, findings indicate that rainy and foggy conditions increase  
2 the likelihood of severe crashes in head-on crashes while foggy condition increases the severity  
3 for single-vehicle crashes compared to clear weather conditions (as found in Anowar et al., 2014;  
4 Yasmin et al., 2014a). This could be due to the reduced visibility, longer reaction time, and slippery  
5 road surface in these weather conditions.


### 6 7 **4.3 Dependence Effect**

8 The estimated Gumbel-Frank copula-based joint MNL-GOL model provides the best fit while  
9 incorporating the correlation between the crash types and injury severity outcome of the drivers.  
10 An examination of the copula parameters presented in the last row panel of Table 4 highlights the  
11 presence of common unobserved factors affecting crash type and injury severity for rear-end, right-  
12 angle and sideswipe crash types. Our study did not find any statistically significant impact of  
13 dependency parameter for head-on and hit-parked-vehicle crash types (please note that the  
14 dependence for single-vehicle crashes was found significant in FGM copula, however we selected  
15 the Gumbel-Frank copula model due to the best model fit). The positive correlations for rear-end  
16 and right-angle crash types indicate that the unobserved factors that increase the likelihood of rear-  
17 end, and right-angle crash types also increase the injury severity of the drivers involved in those  
18 crashes. On the other hand, the negative sign of copula parameter for sideswipe crash type indicates  
19 that the unobserved factors that increase the likelihood of sideswipe crash type decrease the injury  
20 severity of the drivers involved in this crash type. We attempted to parameterize the dependency  
21 as a function of several exogenous variables in our model system. For rear-end crash type, the  
22 copula dependency is characterized by an additional exogenous variable – divided roads. The  
23 variables added in the dependency structure allow for dependency to vary across the dataset.

#### 1   **4.4   Predictive Performance of the Model**

2   To demonstrate the performance of the developed model, we undertake a validation exercise using  
3   the holdout dataset. The exercise consists of two steps. First, we compare the performance of the  
4   developed copula model with the independent model by using BIC values. In this step, we  
5   randomly divided the 25,261 observations of the holdout dataset into five distinct validation  
6   datasets (four datasets with 5,000 observations each and a dataset with 5,261 observations). The  
7   BIC (LL) values of the selected copula model in the validation datasets are 22,937.33 (-10,808.58),  
8   22,719.18 (-10,699.51), 22,740.56 (-10,710.20), 22,867.32 (-10,773.58), 24,073.99 (-11,372.97)  
9   and 23,067.71 (-10,872.97) respectively while the values for the independent model are 22,943.55  
10   (-10,811.70), 22,719.10 (-10,699.47), 22,753.96 (-10,716.90), 22,888.17 (-10,784.00), 24,105.79  
11   (-11,388.87) and 23,082.15 (-10,880.19). These values highlight that our developed model shows  
12   superior performance (lower BIC) in the four datasets while a very close performance in a dataset.  
13   In the second exercise, we compare the observed aggregate shares with the predicted shares across  
14   crash type component and injury severity component as shown in Fig. 1.

15           From the figure, it is clear that the predictions offered by our developed model are very  
16   close to observed shares across all comparisons.

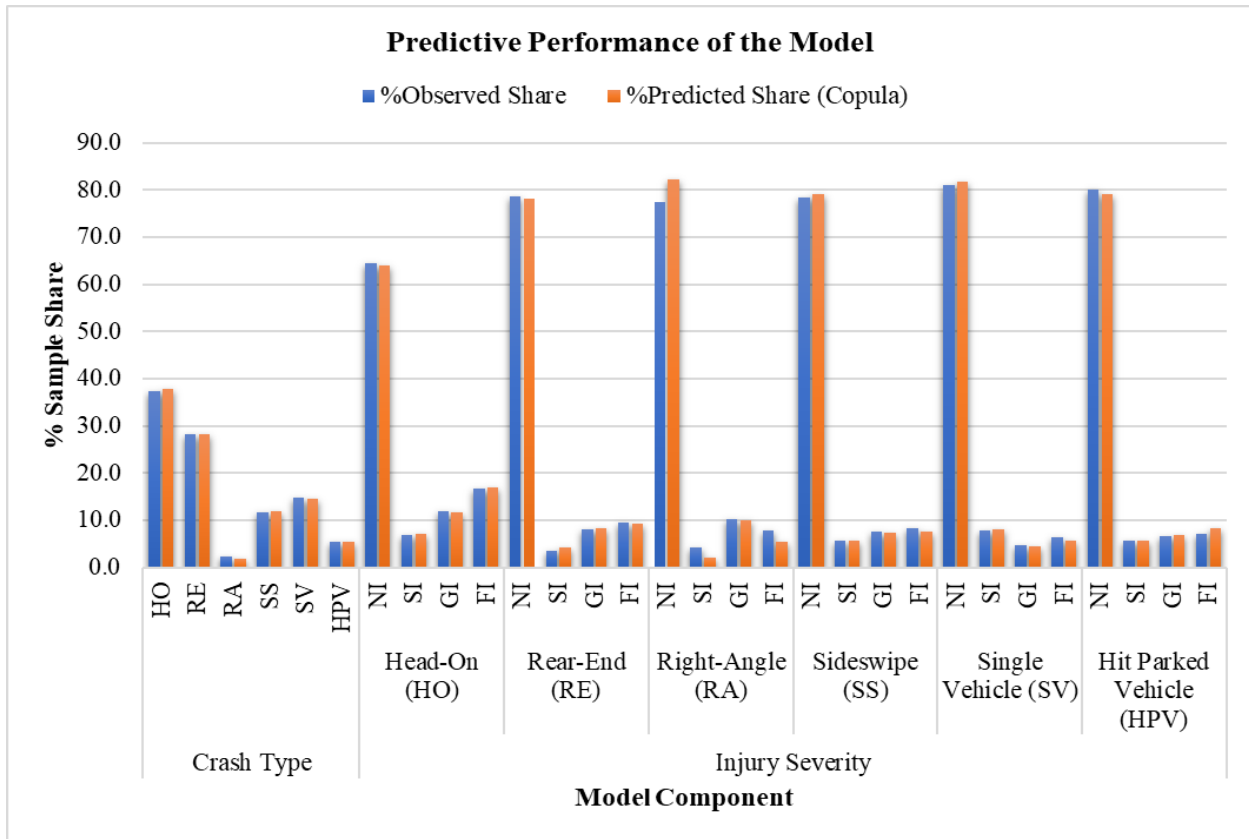

1  
2 **Fig. 1: Predictive performance of the Gumbel-Frank copula model with parameterized**  
3 **dependency**

4  
5 **4.5 Elasticity Analysis**

6 The model results shown in Table 3 and Table 4 do not provide the true magnitude of the effects  
7 of the exogenous variables on the likelihood of crash type as well as driver injury severity in the  
8 crashes. To illustrate the true magnitude of the variables impact, we compute the aggregate level  
9 “elasticity effects” for the exogenous variables following the methodology formulated by Eluru  
10 and Bhat (2007). The procedure involves computing the aggregate probability for each crash type  
11 and severity while modifying the exogenous variable of interest. For any indicator exogenous  
12 variable, the elasticity is computed by changing the value of the variable to one for the subsample  
13 of observations for which the variable takes a value of zero and to zero for the subsample of



1 observations for which the variable takes a value of one. Subsequently, the shifts in expected  
2 aggregate shares in the two subsamples are summed after reversing the sign of the shifts in the  
3 second subsample (please see Eluru and Bhat, 2007; Marcoux et al., 2024 for a detailed  
4 discussion). The computed elasticity results for crash type component and severity component are  
5 presented in Table 5 and Table 6, respectively. The reader would note that for the severity  
6 component, we present the elasticity effects only for the lowest and highest injury severity levels  
7 (no-injury and fatal injury) across all crash types to conserve on space.

8           Table 5 shows the elasticity results of the variables for the crash type component. For this  
9 component, the computed elasticity can be interpreted as the percentage change in the likelihood  
10 of a crash type due to a change in the exogenous variable of interest. For instance, the aggregate  
11 elasticity 32.11% for DUI suspect variable for single-vehicle crash type can be interpreted as the  
12 likelihood of a driver being involved in a single-vehicle crash under the influence of drug/alcohol  
13 is about 32.11% higher than the likelihood of a driver being involved in single-vehicle crash when  
14 he/she is not under the influence of drug/alcohol (while other characteristics remain unchanged).  
15 The effects of all the variables presented in Table 5 can be interpreted in a similar manner for crash  
16 type component. Alternatively, Table 6 shows the elasticity results of the variables on driver injury  
17 severity component. For this component, the computed elasticity can be interpreted as the  
18 percentage change in the likelihood of an injury severity level for a crash type due to a change in  
19 the exogenous variable of interest. For instance, the aggregate elasticity 14.49% for speeding  
20 variable for fatal injury in a head-on crash can be interpreted as the likelihood of a speeding driver  
21 being fatally injured in a head-on crash is about 14.49% higher than the likelihood of a non-  
22 speeding driver being fatally injured while other characteristics being equal. The effects of all the  
23 variables presented in Table 6 can be interpreted in a similar manner for injury severity component.

1           Several insights can be drawn from the elasticity results presented in Table 5 and Table 6.  
2 First, the magnitudes of the elasticity for a variable are different across crash types and severities  
3 which reinforces the importance of conducting crash type specific injury severity analysis. Second,  
4 the most significant variables positively affecting crash types are city road, crossing maneuver,  
5 intersection location, divided road, overtaking maneuver, late nighttime driving, driving in dark  
6 unlighted conditions, rough road surface, driving under the influence of alcohol and drug and  
7 motorized three-wheeler vehicles (as shown in Table 5). Third, the most significant variables  
8 increasing fatal injury likelihood are informal vehicles, motorcycles, motorized three-wheelers,  
9 foggy and windy weather, turning movement, late nighttime driving, nighttime irrespective of  
10 lights, and rainy weather (as shown in Table 6). Fourth, roadway, vehicle, driver and road  
11 environmental attributes affect the crash type component while vehicle and road environmental  
12 attributes affect the injury severity component significantly.

13           The insights from the elasticity results can contribute to understanding the road safety  
14 situation and facilitate adopting appropriate interventions to improve road safety in the country.  
15 Road geometric improvement, installation of effective traffic control systems, intersection  
16 improvement policies such as providing dedicated/exclusive turning lanes, signal and signage  
17 improvement, installation of resting facilities for nighttime drivers, roadway lighting improvement  
18 schemes, maintaining safety standards and fitness of the vehicles, continuous monitoring and  
19 targeted enforcement, effective real time messaging and advanced warning systems, improvement  
20 of driving behavior for yielding to the signals and signages, improvement of road user behavior  
21 through large-scale road safety awareness campaigns, and traffic education could be suitable  
22 solutions for addressing the crash types and driver injury severities in the country.

1 **Table 5: Results of the Elasticity Analysis for Crash Type Component**

<b>Variables</b>	<b>%Head-on</b>	<b>%Rear-end</b>	<b>%Right-angle</b>	<b>%Sideswipe</b>	<b>%Single-vehicle</b>	<b>%Hit-parked-vehicle</b>
<i><b>Driver Characteristics</b></i>						
DUI suspicion (Base: Not DUI suspect)						
DUI suspect*	-5.87	-5.17	-4.72	-5.55	32.11	-6.20
<i><b>Vehicle Characteristics</b></i>						
Vehicle type (Base: 4-wheeler light vehicles)						
Bus	-2.52	-2.05	-1.64	-2.45	13.40	-2.47
Truck	3.50	2.58	1.96	3.36	-27.54	28.71
Motorcycle	19.31	16.47	13.58	18.65	-83.89	-34.81
Motorized 3-wheelers	28.09	-14.22	-34.26	-13.04	-20.64	-23.75
Informal vehicles	-5.62	6.04	-6.16	13.43	-4.89	-5.86
Vehicle maneuvering (Base: Straight and others)						
Overtaking	-10.13	-9.83	-11.39	74.44	-9.95	-9.93
Crossing	-2.33	-3.55	138.98	-3.08	-2.02	-2.78
Turning	-3.22	-2.63	-2.10	-3.14	17.16	-3.17
Fitness certificate (Base: Not present)						

<b>Variables</b>	<b>%Head-on</b>	<b>%Rear-end</b>	<b>%Right-angle</b>	<b>%Sideswipe</b>	<b>%Single-vehicle</b>	<b>%Hit-parked-vehicle</b>
Present	3.94	-4.00	-24.09	4.35	3.54	-16.81
<b><i>Roadway Characteristics</i></b>						
Location type (Base: Rural area)						
Urban area	-6.10	30.91	-13.06	-6.88	-33.23	-6.86
Road class (Base: National highways)						
Feeder roads	-12.98	7.69	-12.95	-13.06	35.82	-13.96
Village roads	-3.47	-2.42	-1.82	-3.24	32.54	-43.33
City roads	-13.29	4.85	151.03	-14.39	21.62	-13.97
Presence of divider (Base: Not divided)						
Divided	-45.59	82.70	48.83	2.74	-44.54	0.89
Road geometry (Base: Straight and slope)						
Curve section	16.07	-28.41	20.59	17.60	14.32	-48.27
Facility type (Base: Not at intersection)						
Intersection	-10.25	-11.54	122.50	48.19	-10.14	9.30
Surface quality (Base: Good)						
Rough	-7.08	-5.80	-4.63	-6.90	37.71	-6.96

<b>Variables</b>	<b>%Head-on</b>	<b>%Rear-end</b>	<b>%Right-angle</b>	<b>%Sideswipe</b>	<b>%Single-vehicle</b>	<b>%Hit-parked-vehicle</b>
Road features (Base: None/narrowing/restricted)						
Bridge and culvert	-4.82	-3.94	-3.15	-4.69	25.66	-4.73
<b><i>Environmental and Weather Characteristics</i></b>						
Time of the day (Base: Other than late night)						
Late night	-11.72	-10.53	-9.31	-11.38	48.70	30.20
Light condition (Base: Daylight, dawn and dusk)						
Night lighted	-6.80	10.96	-7.73	-7.25	-6.05	24.92
Night not lighted	-6.58	-5.91	-5.09	-6.51	17.10	44.42

1

2

1 **Table 6: Results of the Elasticity Analysis for Injury Severity Component**

Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal
<i>Driver Characteristics</i>												
Speeding related (Base: Not speeding)												
Speeding*	-6.28	14.49	--	--	--	--	--	--	--	--	-5.72	27.36
<i>Vehicle Characteristics</i>												
Vehicle type (Base: 4-wheeler light vehicles)												
Bus	21.16	-47.58	12.85	-83.99	--	--	41.47	-30.73	5.93	-31.81	14.93	-63.38
Truck	24.11	-52.57	9.81	-69.77	--	--	45.10	-33.41	4.65	-25.01	16.28	-73.27
Pick-up	--	--	--	--	--	--	-18.30	15.11	--	--	--	--
Motorcycle	-71.54	239.29	-38.01	295.35	-48.97	402.21	-52.61	49.38	-47.76	406.01	-30.60	181.42
Motorized 3-wheelers	-22.69	59.37	-11.45	114.20	--	--	-21.39	17.78	--	--	-18.85	100.87
Informal vehicles	-14.21	36.59	-22.49	277.00	--	--	-15.24	26.32	--	--	--	--
Vehicle maneuvering (Base: Straight and others)												
Turning	--	--	--	--	--	--	--	--	-13.41	81.72	--	--

Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal
Fitness certificate (Base: Not present)												
Present	--	--	--	--	10.27	-68.90	--	--	--	--	--	--
<i>Roadway Characteristics</i>												
Location type (Base: Rural area)												
Urban area	5.62	-13.65	--	--	--	--	11.11	-8.60	--	--	--	--
Road class (Base: National highways)												
Regional highways	11.90	-28.38	--	--	--	--	--	--	--	--	--	--
Feeder roads	15.90	-37.08	2.40	-21.76	--	--	--	--	--	--	--	--
Village roads	19.89	-45.24	6.49	-53.40	--	--	--	--	--	--	--	--
City roads	12.40	-29.08	2.71	-24.93	7.71	-57.50	--	--	--	--	--	--
Surface quality (Base: Good)												
Rough	13.24	-30.66	--	--	--	--	--	--	--	--	--	--
<i>Environmental and Weather Characteristics</i>												
Time of the day (Base: Other than late night)												
Late night	-4.52	30.67	-2.24	21.66	--	--	--	--	--	--	-12.14	53.44

Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal	%No-Injury	%Fatal
Season of the year (Base: Summer)												
Rainy	--	--	--	--	--	--	--	--	-4.36	24.75	--	--
Light condition (Base: Daylight, dawn/dusk)												
Night lighted	--	--	--	--	-15.16	90.42	--	--	--	--	--	--
Night not lighted									-5.10	29.14		
Weather condition (Base: Clear)												
Rain	-15.61	41.32	--	--	--	--	--	--	--	--	--	--
Fog and wind	-1.27	3.37	--	--	--	--	--	--	-17.16	113.95	--	--

1



## 1 5 CONCLUSIONS

2 Road traffic crashes disproportionately affect low and middle-income countries of the world. The  
3 unique driver behavior, roadway characteristics, traffic composition, traffic flow, and roadway  
4 environment contribute to a fundamentally different system compared to the systems in developed  
5 countries. A majority of earlier research examining data from Bangladesh implicitly assumed the  
6 entire parameter space to remain the same across the population while completely disregarding  
7 temporal stability of parameters over time. To address these critical modeling issues, the current  
8 study proposes a joint framework that explicitly models crash type outcomes while allowing for a  
9 crash type specific injury severity profile. The approach takes the form of a copula-based temporal  
10 multinomial (MNL)-generalized ordered logit (GOL) that allows us to accommodate for the  
11 influence of observed and unobserved factors affecting crash type and severity. We also introduce  
12 a novel spline approach for incorporating parameter specific variation over time. These newly  
13 introduced variables can directly be accommodated within any methodological framework. The  
14 study examines six copula structures - Gaussian, Farlie-Gumbel-Morgenstern (FGM), Frank,  
15 Clayton, Joe, and Gumbel to consider a wide range of dependency structures. We employ the  
16 Bayesian Information Criterion (BIC) to determine the best model among all copula models. We  
17 also allow for dependency parameter for crash type and injury severity outcomes to vary across  
18 the dataset. The empirical analysis was conducted using police reported crash data drawn from  
19 Bangladesh for the years 2000 to 2015 focusing on injury severity sustained by drivers in motor  
20 vehicle crashes. We use six crash types (head-on, rear-end, right-angle, sideswipe, single-vehicle  
21 and hit-parked-vehicle crashes) and four severity levels (fatal, grievous injury, simple injury and  
22 no injury) as our dependent variable categories. A comprehensive set of exogenous variables  
23 including driver and vehicle characteristics, roadway attributes, environmental and weather

1 information, and temporal factors is considered for the analysis of the models. The empirical  
2 analysis shows that models with temporal heterogeneity outperform the models without temporal  
3 heterogeneity. Among the various copula models, the parameterized Gumbel-Frank copula offers  
4 the best fit. The model specification results reveal multiple temporally varying parameters in both  
5 crash type and severity components. We also conducted a validation exercise using a holdout  
6 sample. The results clearly highlight that the model predictions are closely aligned with observed  
7 values. The results also highlight various novel variables affecting injury severity in Bangladesh.  
8 Further, an elasticity exercise was conducted to illustrate the influence of the exogenous variables  
9 on the crash type and injury severity dimensions. It is worthwhile to mention that this study  
10 provides a valuable insight into crash and injury severity characteristics, and factors contributing  
11 to both dimensions in the context of developing countries.

12 This research is not without limitations. The empirical analysis was conducted using police  
13 reported crash data of Bangladesh. However, in developing countries where crash event reporting  
14 and data collection challenges exist, the issue of underreporting and reporting bias in police  
15 reported crash data is prevalent. These databases are likely to underreport less severe crashes.  
16 Further, victims of road crashes sometimes compromise and mutually settle financial  
17 compensation with vehicle owners or drivers without reporting to the police to avoid complex legal  
18 proceedings. Due to the lack of adequate officers and trained reporting personnel, data collection  
19 and storing processes are also hampered. Recently, several studies relied on alternative data sources  
20 such as newspaper reported data and hospital data for their analysis (Bhuiyan et al., 2022; Roy et  
21 al., 2021). However, these data might lack details about road attributes, driver, vehicle and weather  
22 information and often misclassify the severity of crashes. Future studies in developing countries  
23 can explicitly consider underreporting and reporting bias in the analysis and compare the results

1 with the findings of our study. Further, in our research, we explicitly considered the influence of  
2 unobserved factors affecting crash type and severity using the copula-based approach. The results  
3 clearly highlight the improvement in model fit due to the consideration of these unobserved factors.  
4 However, our model structure does not consider the impact of unobserved factors affecting the  
5 various parameters (beyond temporal factors). The consideration of random parameters within  
6 copula-based approaches can be complex due to the need for simulated likelihood approaches.  
7 Future research efforts can build on our framework to accommodate for random parameters in this  
8 model system (see Bhowmik et al., 2021 for an approach in a different safety context).

9

#### 10 **ACKNOWLEDGMENT**

11 The authors would like to gratefully acknowledge the Accident Research Institute (ARI) of  
12 Bangladesh University of Engineering and Technology (BUET) for providing access to crash data.

13

#### 14 **AUTHOR CONTRIBUTION STATEMENT**

15 The authors confirm contribution to the paper as follows: study conception and design: Shahrior  
16 Pervaz, Naveen Eluru, Tanmoy Bhowmik; data collection: Shahrior Pervaz; model estimation and  
17 validation: Shahrior Pervaz, Tanmoy Bhowmik, Naveen Eluru; analysis and interpretation of  
18 results: Shahrior Pervaz, Tanmoy Bhowmik, Naveen Eluru; draft manuscript preparation: Shahrior  
19 Pervaz, Naveen Eluru, Tanmoy Bhowmik. All authors reviewed the results and approved the final  
20 version of the manuscript.

## REFERENCES

- Abdel-Aty, M., 2003. Analysis of driver injury severity levels at multiple locations using ordered probit models. *J Safety Res* 34, 597–603. <https://doi.org/10.1016/j.jsr.2003.05.009>
- Abegaz, T., Berhane, Y., Worku, A., Assrat, A., Assefa, A., 2014. Effects of excessive speeding and falling asleep while driving on crash injury severity in Ethiopia: A generalized ordered logit model analysis. *Accid Anal Prev* 71, 15–21.
- Ahsan, H.M., Raihan, M.A., Rahman, M., 2011. A study on car involvement in road traffic accidents in Bangladesh, in: *Proceedings of 4th Annual Paper Meeting and 1st Civil Engineering Congress*, Dhaka, Bangladesh. pp. 22–24.
- Akter, T., Pervaz, S., 2019. Assessing motorcycle accident and injury characteristics in Dhaka Metropolitan City, in: *1st International Conference on Urban and Regional Planning (ICURP-2019)*, Dhaka, Bangladesh. pp. 381–390.
- Anowar, S., Yasmin, S., Tay, R., 2014. Factors influencing the severity of intersection crashes in Bangladesh. *Asian transport studies* 3, 143–154.
- Aptech, 2015. Aptech Systems Inc.
- Barua, U., Tay, R., 2010. Severity of urban transit bus crashes in Bangladesh. *J Adv Transp* 44, 34–41.
- Bham, G.H., Javvadi, B.S., Manepalli, U.R.R., 2012. Multinomial Logistic Regression Model for Single-Vehicle and Multivehicle Collisions on Urban U.S. Highways in Arkansas. *J Transp Eng* 138, 786–797. [https://doi.org/10.1061/\(ASCE\)TE.1943-5436.0000370](https://doi.org/10.1061/(ASCE)TE.1943-5436.0000370)
- Bhat, C.R., Eluru, N., 2009. A copula-based approach to accommodate residential self-selection effects in travel behavior modeling. *Transportation Research Part B: Methodological* 43, 749–765. <https://doi.org/10.1016/j.trb.2009.02.001>

- Bhat, C.R., 2011. The maximum approximate composite marginal likelihood (MACML) estimation of multinomial probit-based unordered response choice models. *Transportation Research Part B: Methodological*, 45(7), 923-939.
- Bhowmik, T., Rahman, M., Yasmin, S., Eluru, N. 2021. Exploring analytical, simulation-based, and hybrid model structures for multivariate crash frequency modeling. *Anal Methods Accid Res* 31, 100167.
- Bhuiyan, H., Ara, J., Hasib, K.M., Sourav, M.I.H., Karim, F.B., Sik-Lanyi, C., Governatori, G., Rakotonirainy, A. and Yasmin, S., 2022. Crash severity analysis and risk factors identification based on an alternate data source: a case study of developing country. *Scientific reports*, 12(1), 21243. <https://doi.org/10.1038/s41598-022-25361-5>
- Eluru, N., Bhat, C.R., 2007. A joint econometric analysis of seat belt use and crash-related injury severity. *Accid Anal Prev* 39(5), 1037–1049.
- Eluru, N., Bhat, C.R., Hensher, D.A., 2008. A mixed generalized ordered response model for examining pedestrian and bicyclist injury severity level in traffic crashes. *Accid Anal Prev* 40, 1033–1054. <https://doi.org/10.1016/j.aap.2007.11.010>
- Eluru, N., Paleti, R., Pendyala, R.M. and Bhat, C.R., 2010. Modeling injury severity of multiple occupants of vehicles: Copula-based multivariate approach. *Transp Res Rec*, 2165(1), 1-11.
- Eluru, N., Gayah, V. V, 2022. A note on estimating safety performance functions with a flexible specification of traffic volume. *Accid Anal Prev* 167, 106571. <https://doi.org/10.1016/j.aap.2022.106571>
- Hadiuzzaman, M., Karim, A., Rahman, M., Hasan, T., 2016. Planning level regression models for prediction of the number of crashes on urban arterials in Bangladesh. *International journal of transportation engineering* 3, 267–275.

- Hasanat-E-Rabbi, S., Raihan, M.A., Mahmud, S.M.S., Hoque, M.S., 2022. Pedestrian injury outcomes in the developing urban metropolis: Econometric models for assessing risk factors. *IATSS research* 46, 269–280.
- Hoque, M.M., Mahmud, H., Azad, A., Sohel, S., Sarkar, S., 2009. The risk of children in road traffic accidents in Bangladesh, in: *WEB International Conference*.
- Hoque, M.M., Mahmud, S.M.S., 2010. Promoting vulnerable road users safety towards safe and equitable communities in Bangladesh. *Injury Prevention* 16, A152–A152.
- Hoque, M.M., Mahmud, S.M.S., 2009. Accident Hazards on National Highways in Bangladesh, in: *13th Conference of the Road Engineering Association of Asia and Australasia (REAAA)*, Songdo Convensia, Incheon, Korea. pp. 23–26.
- Hoque, M.M., Mahmud, S.S., Qazi, A.S., 2008. Cycling in Bangladesh. *Bicycling in Asia*, 81–89.
- Hoque, M.M., Pervaz, S., Ashek, A.A.N., 2020. Overview of the highway crashes in Bangladesh, in: *Proceedings of the 5th International Conference on Civil Engineering for Sustainable Development (ICCESD 2020)*, KUET, Khulna, Bangladesh.
- Hoque, M.M., Pervaz, S., Paul, A.K., 2016. Safety ratings of complex pedestrian routes in Dhaka metropolitan city, in: *27th ARRB Conference*, Melbourne, Victoria, Australia, 16–18 November, 2016.
- Hoque, M.M., Roy, K.C., Shah, M.I., 2014. Safety Investigation and Assessment of High Risk Road Sections in Bangladesh, in: *2nd International Conference on Advances in Civil Engineering*, CUET, Chittagong, Bangladesh.
- Hossain, S., Maggi, E., Vezzulli, A., 2022. Factors associated with crash severity on Bangladesh roadways: empirical evidence from Dhaka city. *Int J Inj Contr Saf Promot* 29, 300–311.

- Hyun, K. (Kate), Mitra, S.K., Jeong, K., Tok, A., 2021. Understanding the effects of vehicle platoons on crash type and severity. *Accid Anal Prev* 149, 105858. <https://doi.org/10.1016/j.aap.2020.105858>
- Intini, P., Berloco, N., Fonzone, A., Fountas, G., Ranieri, V., 2020. The influence of traffic, geometric and context variables on urban crash types: A grouped random parameter multinomial logit approach. *Anal Methods Accid Res* 28, 100141. <https://doi.org/10.1016/j.amar.2020.100141>
- Islam, Md.A., Haque, Md.B., Hasan, Md.J., Amin, Md.R., 2022. Frequency Modelling and Risk Evaluation of Road Crashes in Sylhet Region of Bangladesh. *International Journal of Intelligent Transportation Systems Research* 20, 90–102. <https://doi.org/10.1007/s13177-021-00275-0>
- Kamruzzaman, M.D., Haque, M.M., Washington, S., 2014. Analysis of traffic injury severity in Dhaka, Bangladesh. *Transp Res Rec* 2451, 121–130.
- Lee, L.-F., 1983. Generalized econometric models with selectivity. *Econometrica* 507–512.
- Mahmud, S.M.S., Sarker, A., Hoque, M.M., 2011. Identifications and investigations of hazardous road locations on Dhaka-Aricha Highway, in: Paper Presented on 4th Annual Paper Meet and 1st Civil Engineering Congress, Institute of Engineers, Bangladesh (IEB).
- Mannering, F., 2018. Temporal instability and the analysis of highway accident data. *Anal Methods Accid Res* 17, 1–13. <https://doi.org/10.1016/j.amar.2017.10.002>
- Marcoux, R., Yasmin, S., Eluru, N., Rahman, M., 2018. Evaluating temporal variability of exogenous variable impacts over 25 years: An application of scaled generalized ordered logit model for driver injury severity. *Anal Methods Accid Res* 20, 15–29. <https://doi.org/10.1016/j.amar.2018.09.001>

- Marcoux, R., Pervaz, S. and Eluru, N., 2024. Assessing non-motorist safety in motor vehicle crashes—a copula-based approach to jointly estimate crash location type and injury severity. *Anal Methods Accid Res*, 42,100322. <https://doi.org/10.1016/j.amar.2024.100322>
- Paleti, R., Eluru, N., Bhat, C.R., 2010. Examining the influence of aggressive driving behavior on driver injury severity in traffic crashes. *Accid Anal Prev* 42, 1839–1854. <https://doi.org/10.1016/j.aap.2010.05.005>
- Pervaz, S., Bhowmik, T., Eluru, N., 2024. An integrated multi-resolution framework for jointly estimating crash type and crash severity. *Anal Methods Accid Res* 42, 100321. <https://doi.org/10.1016/j.amar.2024.100321>
- Pervaz, S., Bhowmik, T., Eluru, N., 2023. An econometric framework for integrating aggregate and disaggregate level crash analysis. *Anal Methods Accid Res* 39, 100280. <https://doi.org/10.1016/j.amar.2023.100280>
- Pervaz, S., Hazanat-E-Rabbi, S., Newaz, K.M.S., 2016. Pedestrian safety at intersections in Dhaka metropolitan city, in: 17th International Conference Road Safety On Five Continents (RS5C 2016), Rio de Janeiro, Brazil, 17-19 May 2016. Statens väg-och transportforskningsinstitut, pp. 1–11.
- Pervaz, S., Mahmud, S.M.S., Raihan, M.A., Uddin, Md.I., 2022. Road crash in Bangladesh: Where we were, where we are, and where we will be, in: *Advances in Civil Engineering: Select Proceedings of ICACE 2020*. Springer, pp. 301–312.
- Pervaz, S., Rahman, Md Mizanur, Hasanat-E-Rabbi, S., Uddin, M.I., Rahman, Md Mahbubur, 2020a. A review of motorcycle safety situation in Bangladesh, in: *Proceedings of the 5th International Conference on Civil Engineering for Sustainable Development (ICCESD 2020)*, KUET, Khulna, Bangladesh. pp. 7–9.



- Pervaz, S., Raihan, M.A., Rahman, M.M., Uddin, M.I., 2020b. Urban road safety situation in Bangladesh: A synopsis, in: 5th International Conference on Civil Engineering for Sustainable Development (ICCESD), KUET, Khulna, Bangladesh.
- Portoghese, A., Spissu, E., Bhat, C.R., Eluru, N., Meloni, I., 2011. A Copula-Based Joint Model of Commute Mode Choice and Number of Non-Work Stops during the Commute. *International Journal of Transport Economics* 38, 337–362.
- Rahman, M.H., Zafri, N.M., Akter, T., Pervaz, S., 2021. Identification of factors influencing severity of motorcycle crashes in Dhaka, Bangladesh using binary logistic regression model. *Int J Inj Contr Saf Promot* 28, 141–152.
- Rana, T.A., Sikder, S., Pinjari, A.R., 2010. Copula-Based Method for Addressing Endogeneity in Models of Severity of Traffic Crash Injuries: Application to Two-Vehicle Crashes. *Transp Res Rec* 2147, 75–87. <https://doi.org/10.3141/2147-10>
- Roy, S., Hawlader, M.D.H., Nabi, M.H., Chakraborty, P.A., Zaman, S. and Alam, M.M., 2021. Patterns of injuries and injury severity among hospitalized road traffic injury (RTI) patients in Bangladesh. *Heliyon*, 7(3). <https://doi.org/10.1016/j.heliyon.2021.e06440>
- Sadeek, S.N., Rifaat, S.M., 2020. Development of district-wise crash prediction model in Bangladesh. *Cogent Eng* 7, 1762525.
- Saha, B., Fatmi, M.R., Rahman, M.M., 2023. Modelling injury severity of victims in collisions involving public transit in Dhaka, Bangladesh. *International Journal of Crashworthiness* 28, 13–20.
- Saha, B., Fatmi, M.R., Rahman, M.M., 2022. Modeling injury severity of unconventional vehicle occupants: hybrid of latent segments and random parameters logit models. *Transp Res Rec* 2676, 35–47.

- Saha, B., Fatmi, M.R., Rahman, M.M., 2021. Pedestrian injury severity in Dhaka, Bangladesh: a latent segmentation-based logit modeling approach. *Transportation in developing economies* 7, 1–11.
- Sarkar, S., Tay, R., Hunt, J.D., 2011. Logistic regression model of risk of fatality in vehicle–pedestrian crashes on national highways in Bangladesh. *Transp Res Rec* 2264, 128–137.
- Shabab, K.R., Bhowmik, T., Zaki, M.H., Eluru, N., 2024. A systematic unified approach for addressing temporal instability in road safety analysis. *Anal Methods Accid Res* 43, 100335.
- Sklar, A., 1973. Random Variable, Joint Distribution Functions, and Copulas. *Kybernetika*, 9(6)
- Srinivasan, K.K., 2002. Injury severity analysis with variable and correlated thresholds: ordered mixed logit formulation. *Transp Res Rec* 1784, 132–141.
- Trivedi, P.K., Zimmer, D.M., 2007. Copula modeling: an introduction for practitioners. *Foundations and Trends® in Econometrics* 1, 1–111.
- Uddin, M.I., Raihan, M.A., Mahmud, S.M.S., Pervaz, S., 2021. Road Safety Status Of Dhaka City: What Does Our Data Tell Us and Priorities for the way Forward, in: 5th International Conference on Advances in Civil Engineering (ICACE 2020), Chattogram, Bangladesh.
- World Health Organization (WHO), 2019. Global Health Observatory Data Repository [WWW Document]. URL <https://apps.who.int/gho/data/node.main.A997?lang=en> (accessed 7.13.23).
- Yasmin, S., Eluru, N., Bhat, C.R., Tay, R., 2014a. A latent segmentation based generalized ordered logit model to examine factors influencing driver injury severity. *Anal Methods Accid Res* 1, 23–38. <https://doi.org/10.1016/j.amar.2013.10.002>
- Yasmin, S., Eluru, N., Pinjari, A.R., Tay, R., 2014b. Examining driver injury severity in two vehicle crashes—A copula based approach. *Accid Anal Prev* 66, 120–135.

Ye, X., Pendyala, R.M., Al-Rukaibi, F.S., Konduri, K., 2008. Joint model of accident type and severity for two-vehicle crashes. Compendium of Papers CD-ROM, the 87th Annual Meeting of the Transportation Research Board, Washington, DC, USA, 13–17 January 2008.

Zafri, N.M., Prithul, A.A., Baral, I., Rahman, M., 2020. Exploring the factors influencing pedestrian-vehicle crash severity in Dhaka, Bangladesh. *Int J Inj Contr Saf Promot* 27, 300–307.

1

## APPENDIX

2 Table A.1: Sample Share of the Selected Variables (%)

Variables	Crash Types					
	Head-on (3,770)	Rear-end (2,809)	Right-angle (196)	Sideswipe (1,186)	Single-vehicle (1,481)	Hit-parked-vehicle (558)
<i>Injury Severity</i>						
Fatal injury	16.84*	9.36	5.10	7.67	5.54	8.24
Grievous injury	11.67	8.40	9.18	7.59	4.39	7.35
Simple injury	7.03	4.24	2.04	5.48	7.97	5.91
No injury	64.46	78.00	83.67	79.26	82.11	78.49
<i>Driver Characteristics</i>						
Driving Under Influence (drug/alcohol) suspicion						
DUI suspect	11.99	12.14	10.20	12.31	15.60	8.60
Not DUI suspect	88.01	87.86	89.80	87.69	84.40	91.40
Speeding related						
Speeding	48.49	58.17	78.06	50.76	42.47	52.51
Not speeding	51.51	41.83	21.94	49.24	57.53	47.49
<i>Vehicle Characteristics</i>						
Vehicle type						

Variables	Crash Types					
	Head-on (3,770)	Rear-end (2,809)	Right-angle (196)	Sideswipe (1,186)	Single-vehicle (1,481)	Hit-parked-vehicle (558)
Bus	22.41	21.25	22.96	21.50	33.90	20.61
Truck	26.47	24.81	23.47	27.23	25.05	37.10
4-wheeler light vehicles	17.82	23.07	32.14	19.98	20.19	20.43
Pick-up	4.35	4.31	6.12	3.63	3.44	4.48
Motorcycle	10.53	10.64	7.14	11.21	1.96	5.38
Motorized 3-wheelers	10.69	7.37	4.59	6.16	8.58	6.09
Informal vehicles	6.21	7.12	3.06	8.01	5.33	4.84
Others	1.51	1.42	0.51	2.28	1.55	1.08
Vehicle maneuvering						
Straight	73.82	80.60	79.08	64.00	75.22	54.48
Overtaking	8.20	3.52	8.16	8.18	9.79	3.94
Crossing	4.43	1.32	5.61	5.82	1.69	1.25
Turning	4.83	6.48	3.57	9.87	3.44	3.41
Others	8.73	8.08	3.57	12.14	9.86	36.92
Fitness certificate						
Present	55.89	51.90	47.45	55.31	55.23	52.87
Not present	44.11	48.10	52.55	44.69	44.77	47.13

Variables	Crash Types					
	Head-on (3,770)	Rear-end (2,809)	Right-angle (196)	Sideswipe (1,186)	Single-vehicle (1,481)	Hit-parked-vehicle (558)
<i>Roadway Characteristics</i>						
Location type						
Urban area	23.42	47.85	75.00	31.45	19.72	34.41
Rural area	76.58	52.15	25.00	68.55	80.28	65.59
Road class						
National highways	55.46	42.19	23.98	44.18	47.06	55.02
Regional highways	15.68	11.50	3.57	17.20	14.79	12.19
Feeder roads	11.83	11.11	4.59	13.74	17.56	8.60
Village roads	6.84	3.84	4.08	8.85	9.79	3.23
City roads	10.19	31.36	63.78	16.02	10.80	20.97
Presence of divider						
Divided	8.51	34.25	55.61	15.77	8.17	20.43
Undivided	91.49	65.75	44.39	84.23	91.83	79.57
Road geometry						
Straight	86.68	93.95	97.45	88.28	83.19	94.98
Curve	10.16	3.92	2.04	9.02	9.59	3.76
Slope	1.30	1.03	0.51	0.51	2.36	1.08

Variables	Crash Types					
	Head-on (3,770)	Rear-end (2,809)	Right-angle (196)	Sideswipe (1,186)	Single-vehicle (1,481)	Hit-parked-vehicle (558)
Others	1.62	0.89	0.00	2.11	3.85	0.00
Facility type						
Not at intersection	73.74	69.35	26.02	60.62	76.03	65.23
At intersection	26.26	30.65	73.98	39.38	23.97	34.77
Surface quality						
Good	96.23	96.97	100.00	95.11	90.41	96.59
Rough	2.73	2.35	0.00	3.04	6.48	2.69
Road features						
Bridge-culvert	3.10	2.56	0.00	2.70	4.59	2.51
None/narrowing/restricted	96.90	97.44	100.00	97.30	95.41	97.49
<b><i>Environmental and Weather Characteristics</i></b>						
Time of the day						
Late night	15.94	17.48	20.41	13.66	25.05	29.75
Peak morning	13.02	11.14	10.71	12.06	12.02	11.47
Off-peak morning	20.69	20.86	21.43	22.51	18.84	15.59
Off-peak evening	24.96	22.18	25.00	24.62	19.99	15.95
Peak evening	11.46	12.46	9.18	12.48	10.67	9.50

Variables	Crash Types					
	Head-on (3,770)	Rear-end (2,809)	Right-angle (196)	Sideswipe (1,186)	Single-vehicle (1,481)	Hit-parked-vehicle (558)
Late evening	13.93	15.88	13.27	14.67	13.44	17.74
Season of the year						
Winter	25.92	26.37	22.96	27.07	26.74	24.37
Summer	26.45	25.95	30.61	26.89	27.35	27.42
Rainy	25.97	25.28	26.02	23.61	24.17	24.73
Autumn	21.67	22.46	20.41	22.43	21.74	23.48
Light conditions						
Daylight	70.08	67.78	64.80	70.91	61.44	55.73
Dawn/dusk	14.54	11.75	12.24	13.07	16.41	15.95
Night lighted	4.91	12.53	21.43	7.00	6.14	10.57
Night not lighted	10.48	7.94	1.53	9.02	16.00	17.74
Weather conditions						
Clear	91.03	94.80	96.43	92.75	90.01	94.44
Rain	5.73	2.78	2.55	4.13	6.28	3.41
Fog and wind	3.24	2.42	1.02	3.12	3.71	2.15
<i>Temporal Characteristics</i>						
Year						



Variables	Crash Types					
	Head-on (3,770)	Rear-end (2,809)	Right-angle (196)	Sideswipe (1,186)	Single-vehicle (1,481)	Hit-parked-vehicle (558)
2000	7.08	10.36	11.73	7.34	8.71	6.99
2001	5.36	6.16	8.67	6.16	8.04	8.06
2002	5.97	9.36	10.20	9.36	11.07	9.14
2003	7.67	8.44	10.20	8.60	10.20	11.47
2004	6.39	8.26	7.14	6.91	7.43	6.09
2005	6.68	6.05	9.18	6.75	8.10	4.30
2006	6.37	5.41	8.16	6.49	6.68	7.71
2007	8.49	6.51	6.12	9.11	7.70	5.56
2008	7.32	7.33	7.14	8.85	8.44	8.42
2009	6.92	7.23	7.65	6.16	4.86	7.89
2010	6.39	6.51	3.06	4.64	4.93	5.02
2011	4.91	4.95	3.57	3.96	3.31	3.41
2012	6.21	4.31	2.04	5.14	3.24	4.84
2013	5.04	3.49	1.02	3.29	2.57	3.76
2014	5.07	2.28	1.02	4.22	2.43	3.94
2015	4.14	3.35	3.06	3.04	2.30	3.41

1 \*Column percentage

1 **Table A.2: MNL (Crash Type) Model Estimates with Temporal Heterogeneity (Base: Head-on)**

Variables	Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Constant	-0.617	-15.193	-4.084	-26.482	-1.451	-31.366	-1.067	-19.648	-1.993	-26.170
<i>Driver Characteristics</i>										
DUI suspicion (Base: Not DUI suspect)										
DUI suspect*	--	--	--	--	--	--	0.236	5.214	--	--
DUI suspect* nYear4	--	--	--	--	--	--	-0.304	-4.780	--	--
<i>Vehicle Characteristics</i>										
Vehicle type (Base: 4-wheeler light vehicles)										
Bus	--	--	--	--	--	--	0.023	2.880	--	--
Truck	--	--	--	--	--	--	-0.049	-5.247	0.135	1.990
Truck*nYear4	--	--	--	--	--	--	--	--	-0.285	-1.782
Truck*nYear7	--	--	--	--	--	--	--	--	0.344	1.851
Truck*nYear10	--	--	--	--	--	--	--	--	-0.280	-2.132
Motorcycle	--	--	--	--	--	--	-0.655	-5.148	-0.087	-3.767
Motorcycle*nYear4	--	--	--	--	--	--	0.664	3.831	--	--
Motorized 3-wheelers	-0.061	-5.213	-0.114	-2.222	-0.200	-2.532	-0.070	-4.816	-0.073	-3.107

Variables	Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Motorized 3-wheelers* nYear4	--	--	--	--	0.206	1.899	--	--	--	--
Informal vehicles	0.019	2.031	--	--	0.025	2.092	--	--	--	--
Vehicle maneuvering (Base: Straight and others)										
Overtaking	--	--	--	--	0.300	4.317	--	--	--	--
Overtaking*nYear4	--	--	--	--	-0.328	-3.481	--	--	--	--
Crossing	--	--	0.129	4.240	--	--	--	--	--	--
Turning	--	--	--	--	--	--	0.027	2.253	--	--
Fitness certificate (Base: Not present)										
Present	-0.013	-2.523	-0.044	-2.337	--	--	--	--	-0.028	-2.897
<b><i>Roadway Characteristics</i></b>										
Location type (Base: Rural area)										
Urban area	0.162	4.872	--	--	--	--	-0.085	-2.990	--	--
Urban area*nYear4	-0.179	-3.973	--	--	--	--	--	--	--	--
Urban area*nYear7	--	--	--	--	--	--	0.303	3.049	--	--
Urban area*nYear10	--	--	--	--	--	--	-0.571	-3.868	--	--
Urban area*nYear13	--	--	--	--	--	--	0.421	2.393	--	--

Variables	Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Road class (Base: National highways)										
Feeder roads	0.038	3.485	--	--	--	--	0.303	7.241	--	--
Feeder roads*nYear4	--	--	--	--	--	--	-0.389	-6.357	--	--
Feeder roads*nYear13	-0.179	-1.727	--	--	--	--	--	--	--	--
Village roads	--	--	--	--	0.162	2.178	0.050	4.142	-0.072	-2.369
Village roads*nYear4	--	--	--	--	-0.186	-1.812	--	--	--	--
City roads	0.028	3.032	0.566	5.414	--	--	0.049	3.463	--	--
City roads*nYear4	--	--	-0.609	-4.157	--	--	--	--	--	--
Presence of divider (Base: Not divided)										
Divided	0.542	13.211	0.442	4.255	0.221	3.976	--	--	0.070	5.087
Divided*nYear4	-0.592	-10.489	-0.467	-3.202	-0.227	-2.998	--	--	--	--
Road geometry (Base: Straight and slope)										
Curve section	-0.073	-6.072	--	--	--	--	--	--	-0.116	-3.934
Facility type (Base: Not at intersection)										
Intersection	--	--	0.558	7.091	0.256	6.640	--	--	0.027	2.661
Intersection*nYear4	--	--	-0.614	-5.688	-0.288	-5.539	--	--	--	--

Variables	Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Surface quality (Base: Good)										
Rough	--	--	--	--	--	--	0.058	3.842	--	--
Road features (Base: None/narrowing/restricted)										
Bridge and culvert	--	--	--	--	--	--	0.039	2.305	--	--
<i>Environmental and Weather Characteristics</i>										
Time of the day (Base: Other than late night))										
Late night	--	--	--	--	--	--	0.336	8.981	0.051	4.469
Late night*nYear4	--	--	--	--	--	--	-0.420	-7.903	--	--
Light condition (Base: Daylight, dawn and dusk)										
Night lighted	0.030	2.868	--	--	--	--	--	--	0.041	2.180
Night not lighted	--	--	--	--	--	--	0.033	3.019	0.185	2.703
Night not lighted*nYear4	--	--	--	--	--	--	--	--	-0.197	-2.032

1 Note: “\*” Represents the effect of the variable for the base year 2000 (nYear1\*DUI suspect), If the interaction of a variable becomes significant for the base year  
2 only, then the slope of the effect of that variable will not change for the rest of the years which implies that the variable impact is linear. For this variable, the  
3 coefficient (estimate for “nYear1\*variable”) is the mean effect for the base year, for the second year the mean effect will be 2\*coefficient, for the third year the  
4 mean effect will be 3\*coefficient, and so on; “--” Represents the variables are not significant at 90% confidence level.

1 **Table A.3: GOL (Injury Severity) Model Estimates with Temporal Heterogeneity**

Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Threshold between NI-SI	0.491	7.016	1.405	16.111	1.578	5.197	1.285	10.818	1.619	16.841	1.514	8.352
Threshold between SI-GI	0.896	15.193	1.810	10.192	1.802	3.078	1.833	4.970	2.338	3.680	1.966	4.662
Threshold between GI-FI	1.779	2.580	2.953	1.976	3.598	2.376	2.764	0.694	3.001	3.313	2.759	1.522
<i>Driver Characteristics</i>												
Speeding related (Base: Not speeding)												
Speeding*	0.075	4.011	--	--	--	--	--	--	--	--	0.045	1.746
Speeding *nYear7	-0.130	-3.539	--	--	--	--	--	--	--	--	--	--
<i>Vehicle Characteristics</i>												
Vehicle type (Base: 4-wheeler light vehicles)												
Bus	-0.100	-7.566	-0.886	-5.641	--	--	-0.526	-3.375	-0.054	-2.752	-0.136	-2.687
Bus*nYear4	--	--	1.028	4.947	--	--	0.597	2.821	--	--	--	--
Truck	-0.475	-6.287	-0.392	-4.309	--	--	-0.165	-4.243	-0.044	-1.861	-0.131	-3.695
Truck*nYear4	0.709	4.384	0.385	3.126	--	--	--	--	--	--	--	--
Truck*nYear7	-0.253	-2.183	--	--	--	--	--	--	--	--	--	--
Pick-up	--	--	--	--	--	--	0.067	1.781	--	--	--	--

Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Motorcycle	0.752	11.415	1.188	13.429	0.416	7.935	0.212	9.913	0.952	6.134	0.182	3.862
Motorcycle*nYear4	-0.722	-8.099	-1.533	-7.733	--	--	--	--	-1.138	-5.208	--	--
Motorcycle*nYear7	--	--	0.477	2.983	--	--	--	--	--	--	--	--
Motorized 3-wheelers	0.094	6.853	0.717	6.652	--	--	0.067	2.392	--	--	0.120	3.104
Informal vehicles	0.061	4.023	-0.857	-5.739	--	--	0.052	2.206	--	--	--	--
Informal vehicles*nYear4	--	--	1.556	2.346	--	--	--	--	--	--	--	--
Informal vehicles*nYear16	--	--	0.717	6.652	--	--	--	--	--	--	--	--
<i>Threshold between SI-GI</i>	--	--	--	--	--	--	-0.303	-1.870	--	--	--	--
<i>Threshold between GI-FI</i>			-0.065	-2.79	--	--	--	--	--	--	--	--
Vehicle maneuvering (Base: Straight and others)												
Turning	--	--	--	--	--	--	--	--	0.098	4.467	--	--
Fitness certificate (Base: Not present)												
Present	--	--	--	--	-0.161	-2.676	--	--	--	--	--	--
<b><i>Roadway Characteristics</i></b>												
Location type (Base: Rural area)												

Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Urban area	-0.026	-2.325	--	--	--	--	-0.035	-2.008	--	--	--	--
Road class (Base: National highways)												
Regional highways	-0.057	-4.972	--	--	--	--	--	--	--	--	--	--
Feeder roads	-0.079	-5.313	-0.048	-2.165	--	--	--	--	--	--	--	--
Village roads	-0.103	-6.536	-0.102	-2.350	--	--	--	--	--	--	--	--
City roads	-0.060	-3.325	-0.064	-4.476	-0.129	-1.919	--	--	--	--	--	--
Surface quality (Base: Good)												
Rough	-0.065	-2.483	--	--	--	--	--	--	--	--	--	--
<i>Environmental and Weather Characteristics</i>												
Time of the day (Base: Other than late night)												
Late night	0.020	1.650	0.036	2.177	--	--	--	--	--	--	0.223	3.597
Late night*nYear7											-0.254	-1.990
<i>Threshold between GI-FI</i>	-0.045	-2.740	--	--	--	--	--	--	--	--	--	--
Season of the year (Base: Summer)												
Rainy	--	--	--	--	--	--	--	--	0.037	1.830	--	--
Light condition (Base: Daylight, dawn/dusk)												



Variables	Head-on		Rear-end		Right-angle		Sideswipe		Single-vehicle		Hit-parked-vehicle	
	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat	Est.	t-stat
Night lighted	--	--	--	--	0.203	2.263	--	--	--	--	--	--
Night not lighted	--	--	--	--	--	--	--	--	0.042	1.928	--	--
Weather condition (Base: Clear)												
Rain	0.067	3.998	--	--	--	--	--	--	--	--	--	--
Fog and wind	0.059	2.522	--	--	--	--	--	--	0.119	2.530	--	--

1 Note: “\*” Represents the effect of the variable for the base year 2000 (nYear1\*Speeding), If the interaction of a variable becomes significant for the base year only,  
2 then the slope of the effect of that variable will not change for the rest of the years which implies that the variable impact is linear. For this variable, the coefficient  
3 (estimate for “nYear1\*variable”) is the mean effect for the base year, for the second year the mean effect will be 2\*coefficient, for the third year the mean effect  
4 will be 3\*coefficient, and so on; “--” Represents the variables are not significant at 90% confidence level; NI=No injury, SI=Simple injury, GI=Grievous injury,  
5 FI=Fatal injury.