

Portland State University

**PDXScholar**

---

PSU Transportation Seminars

Transportation Research and Education Center  
(TREC)

---

4-10-2015

## Geometric Design, Speed, and Safety

Richard J. Porter  
*University of Utah*

Follow this and additional works at: [https://pdxscholar.library.pdx.edu/trec\\_seminar](https://pdxscholar.library.pdx.edu/trec_seminar)



Part of the [Transportation Commons](#), and the [Urban Studies and Planning Commons](#)

**Let us know how access to this document benefits you.**

---

### Recommended Citation

Porter, Richard J., "Geometric Design, Speed, and Safety" (2015). *PSU Transportation Seminars*. 69.  
[https://pdxscholar.library.pdx.edu/trec\\_seminar/69](https://pdxscholar.library.pdx.edu/trec_seminar/69)

This Book is brought to you for free and open access. It has been accepted for inclusion in PSU Transportation Seminars by an authorized administrator of PDXScholar. Please contact us if we can make this document more accessible: [pdxscholar@pdx.edu](mailto:pdxscholar@pdx.edu).



Department of  
**CIVIL & ENVIRONMENTAL ENGINEERING**  
COLLEGE OF ENGINEERING | THE UNIVERSITY OF UTAH

# Geometric Design, Speed, and Safety

R.J. Porter, PhD, PE  
Assistant Professor of Civil Engineering  
University of Utah

[richard.jon.porter@utah.edu](mailto:richard.jon.porter@utah.edu)

801-585-1290



[www.trafficlab.utah.edu](http://www.trafficlab.utah.edu)

From the TREC “instructions for Friday seminar speakers...”




Students in the seminar appreciate knowing how you advanced to your current position, so a brief background statement is usually of interest...





# SW PA Coal Patches

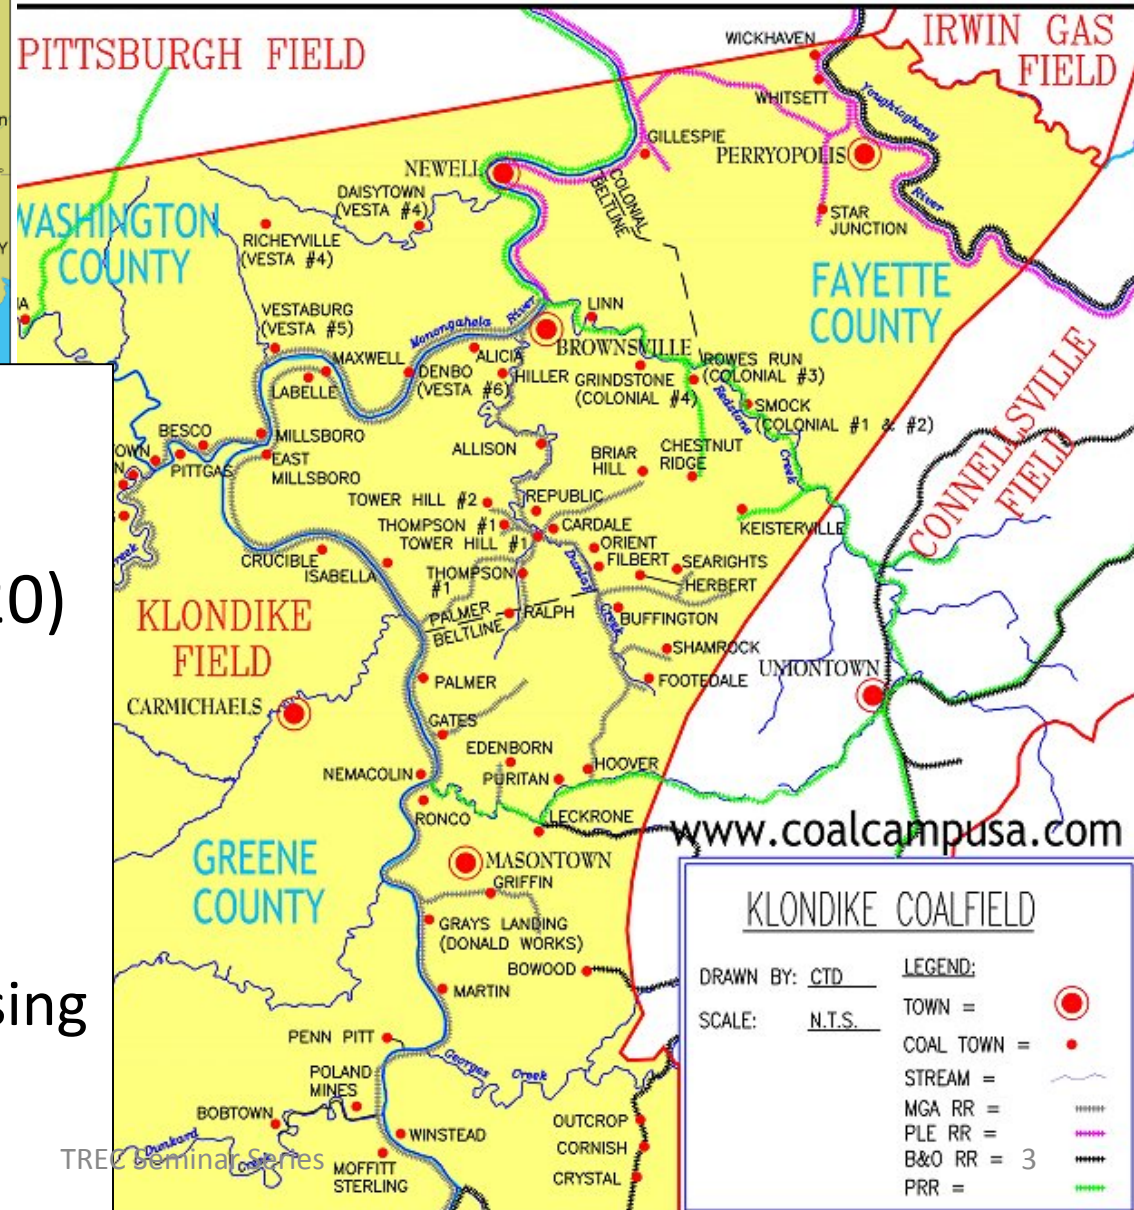

- Pittsburgh coal seam
- Monongahela River
- Coal patches (1880-1920)
  - Highly stratified
  - 75% + eastern and southern European
  - Company stores
  - Rented company housing
  - Iron and Coal Police
  - Union formation


# Vesta #6

## Denbo, PA (pop. 713\*)

- avg house value: \$14,000\*
- avg income:



Rich Porter is shown operating the new continuous miner on the 12 Right section.

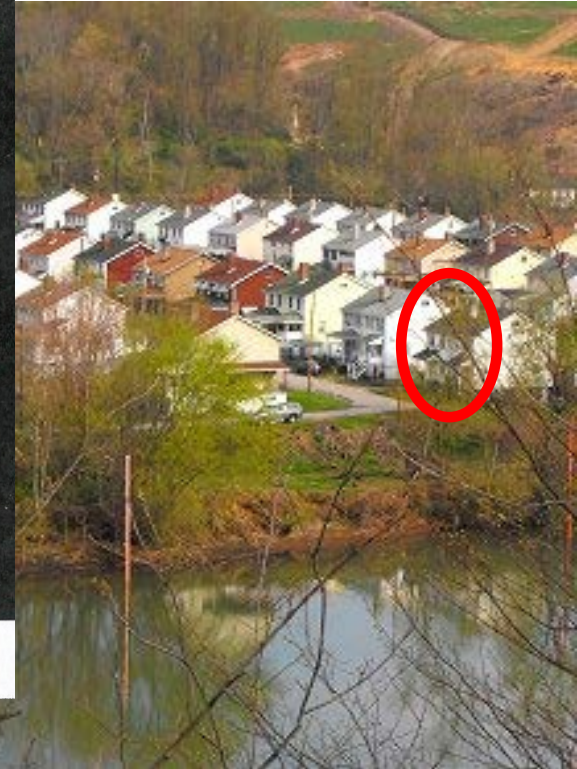

\* data from 2000 census

Pictures from [www.coalcampusa.com](http://www.coalcampusa.com)

4/10/2015

# Education and Academic Experience



- Penn State, '95-'97...?
- Penn State, '97-'99
- Penn State, '00
- Virginia Tech (research)
- Penn State, '07
- Texas A&M
- The U (July 2009 - )

## Teaching and Research:

- highway and street design
- road safety
- project development
- traffic operations
- statistics/econometrics
- risk and reliability analysis

# Geometric Design, Speed, and Safety

- Why do we get what we get?
- Can we get what we want? How?



Pictures from FHWA-HRT-05-098 (2006)



# Background


Self-enforcing, self-explaining design



speed discord

Speed prediction  
feedback loop

Design co

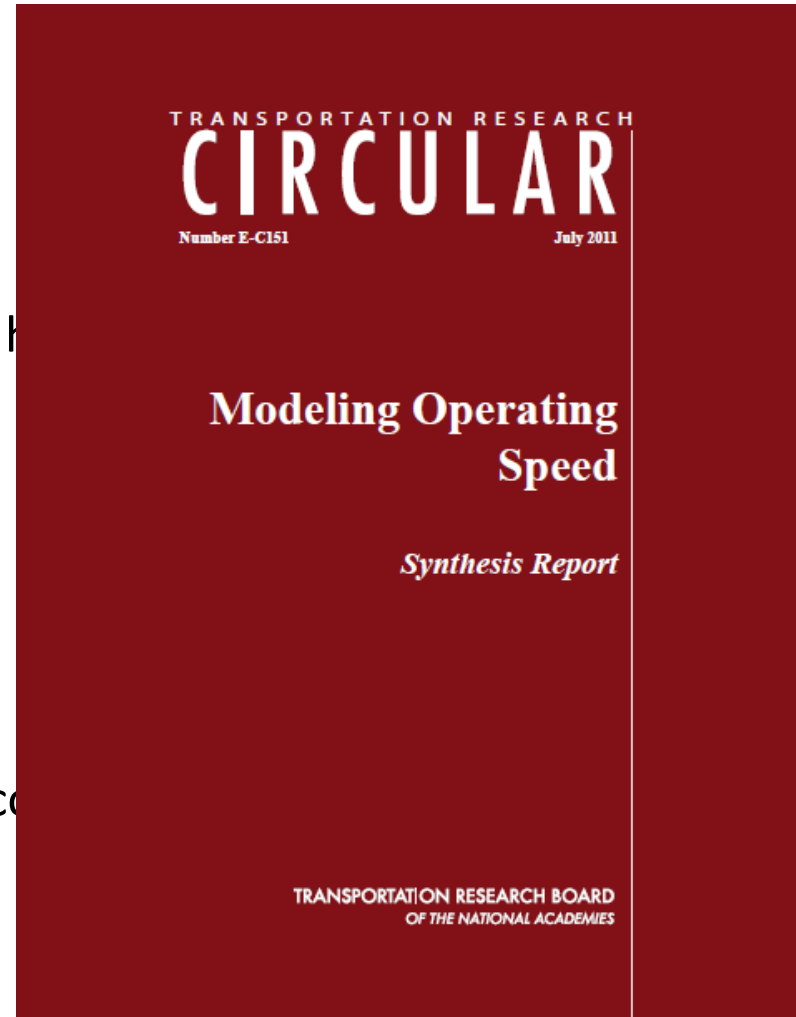





# Design Speed

“...a selected speed used to determine the various geometric design features of the roadway...”  
(2001-current)


“...should be a logical one with respect to topography, anticipated operating speed, the adjacent land use, and the functional classification...”

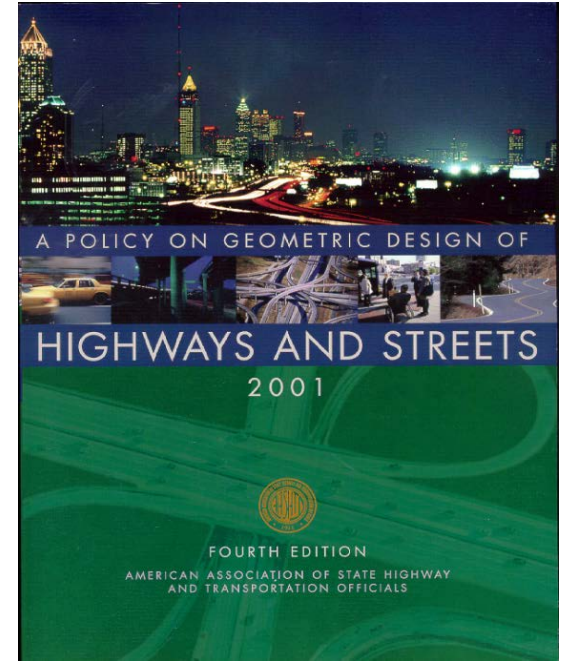

# Structural Design

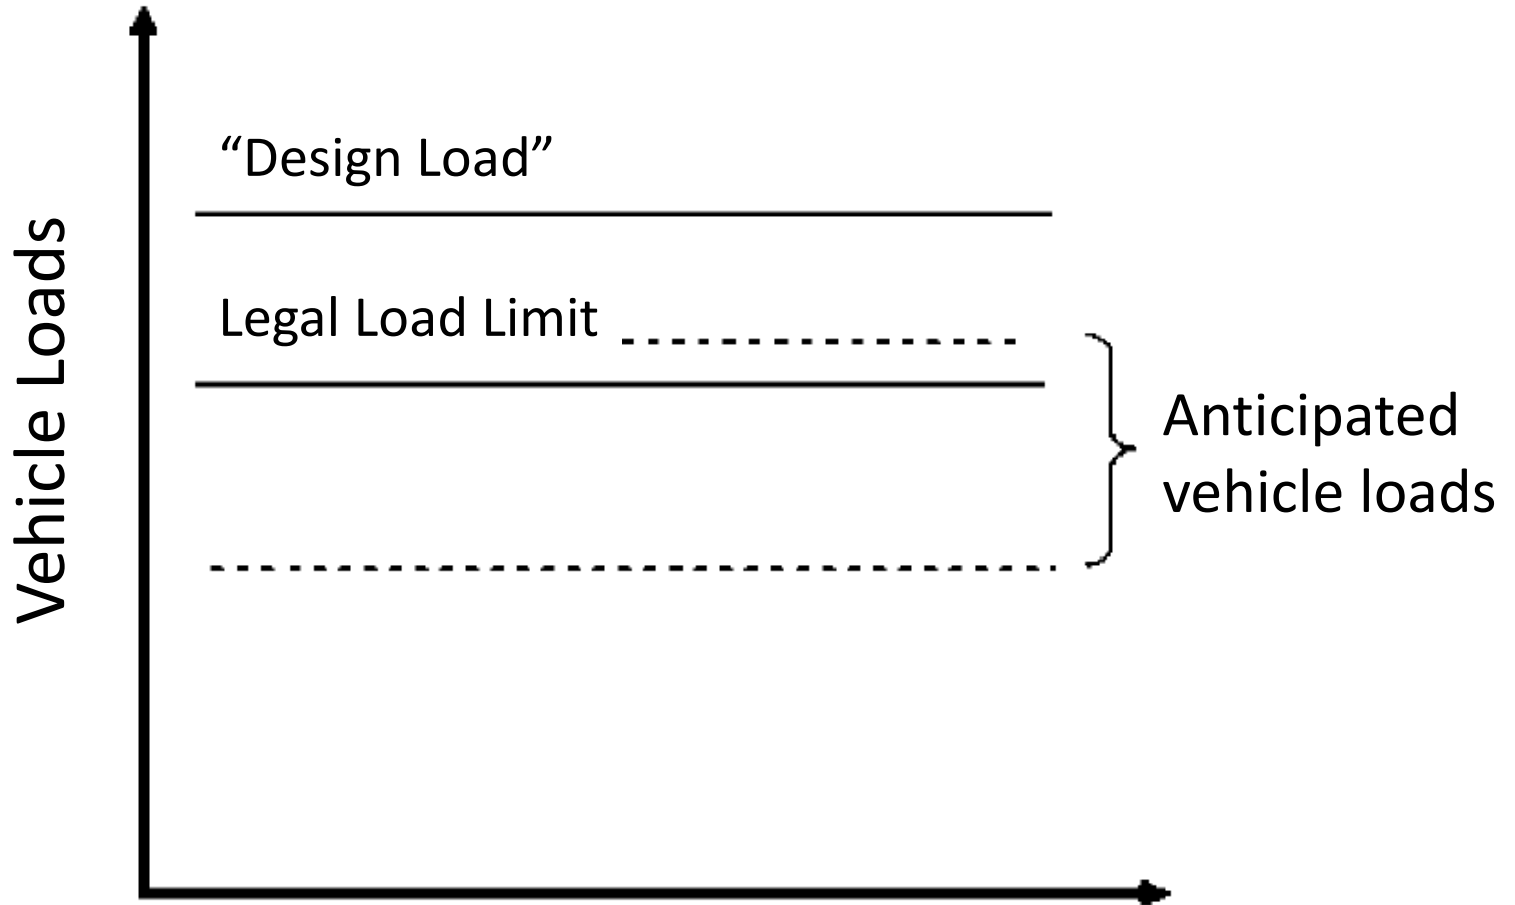


# Design Speed (a look back)

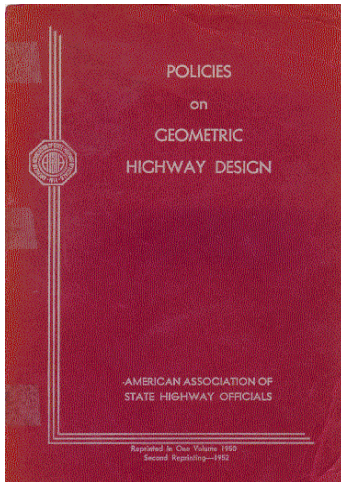


“...the maximum approximately uniform speed which probably will be adopted by the faster group of drivers but not, necessarily, by a small percentage of reckless ones” (pre-1954)

“... the maximum safe speed that can be maintained over a section of highway when conditions are so favorable that the design features of the highway govern.” (1954-2001)

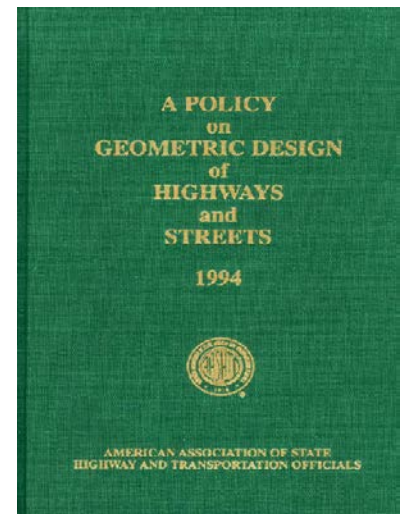

# Approximate Relation Between Design and Running Speeds for Urban Conditions

65

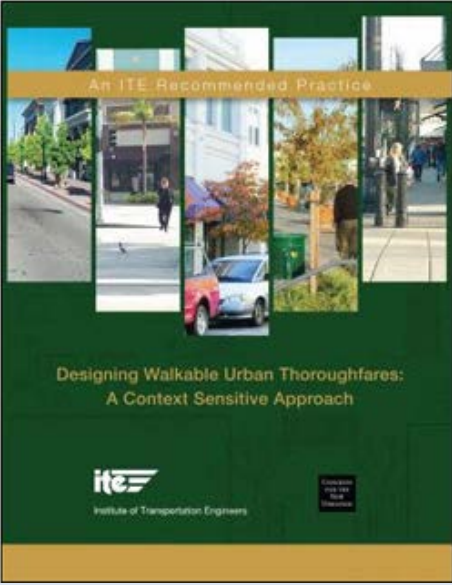

The image shows the cover of a report titled "Designing Walkable Urban Thoroughfares: A Context Sensitive Approach" published by the Institute of Transportation Engineers (ITE). The cover features a collage of urban street scenes, including a sidewalk, a car, and a person walking. The text on the cover includes "An ITE Recommended Practice" at the top and the ITE logo at the bottom.

Design speed ranges from 30 to 40 mph (corresponding to *target speeds* of 25 to 35 mph).

25

35

45

55

65

**Design Speed, mph**


Adapted from AASHTO (1957)

# Design Speed Selection

Insights from NCHRP Report 504

- In **urban areas**, designers generally select design speeds that are within the range of anticipated operating speeds, regardless of terrain or functional class. The **selected design speed was often equal to or 5 mph higher than the anticipated posted speed limit** across terrain types and functional classifications.
- In **rural areas**, designers generally select design speeds that are within the range of anticipated operating speeds, regardless of terrain or functional class. The **selected design speed was nearly always 5 mph higher than the anticipated posted speed limit** across terrain types and functional classifications.

# Speed Relationships in Design Process As Intended/Desired...

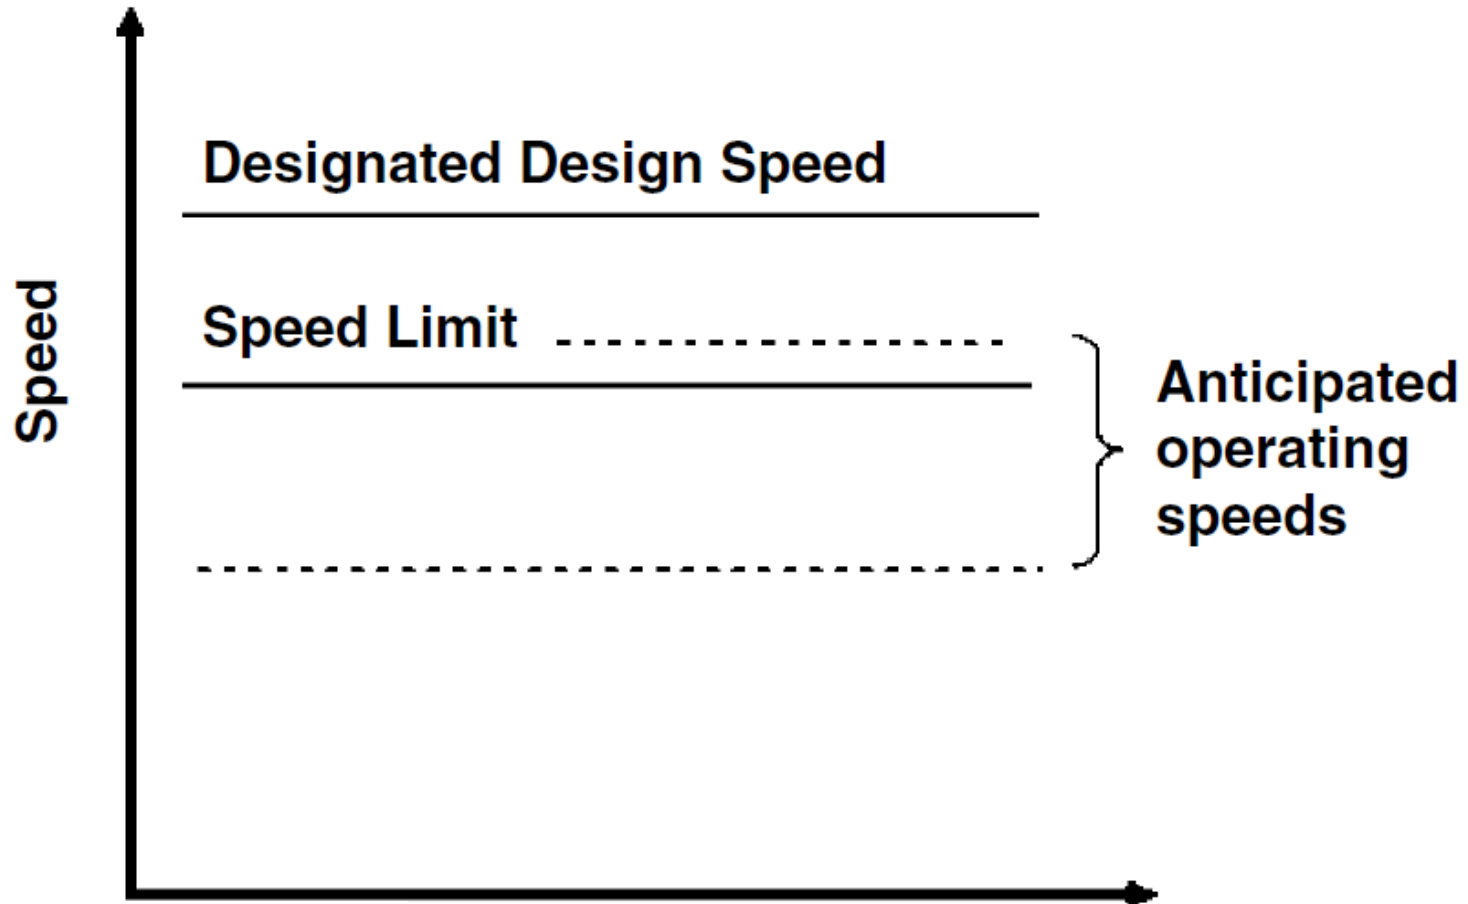

from Donnell et al. (2009)

# Criteria Related to Design Speed

$$\frac{V^2}{15(e+f)} = R$$

$$SSD = 1.47Vt + \frac{V^2}{30\left(\frac{a}{32.2} \pm G\right)}$$

$$M_s = R_v \left( 1 - \cos \frac{28.65S}{R_v} \right)$$

$$L = \frac{AS^2}{200\left(\sqrt{H_1} + \sqrt{H_2}\right)^2}$$


# Example of Limiting Values

$$R_{\min} = \frac{V^2}{15(e_{\max} + f_{\max})}$$

$f_{\max}$ : The point “at which discomfort due to the lateral acceleration is evident to drivers has been accepted as a design control for the maximum side friction factor on high-speed streets and highways.”

$e_{\max}$ : Influenced by climate conditions, constructability, adjacent land use and the frequency of slow moving vehicles

US Customary

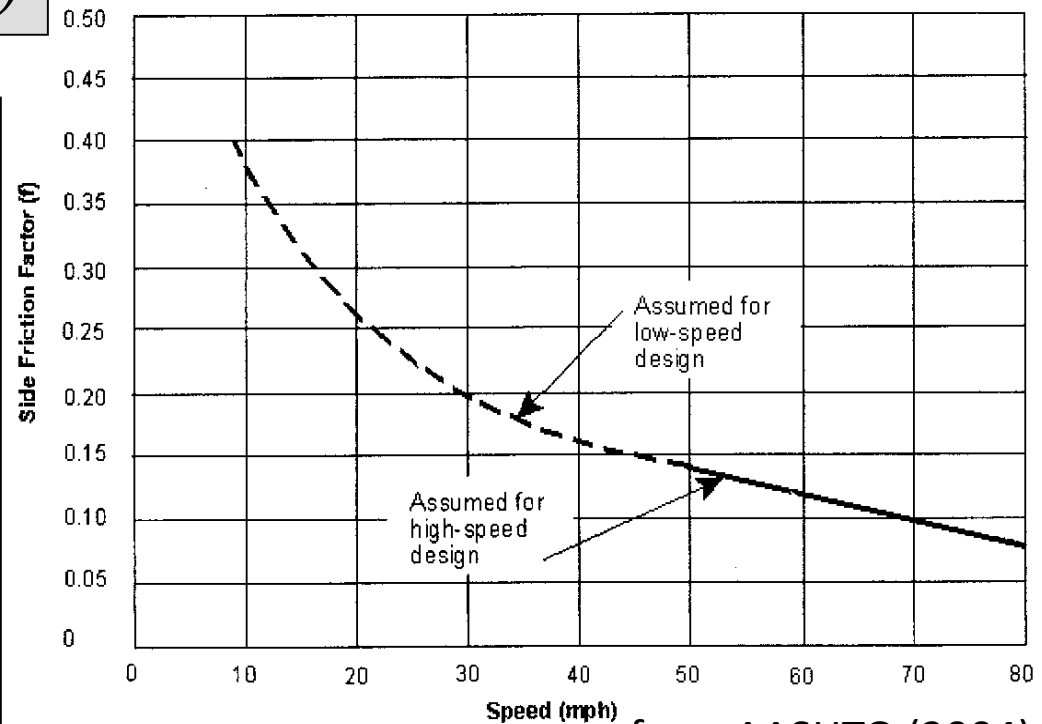


from AASHTO (2004)


Exhibit 3-12. Side Friction Factors Assumed for Design



# “Limiting” Values?

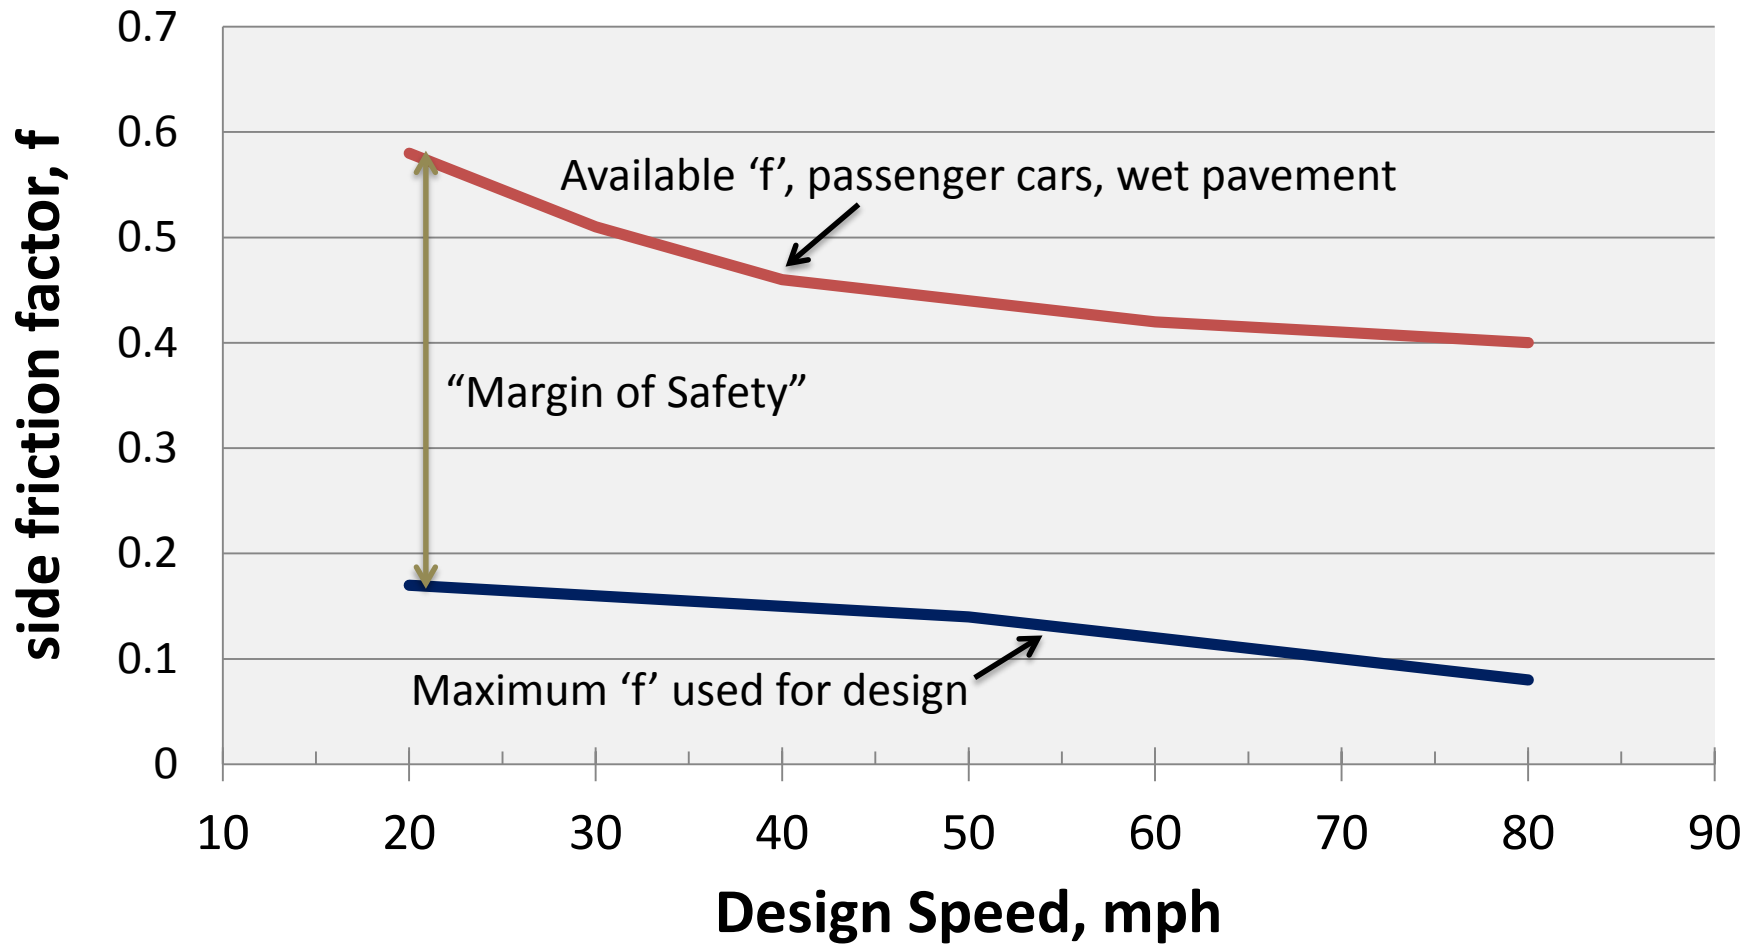


# “Limiting” Values?

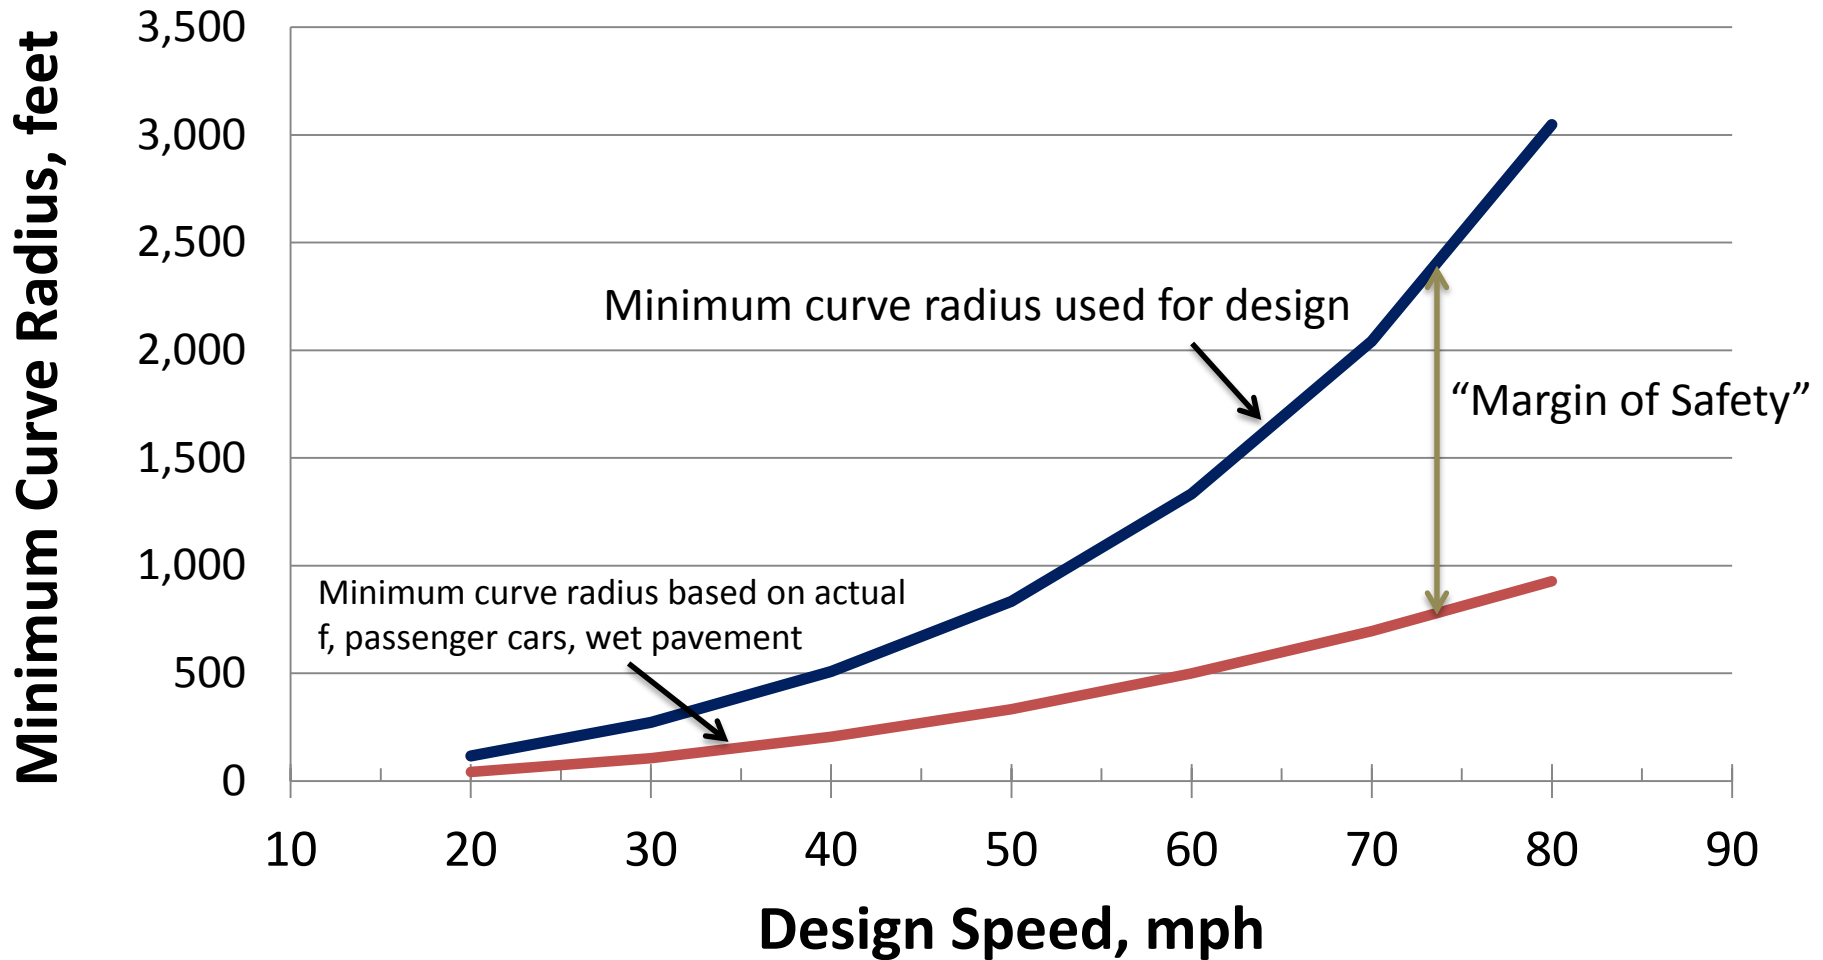

# Roadway Design Guidance

“Above-minimum design values should be used, where practical...”

# Inferred Design Speed

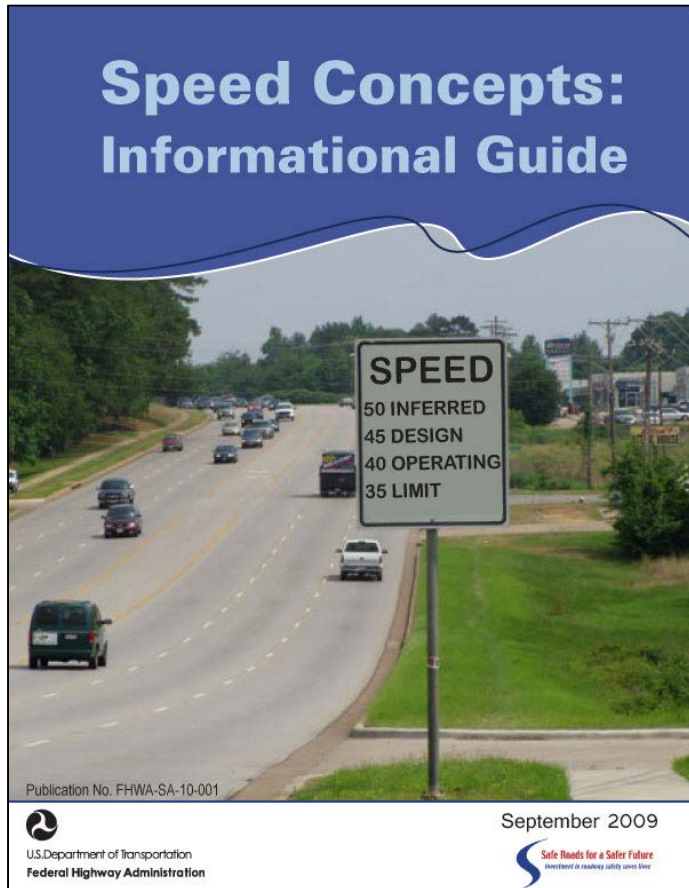


**FHWA-SA-10-001**

Maximum speed for which all critical design-speed-related criteria are met at a particular location

Inferred design speed of a feature differs from the designated design speed when the actual dimension differs from the criterion-limiting (minimum or maximum) value.


# Speed Relationships in Design Process

## As Intended...(with inferred design speed)

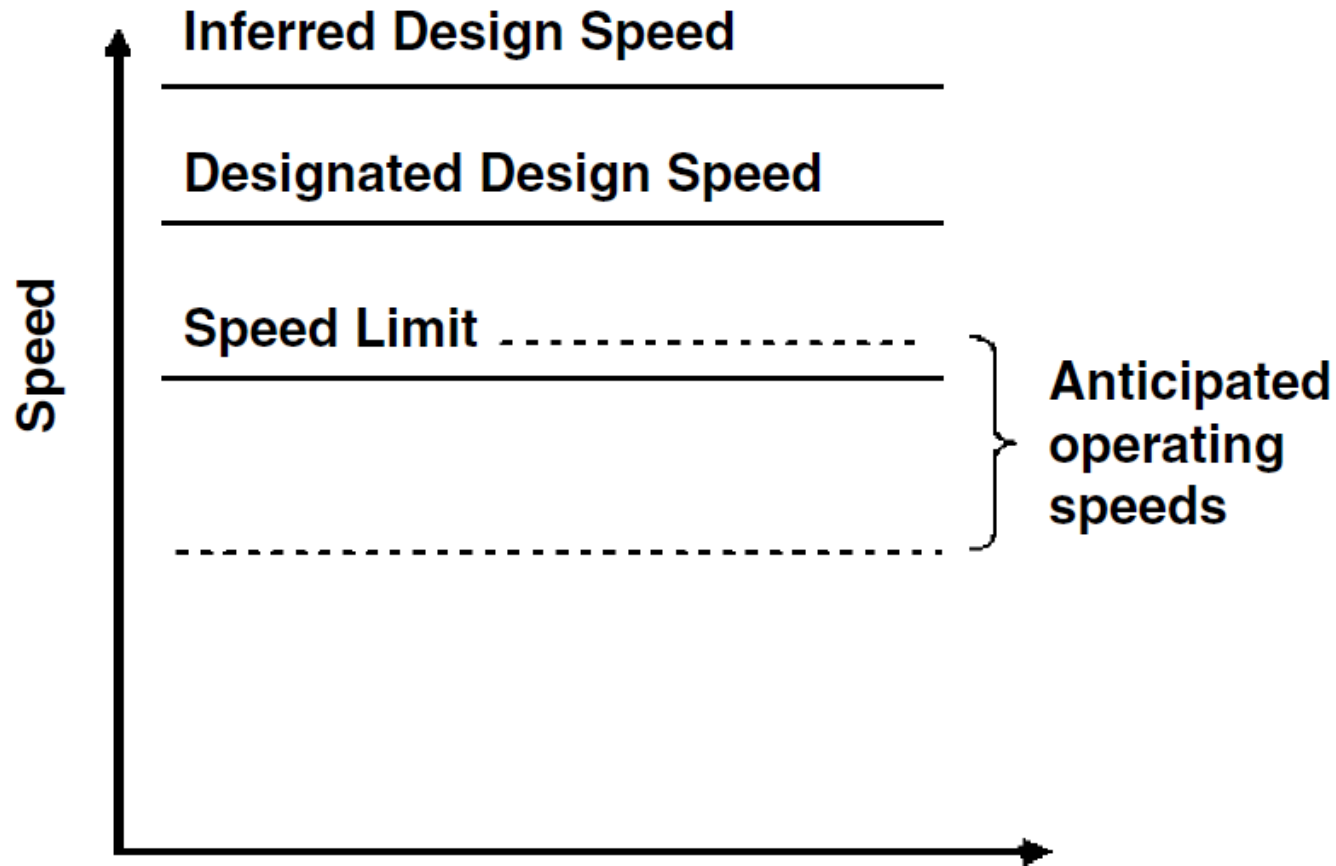


from Donnell et al. (2009)

# Expected & Observed Relation Between Design and Running Speeds (Low-Volume)

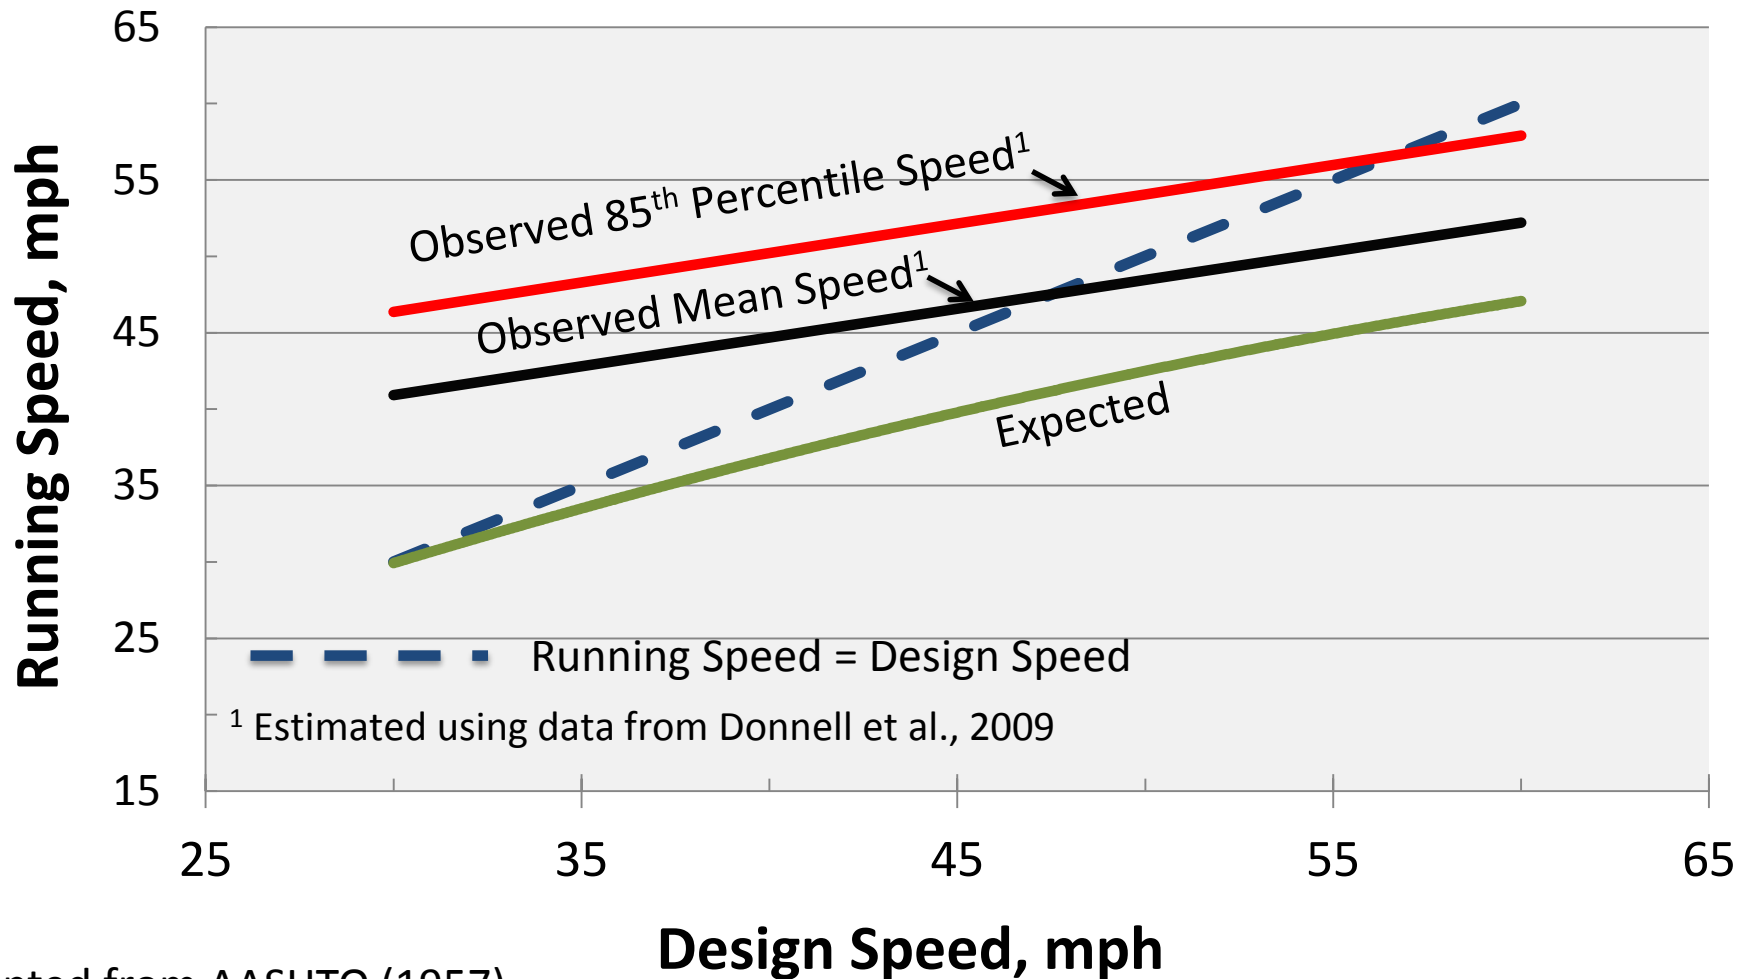

<sup>1</sup> Estimated using data from Donnell et al., 2009

Adapted from AASHTO (1957)




# Case Study: Blue Course Drive

Ferguson Township, PA





- New alignment  $\approx$  2002
- ADT  $\approx$  3,500
- Design speed: 40 mph
- Urban collector
- Segment length: 1.5 miles
- Horizontal curves: 3
- Maximum grade: +3.5%, -6.6%




# Case Study: Blue Course Drive

Ferguson Township, PA

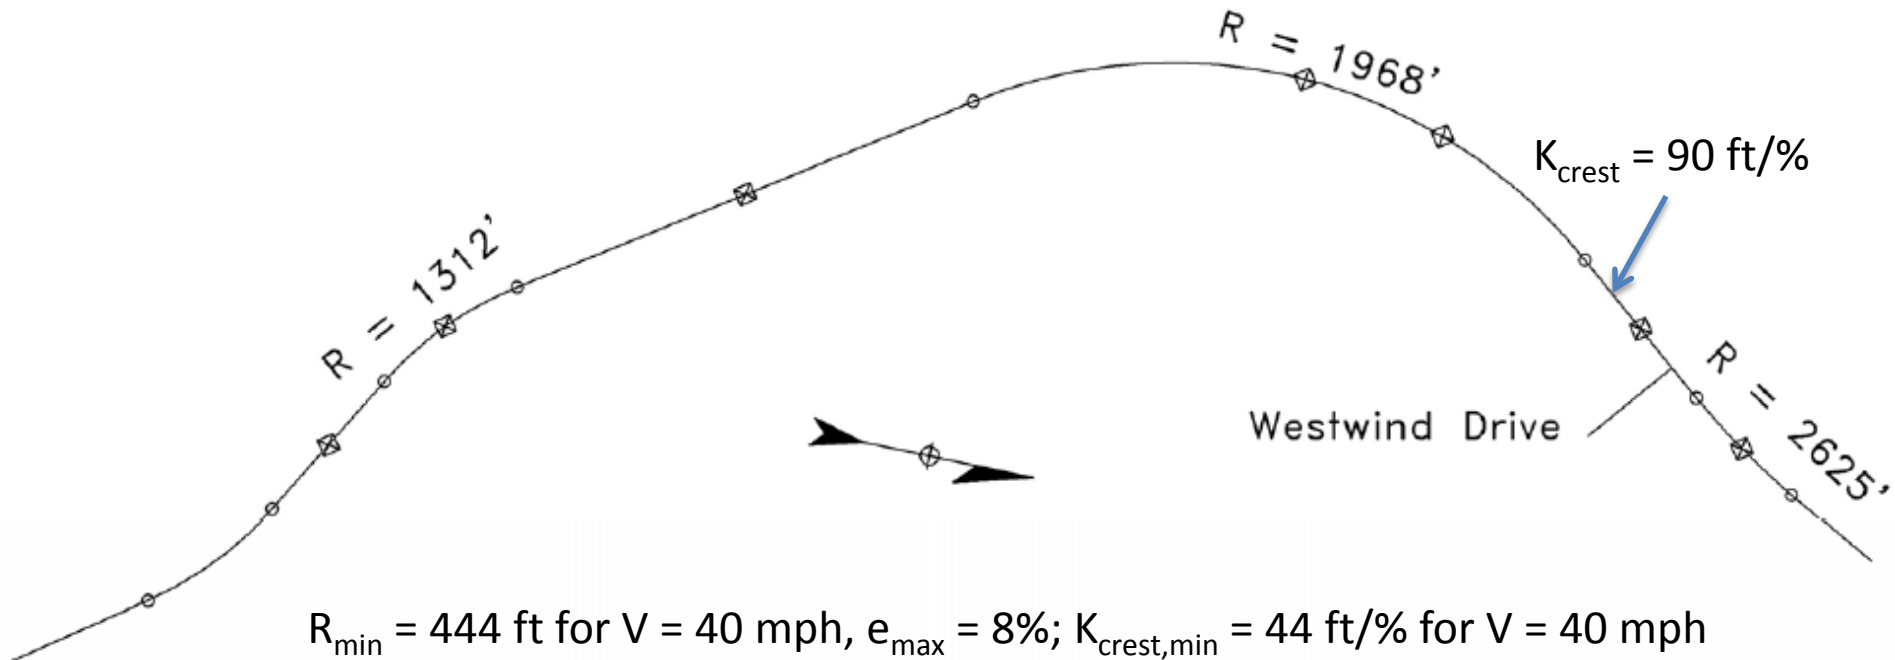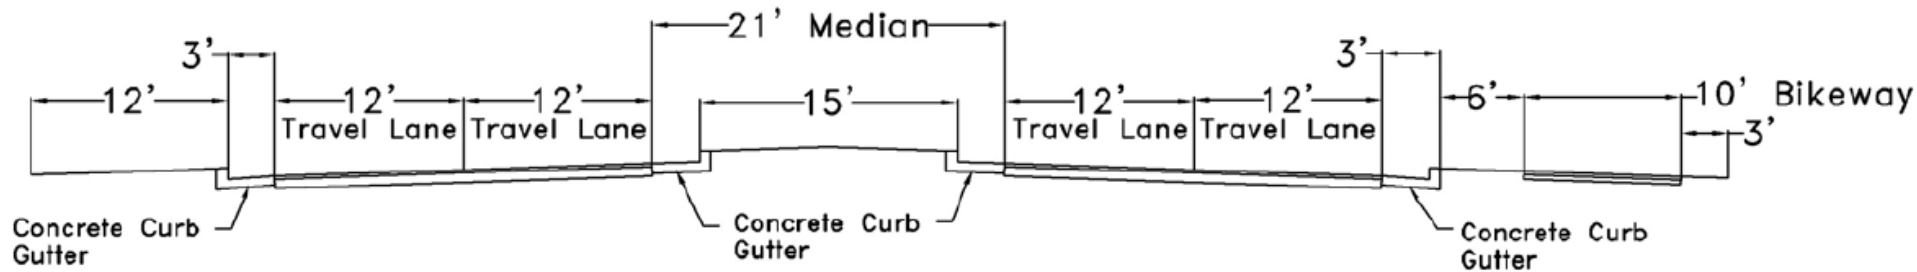







# Case Study: Blue Course Drive

Ferguson Township, PA

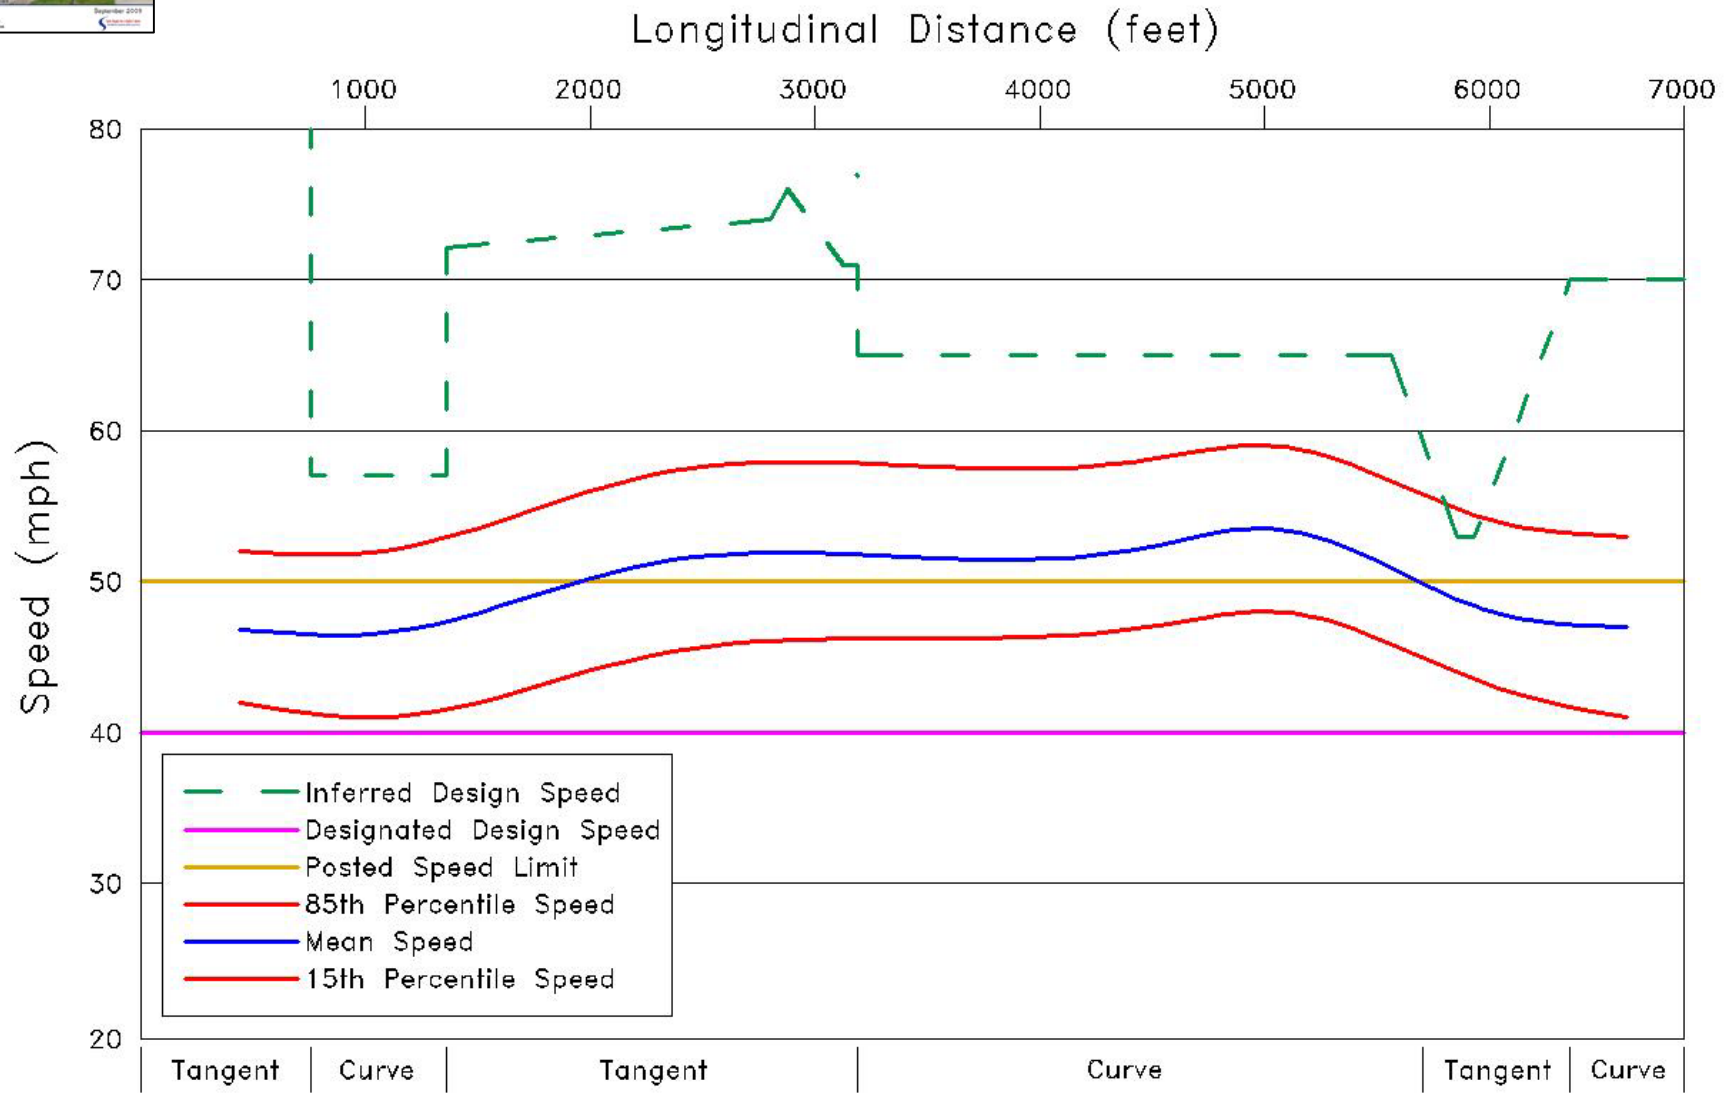

# Observed Speed Relationships? Low to Moderate Design Speeds

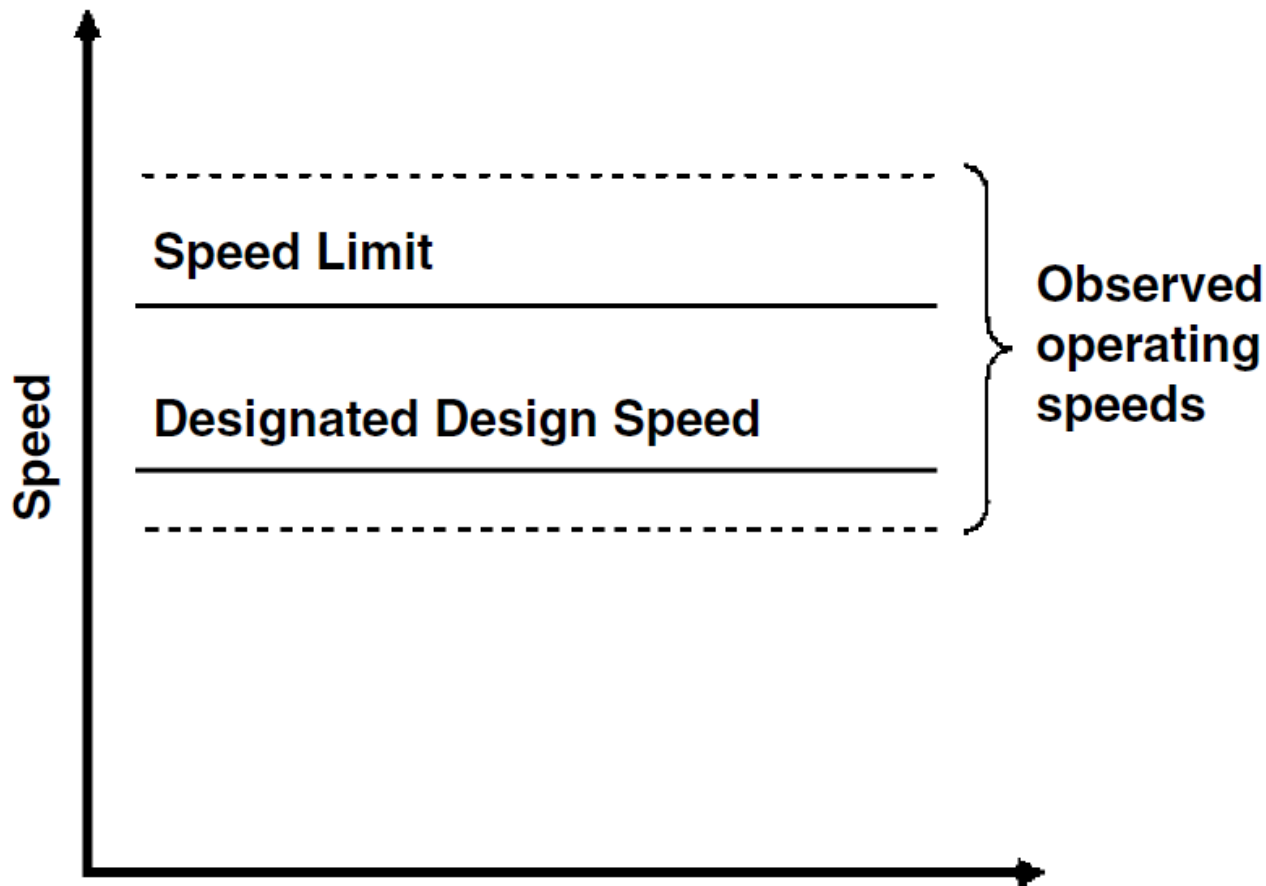

from Donnell et al. (2009)


# Speed Management Through Road Geometrics

“Self-Enforcing, Self-Explaining Roadway Design”

from Porter et al. (2012)

1. What is known about relationships between road geometry and operating speeds?
2. To what degree does road geometry influence operating speeds?
3. How are safety and security influenced by road geometry?
4. What are potential impacts to large vehicles?
5. What is the nature of the speed-safety trade-off?

# What is known about relationships between road geometry and operating speeds?

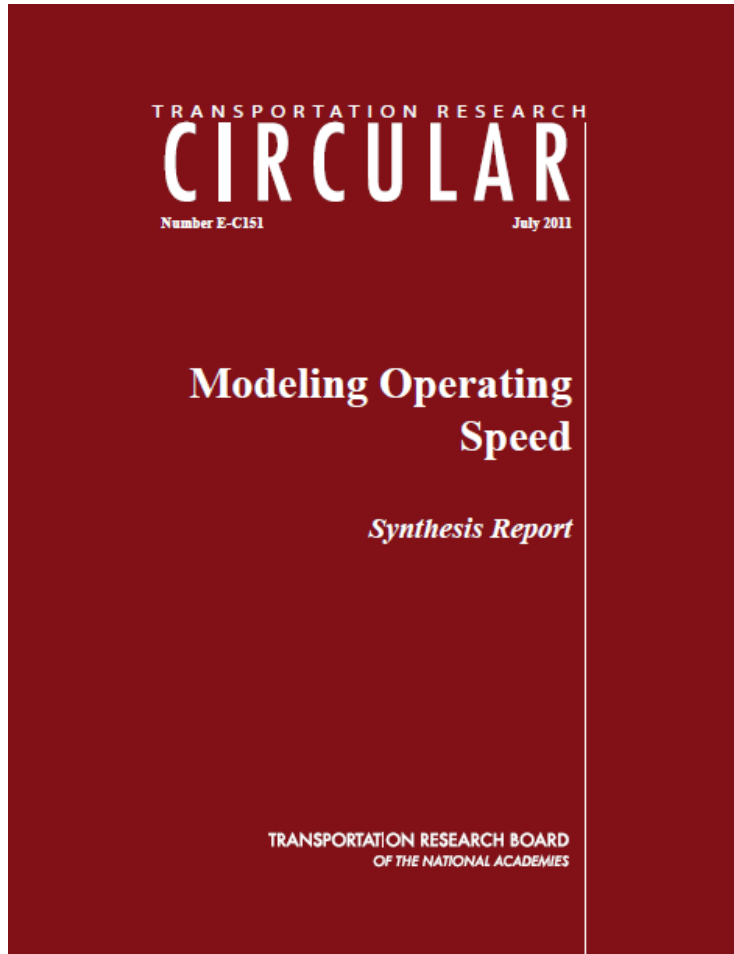

a synthesis of existing operating speed models developed in different regions of the world.


10 authors from 5 different countries

Much of what we know in North America is for rural, two-lane highways


# What is known about relationships between road geometry and operating speeds?

4.5%


“It is now widely believed that collision rate is more directly affected by speed variations than by speed per se, given that intuitively, the probability of conflicts would be lower if all vehicles were travelling at the same speed.” - TAC

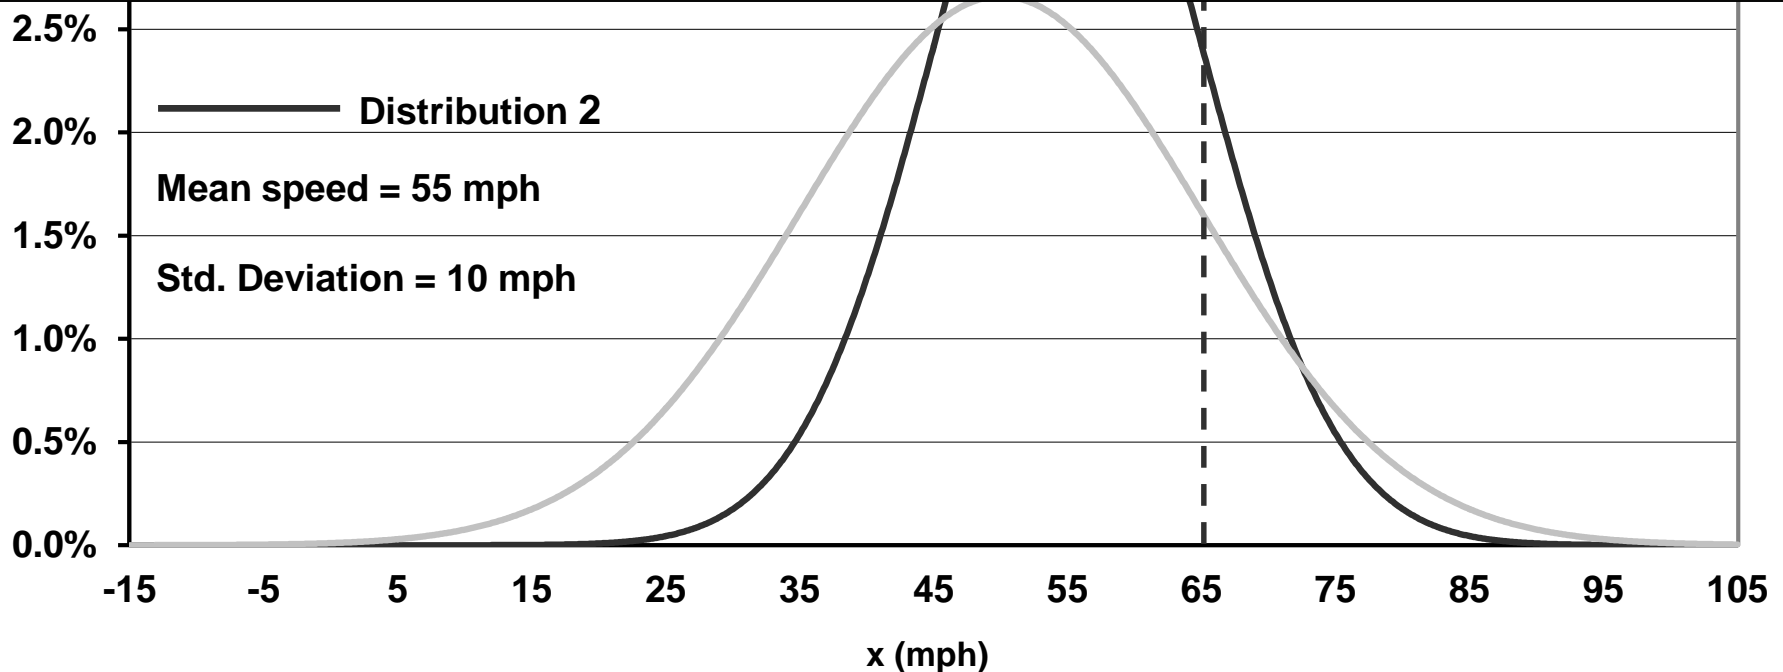


# To what degree does road geometry influence operating speeds?

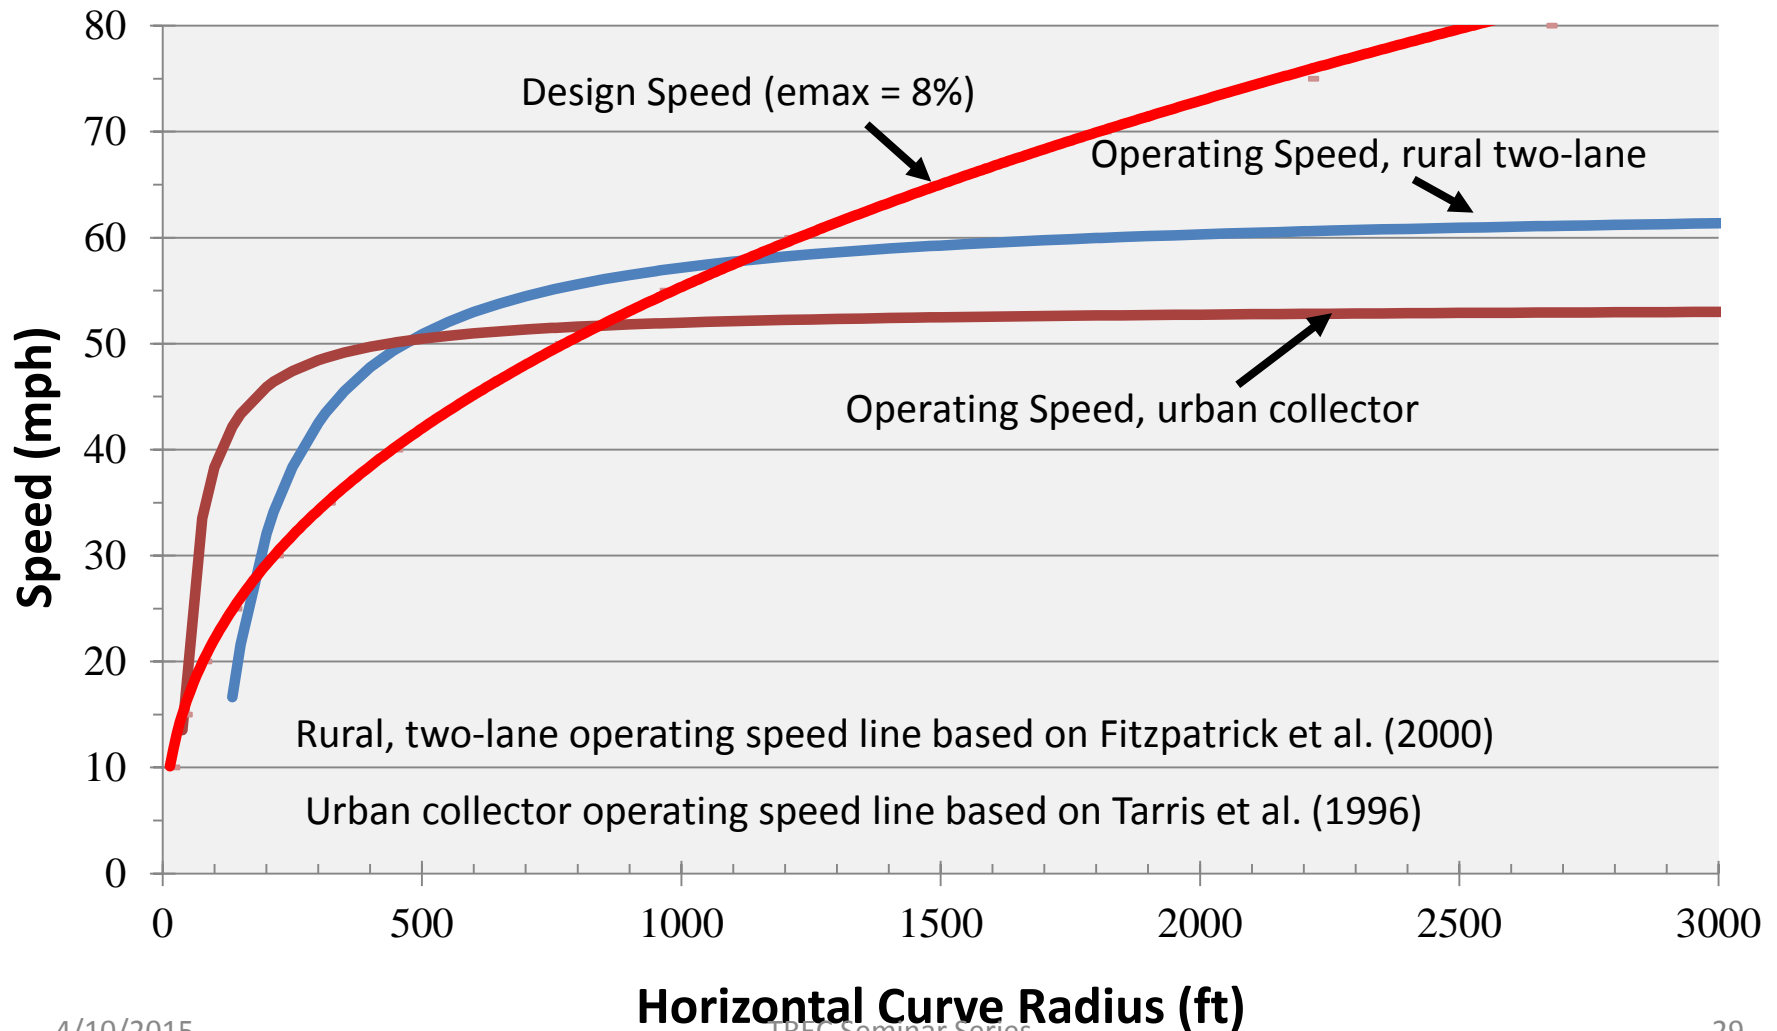

# To what degree does road geometry influence operating speeds?

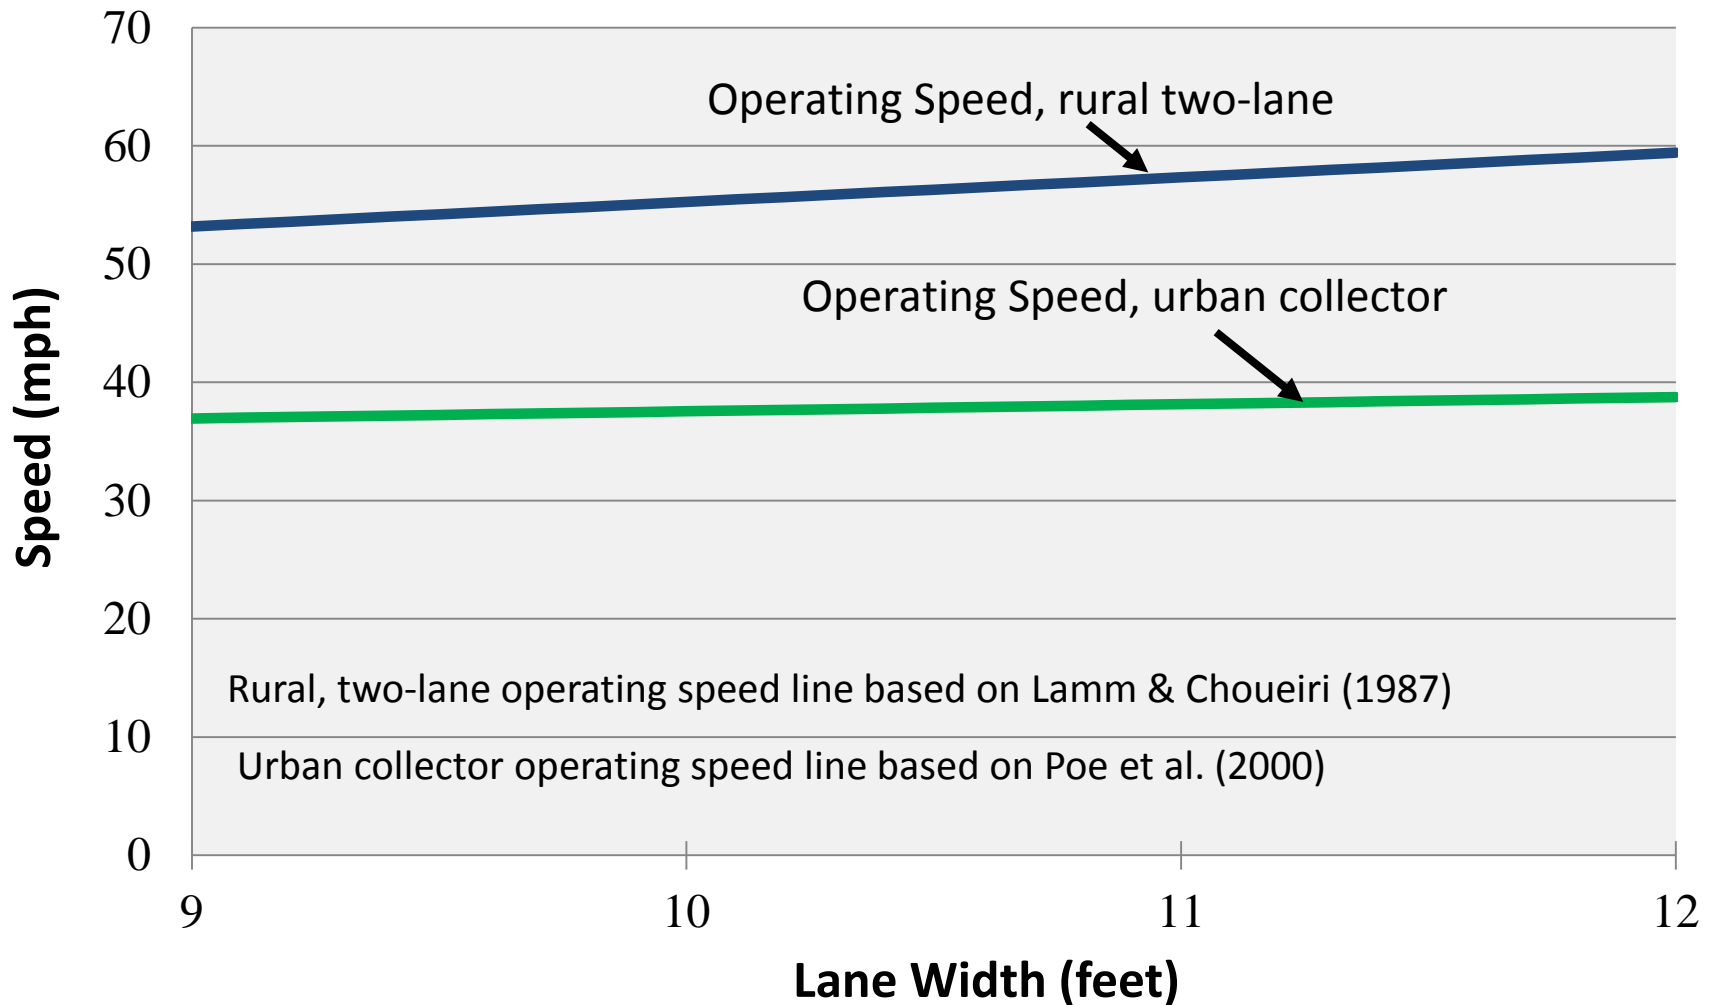


# What is the nature of the speed-safety trade-off?

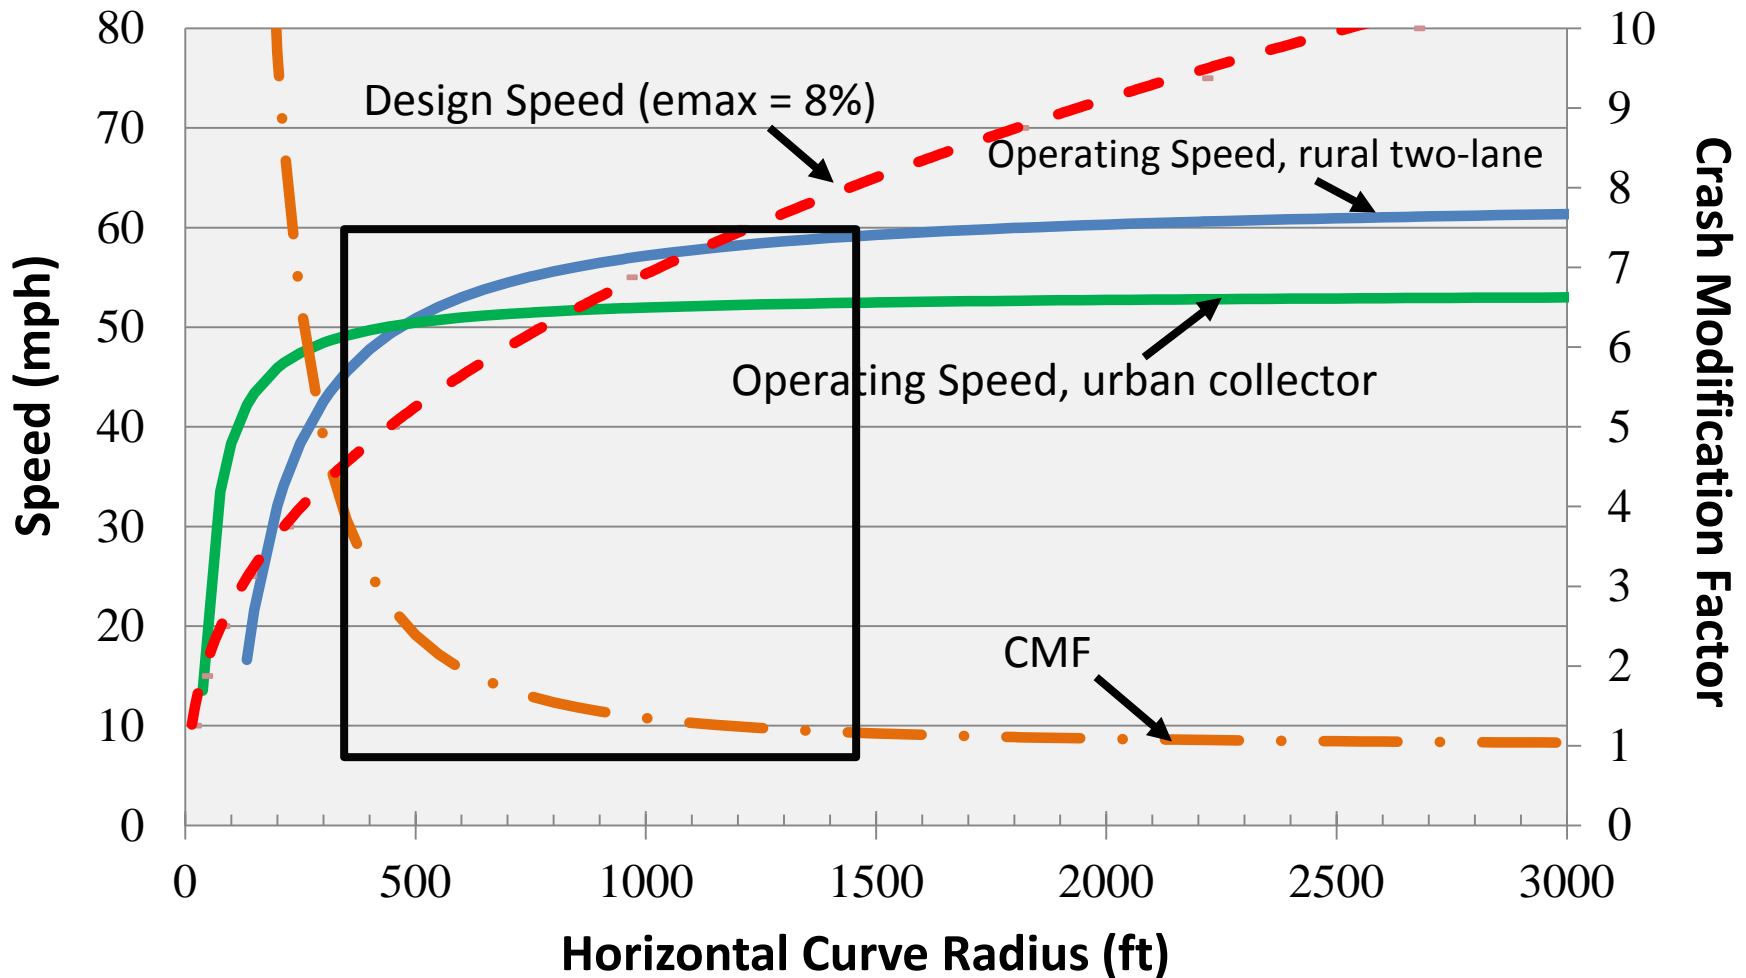



# What is the nature of the speed-safety trade-off?

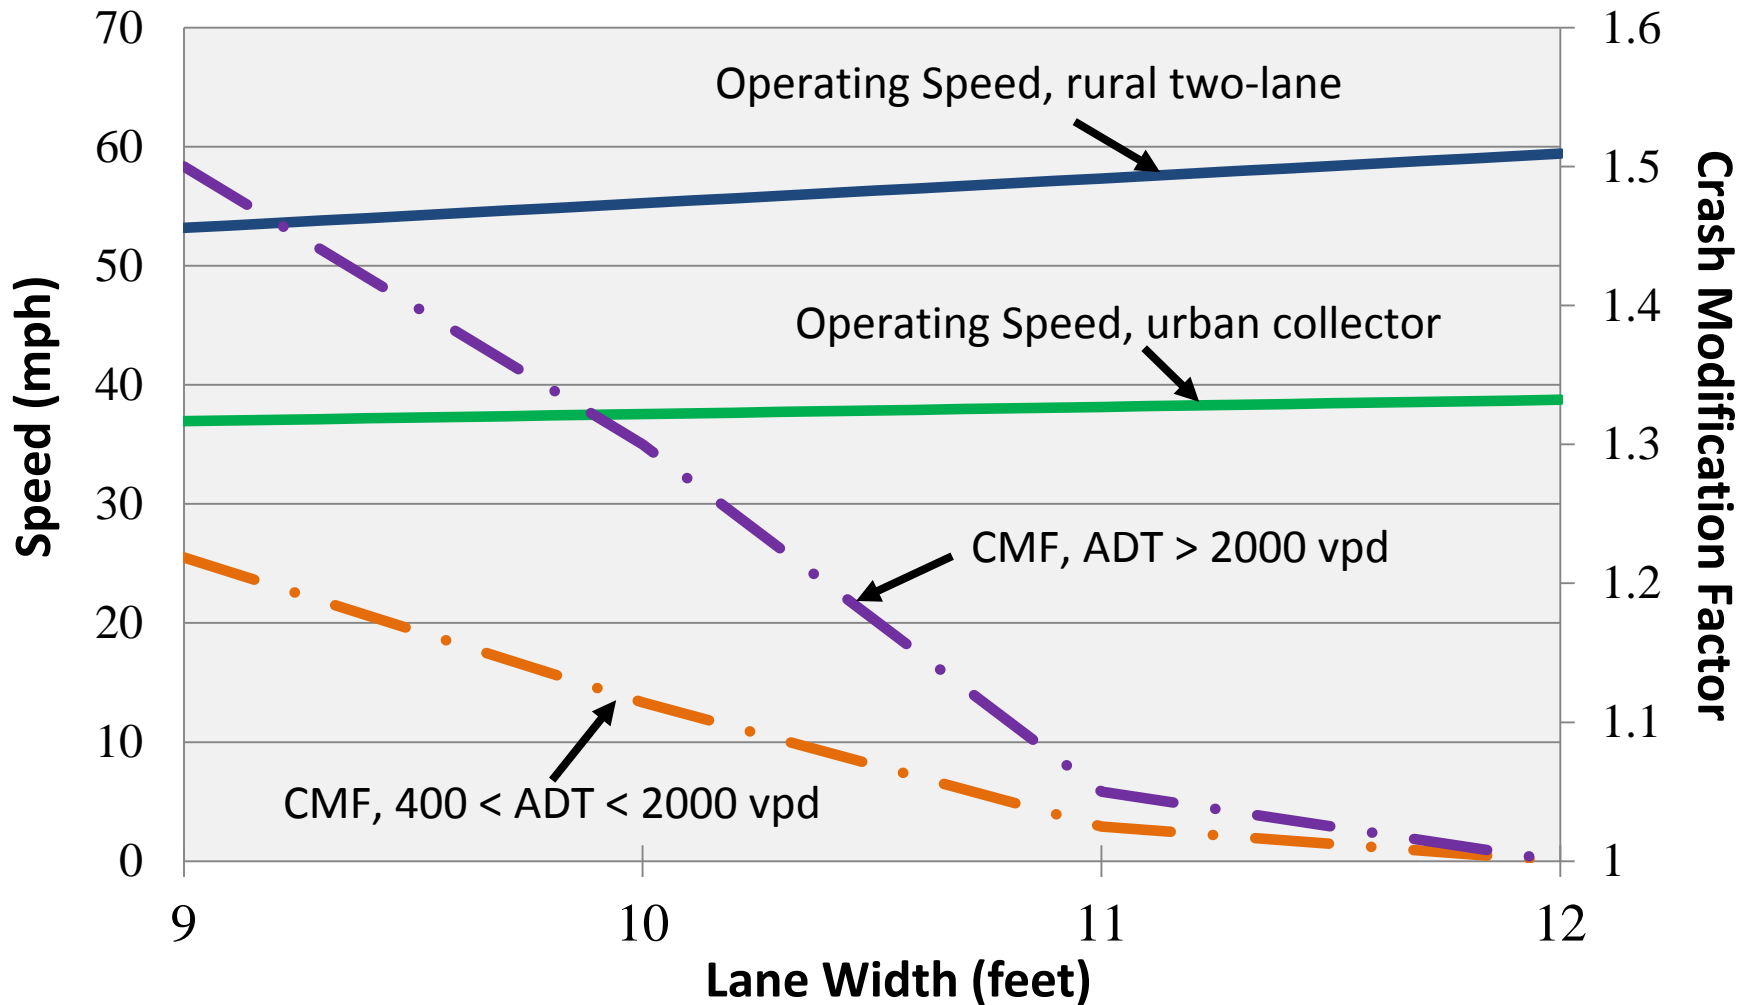

# Summary and Conclusions

- Design speed as “safe speed” still reflected in design speed descriptions
- Operating speeds > design speeds when design speeds < 55mph
- No safety support for ‘desirable’ versus ‘undesirable’ speed relationships
- Five questions offered related to speed management through roadway geometrics

# Geometric Design, Speed, and Safety

Some possible research recommendations...


# From 2009 “Need for Speed” Workshop

We need a process where speed-  
related transportation outcomes of  
highway and street design  
alternatives/decisions are quantified...

# From 2009 “Need for Speed” Workshop



...and the *speed-related decision rationale* are consistent and explainable to a variety of user groups and stakeholders

# Back to the Big Picture

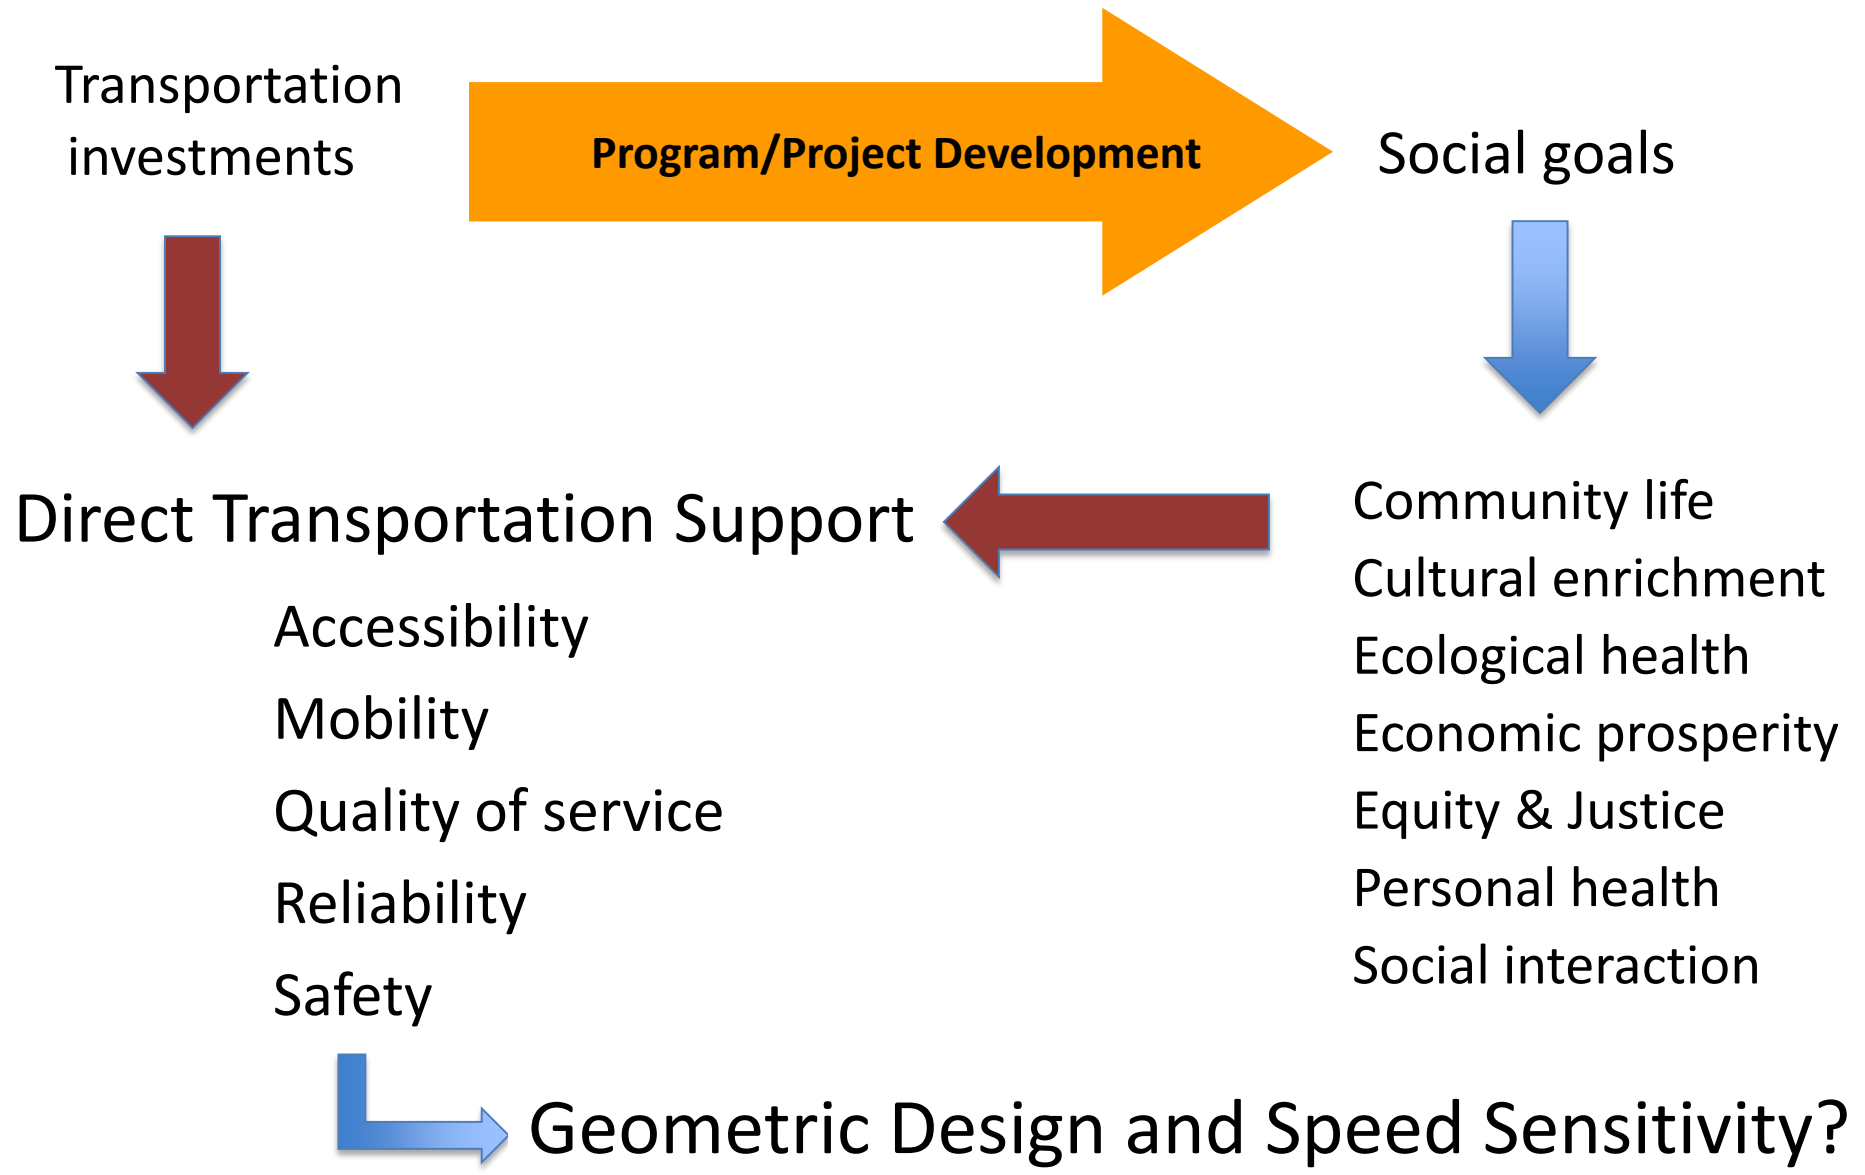


# Recommendations

## Combine Speed and Safety Studies

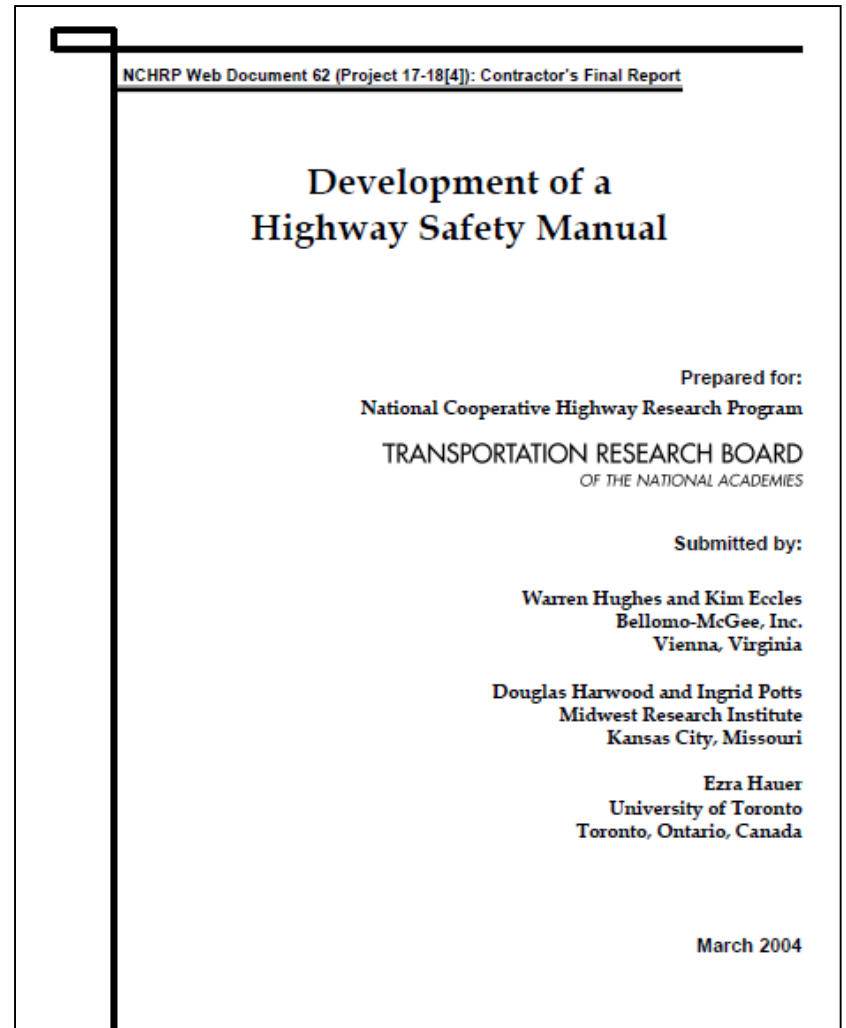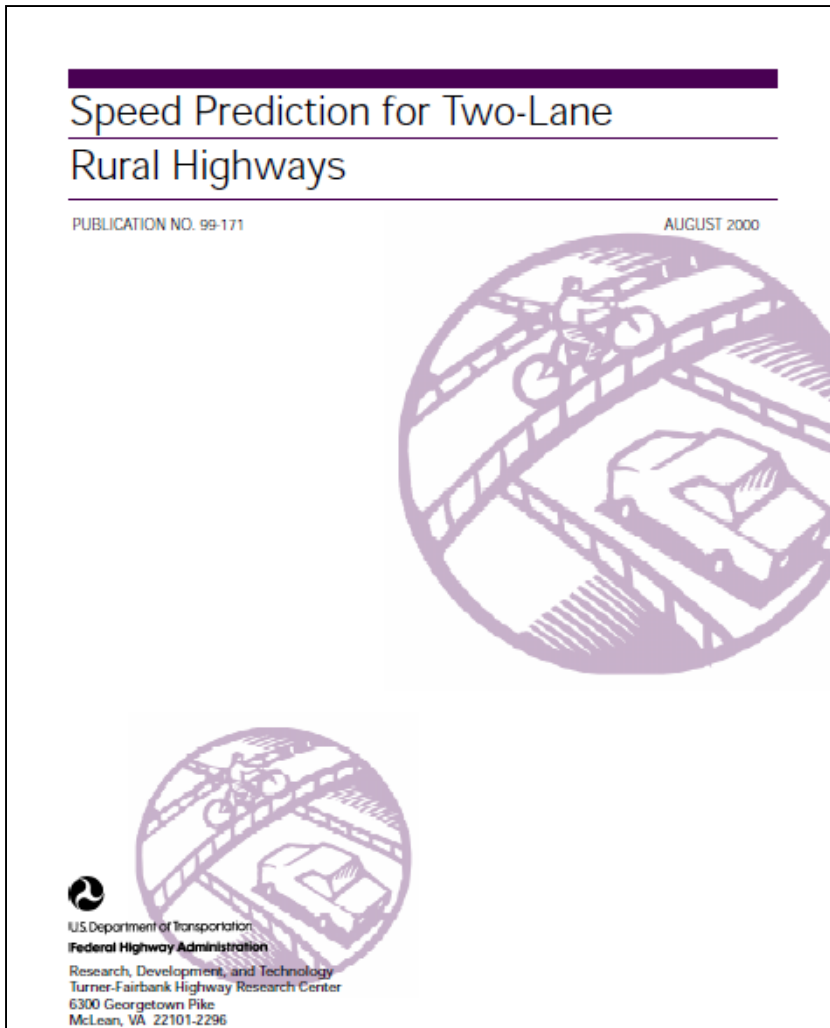

# Recommendations


## Consider Criteria Combinations

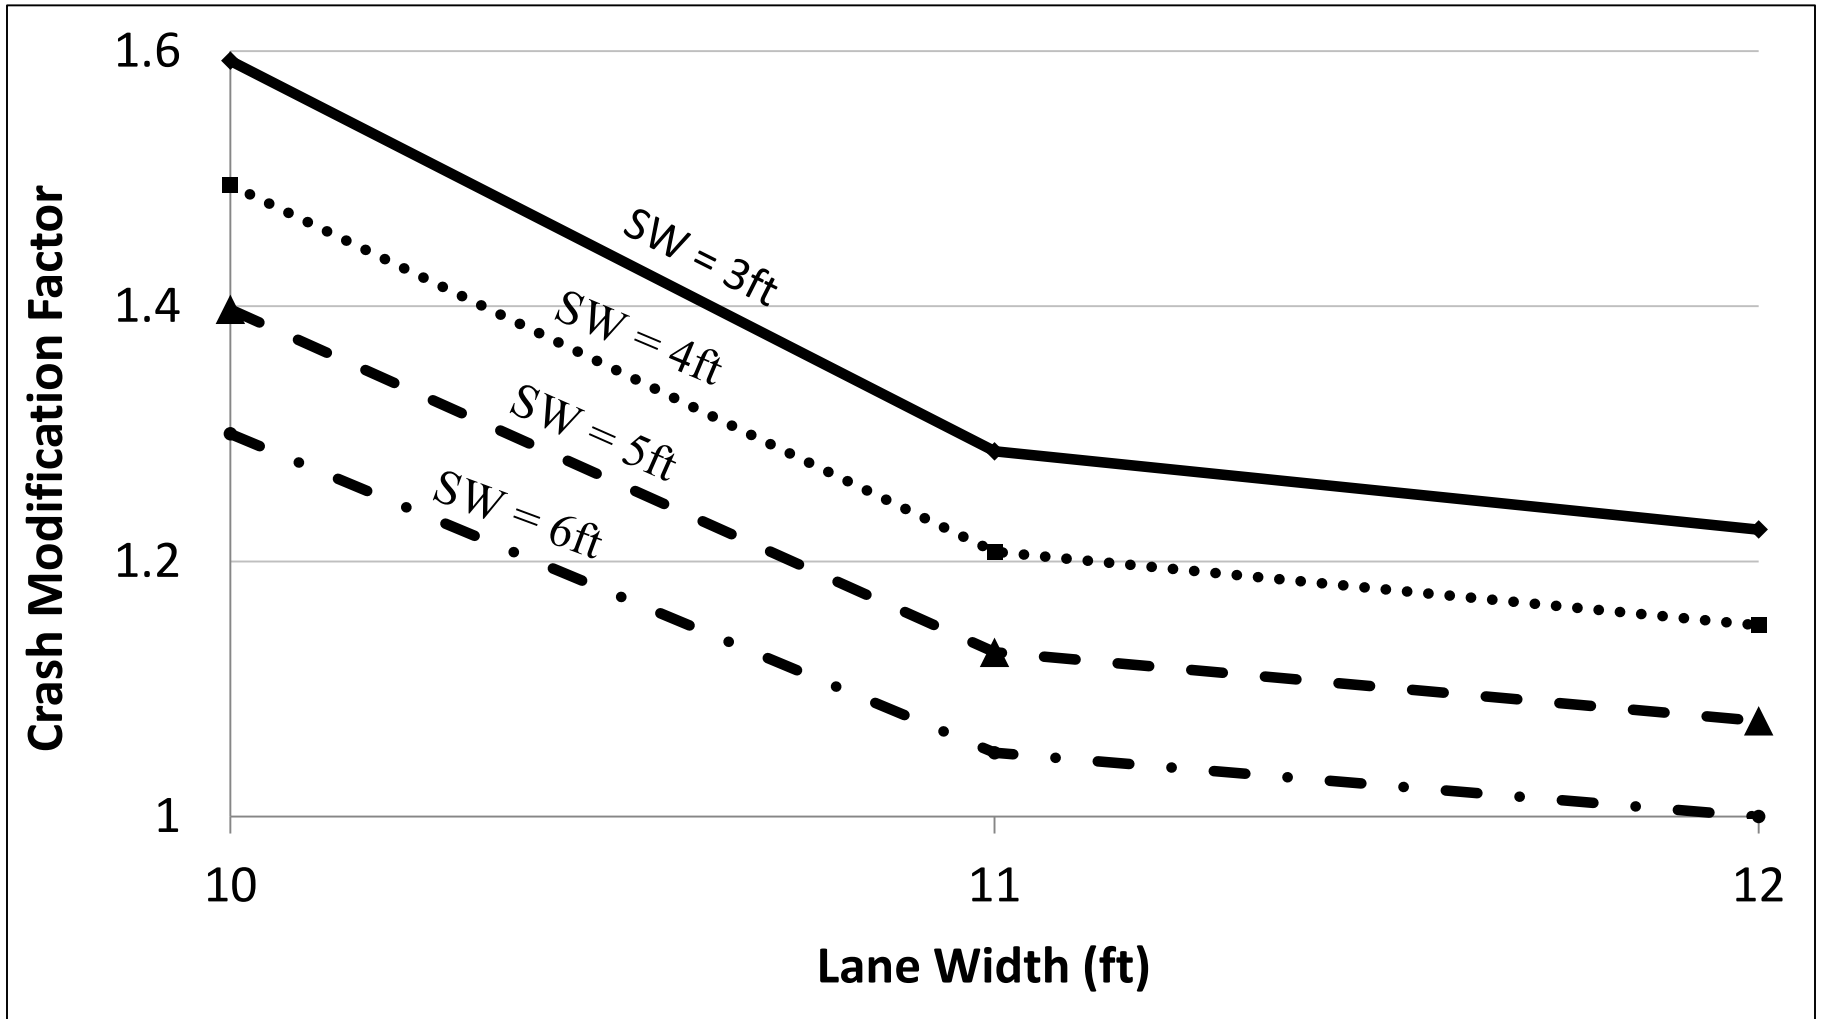




# Recommendations

## Consider Criteria Combinations

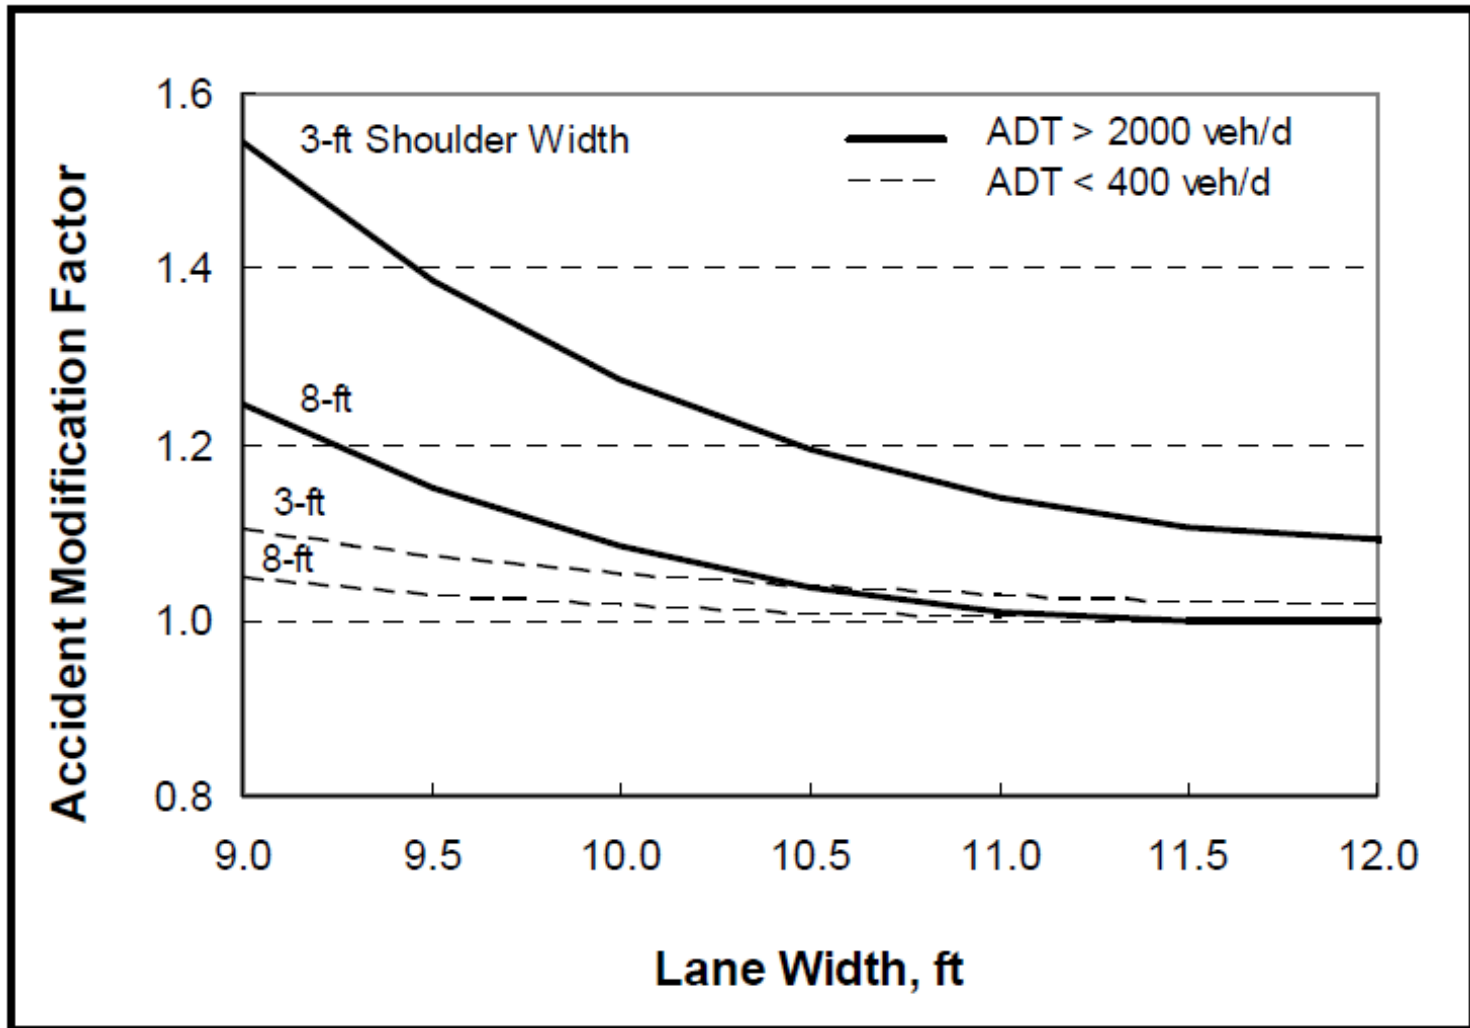


# Recommendations

## Consider Criteria Combinations

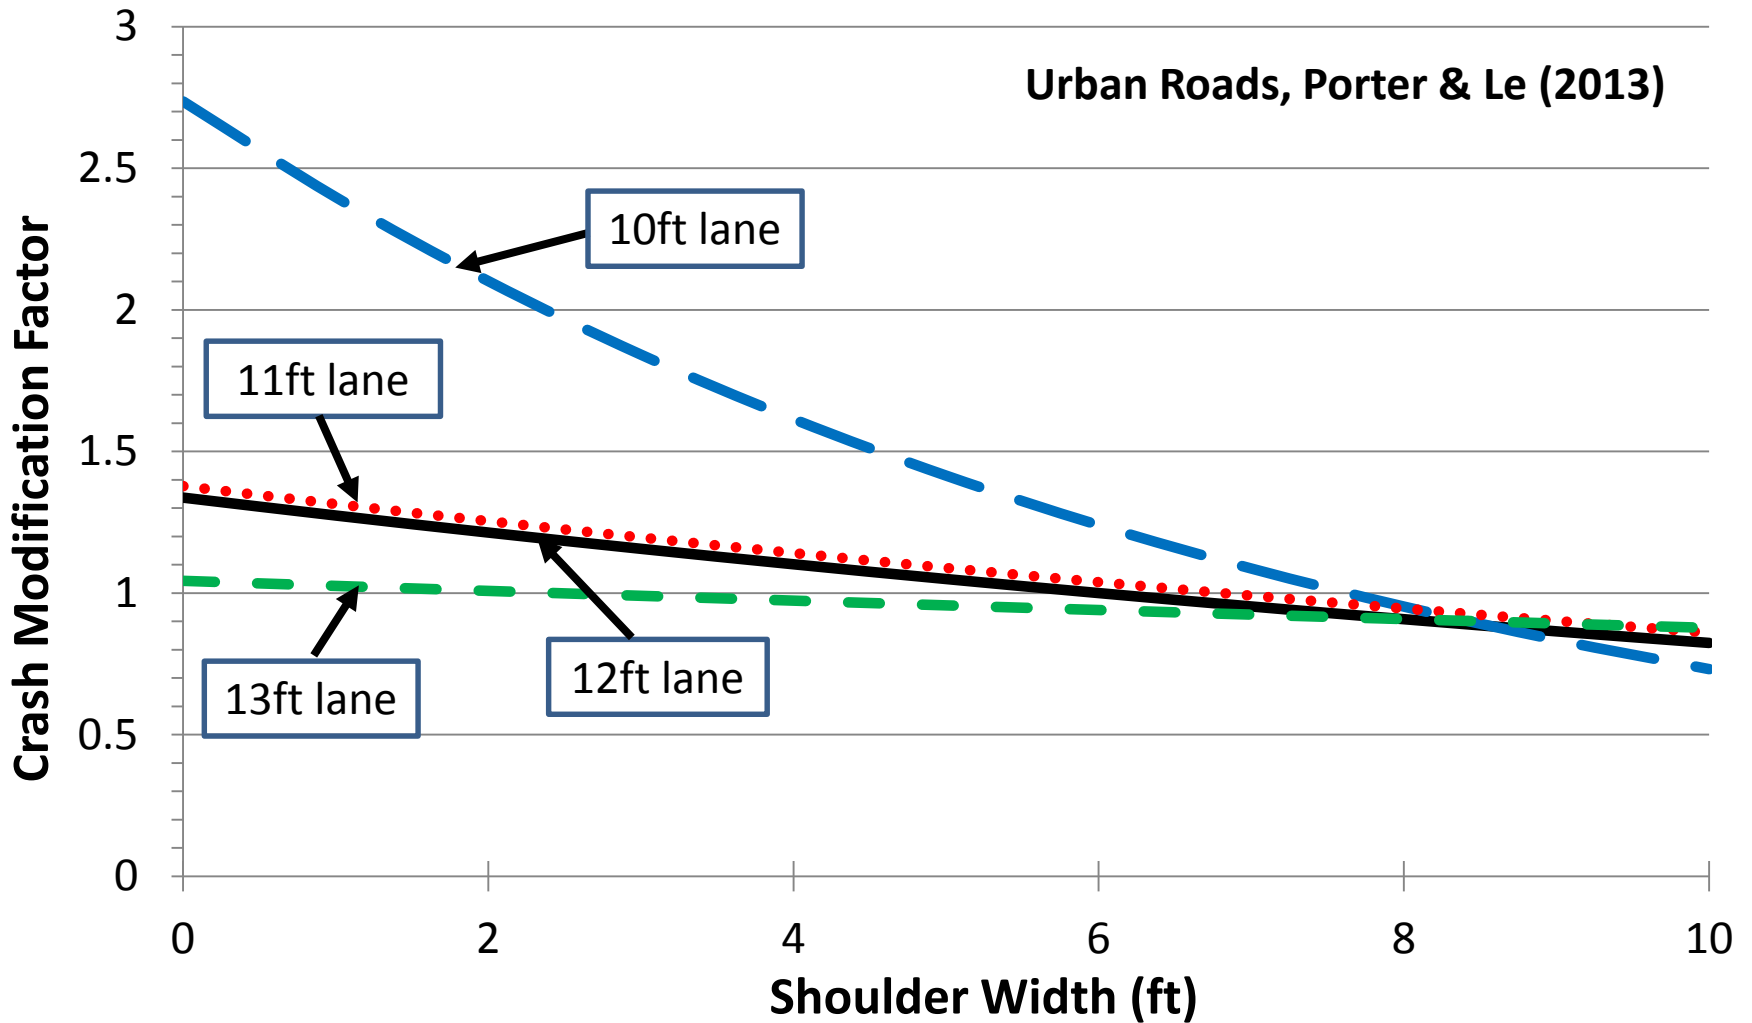

# Recommendations

Consider more than “Site Specific Effects”

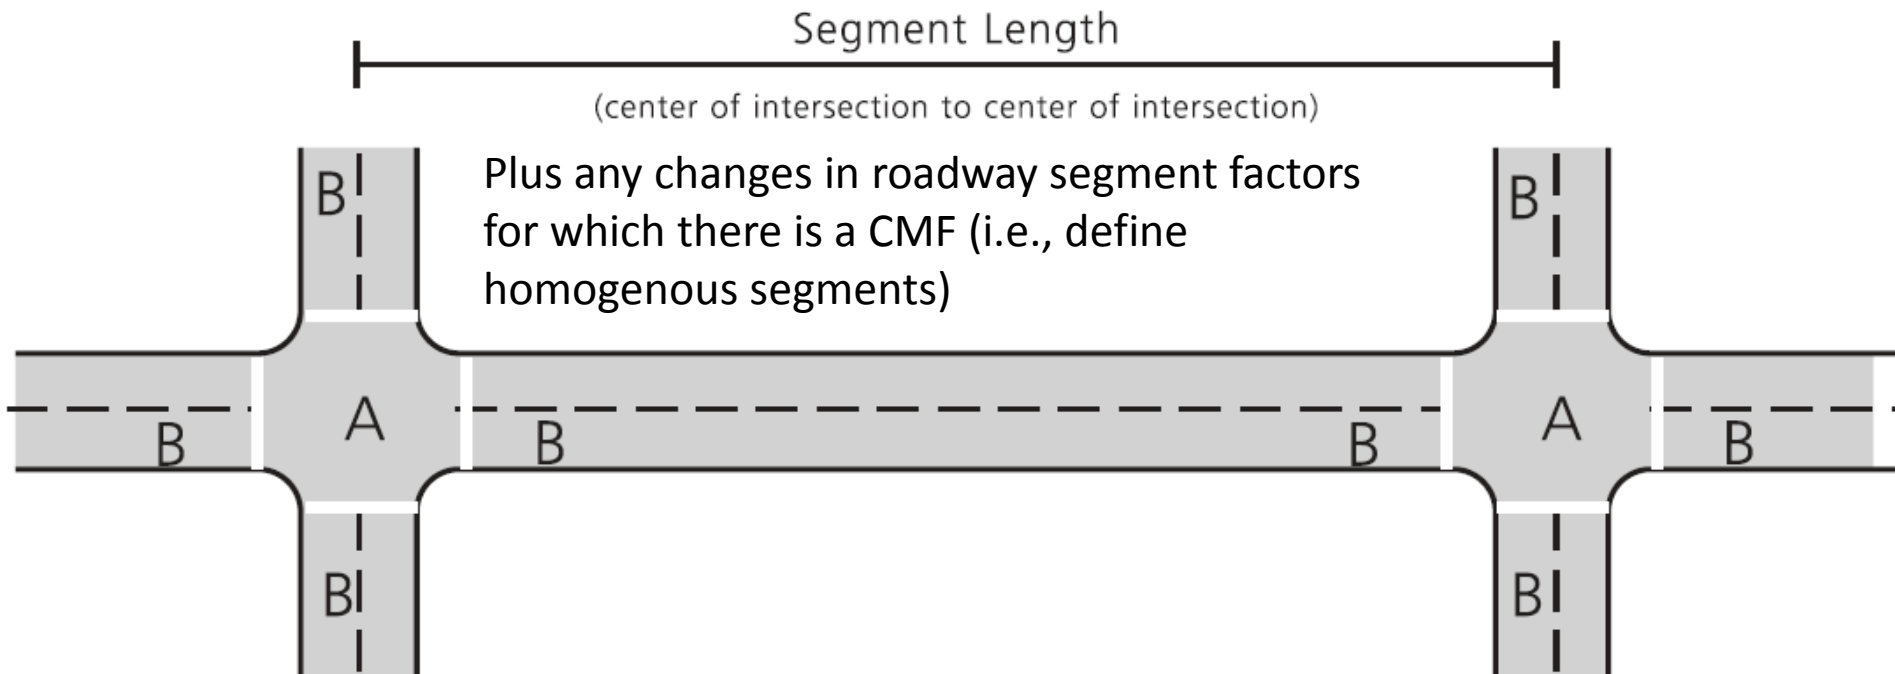

- A All crashes that occur within this region are classified as intersection crashes.
- B Crashes in this region may be segment or intersection related, depending on the characteristics of the crash.

# Questions

R.J. Porter

Assistant Professor

Civil and Environmental Engineering

University of Utah

801.581.1290

[richard.jon.porter@utah.edu](mailto:richard.jon.porter@utah.edu)