Portland State University

PDXScholar

Computer Science Faculty Publications and Presentations

Computer Science

6-2013

Based on Repeated Experience, System for Modification of Expression and Negating Overload from Media and Optimizing Referential Efficiency

Peter R. Badovinatz *IBM*

Veronika M. Megler IBM

Follow this and additional works at: https://pdxscholar.library.pdx.edu/compsci_fac

Part of the Databases and Information Systems Commons Let us know how access to this document benefits you.

Citation Details

Badovinatz, Peter R., and Veronika M. Megler. "Based on repeated experience, system for modification of expression and negating overload from media and optimizing referential efficiency." U.S. Patent No. 7,865,478. 4 Jan. 2011.

This Article is brought to you for free and open access. It has been accepted for inclusion in Computer Science Faculty Publications and Presentations by an authorized administrator of PDXScholar. Please contact us if we can make this document more accessible: pdxscholar@pdx.edu.



US008458141B2

(12) United States Patent

Badovinatz et al.

(54) BASED ON REPEATED EXPERIENCE, SYSTEM FOR MODIFICATION OF EXPRESS AND NEGATING OVERLOAD FROM MEDIA AND OPTIMIZING REFERENTIAL EFFICIENCY

- (75) Inventors: Peter R. Badovinatz, Beaverton, OR (US); Veronika M. Megler, Oak Grove, OR (US)
- (73) Assignee: International Business Machines Corporation, Armonk, NY (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

- (21) Appl. No.: 12/941,065
- (22) Filed: Nov. 7, 2010

(65) **Prior Publication Data**

US 2011/0047490 A1 Feb. 24, 2011

Related U.S. Application Data

- (63) Continuation of application No. 11/144,485, filed on Jun. 4, 2005, now Pat. No. 7,865,478.
- (51) Int. Cl.
- *G06F 17/00* (2006.01)

(10) Patent No.: US 8,458,141 B2

(45) **Date of Patent:** *Jun. 4, 2013

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,778,053 A *	7/1998	Skarbo et al 379/93.21
6,108,637 A *	8/2000	Blumenau 705/7
6,366,882 B1	4/2002	Bijl et al.
6,513,006 B2	1/2003	Howard et al.
6,694,307 B2	2/2004	Julien
2002/0087972 A1*	7/2002	Cragun et al 725/32
2003/0160770 A1*	8/2003	Zimmerman 345/204
2004/0019905 A1	1/2004	Fellenstein et al.
2004/0022520 A1*	2/2004	Kinzer et al 386/69
2004/0073947 A1*	4/2004	Gupta 725/134
2004/0168121 A1	8/2004	Matz
2004/0189696 A1	9/2004	Shirriff
2006/0067296 A1*	3/2006	Bershad et al 370/351

OTHER PUBLICATIONS

Evgeniy Gabrilovich et al., Newsjunkie: Providing personalized newsfeeds via analysis of information novelty, Proceedings of WWW 2004, May 17-22, 2004, New York, NY.

* cited by examiner


Primary Examiner — Dennis Truong

(74) Attorney, Agent, or Firm - Steven L. Bennett

(57) ABSTRACT

Content items are revealed to a user based on whether they have been previously reviewed by the user. A number of content items are thus received over time. The content items may be discrete content items, or may be portions of a content stream, and may be received over different media. For each content item, it is determined whether the content item was previously reviewed by a user. Where the content item was not previously reviewed, the item is revealed to the user, such as by being displayed or announced to the user. Where the content item was previously reviewed, the item is hidden from the user, such as by being deleted, by being replaced with an alternative content item, and so on.

11 Claims, 5 Drawing Sheets



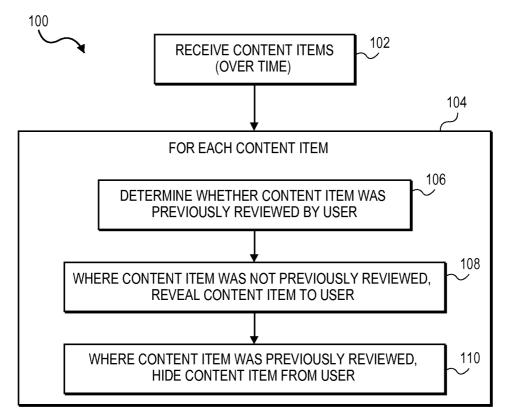
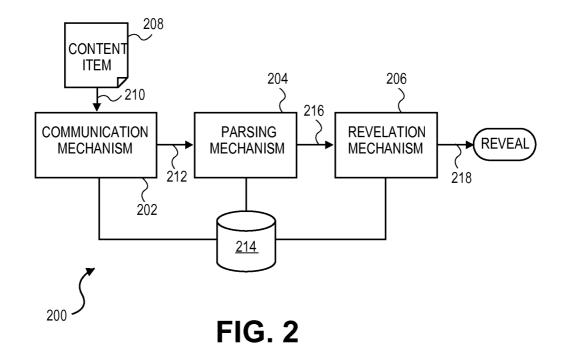


FIG. 1



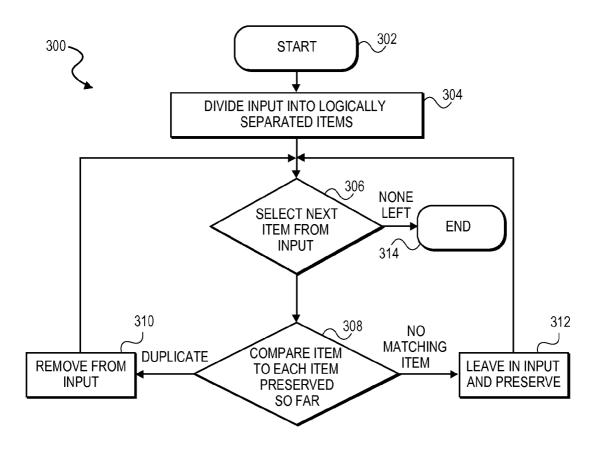


FIG. 3



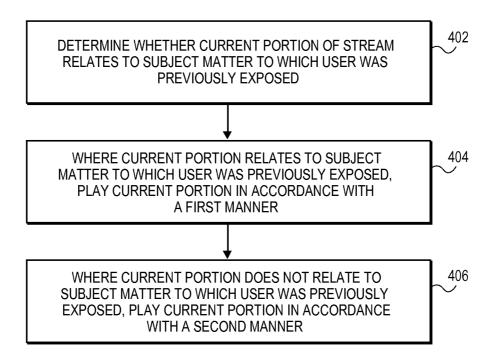




FIG. 4

FIG. 5

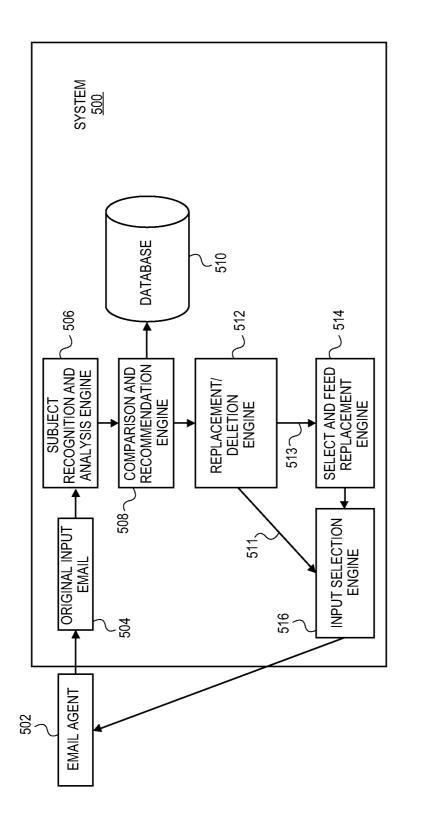

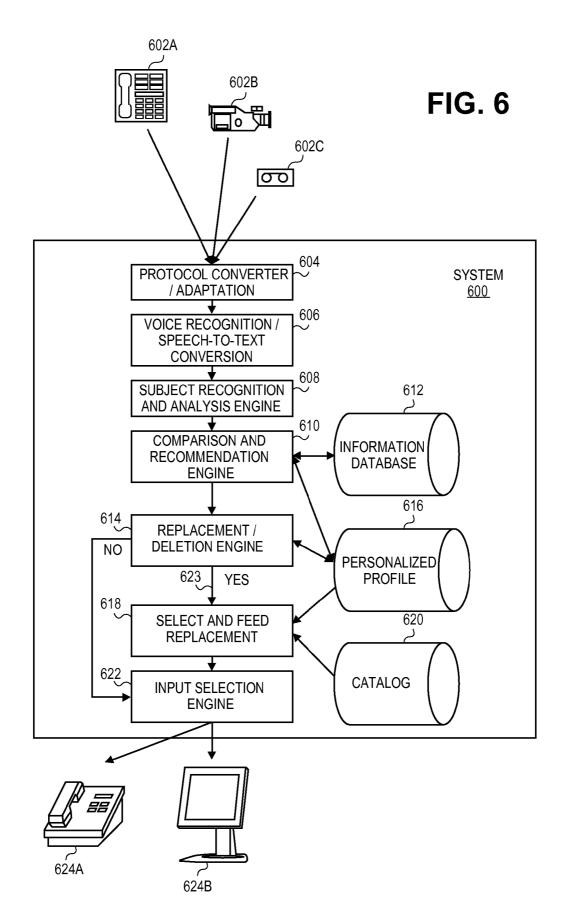

15

BASED ON REPEATED EXPERIENCE, SYSTEM FOR MODIFICATION OF EXPRESS AND NEGATING OVERLOAD FROM MEDIA AND OPTIMIZING REFERENTIAL EFFICIENCY

RELATED APPLICATIONS

The present patent application is a continuation of the previously filed patent application having the same title, filed ¹⁰ on Jun. 29, 2005, and assigned application Ser. No. 11/144, 485.

FIELD OF THE INVENTION

The present invention relates generally to the management of information content, and more particularly to such content management in which content items are revealed to the user based on whether they have been previously reviewed by the $_{20}$ user.

BACKGROUND OF THE INVENTION

Many people today constantly live in a state of information 25 overload. For example, they receive emails at work and at home. They watch television programs at home and listen to the radio in their cars. People have to review voicemail messages left at their home numbers, at their cell phone numbers, and at their work numbers. They have to participate in teleconferences and videoconferences at work. As a final example, people review web sites and weblogs throughout the day, both at home and at work. They may further download and read electronic books, known as "e-books," via specialized electronic book reading devices. ³⁵

There is some prior art to select which information people are exposed to, and how they are exposed to such information. For example, email filters ensure that important messages from coworkers and bosses are flagged or placed in special folders to be reviewed first. Alternatively, users may receive alerts on cell phones, pagers, or personal digital assistant (PDA) devices when certain messages are received.

Users also have been able to select which types of information they are exposed to, based on predefined interests or 45 exposure patterns. For example, personal or digital video recorders record only those television programs that a user has selected, or those television programs that are likely to interest the user. As a result, the user does not have to scan through tens or hundreds of different television channels to 50 select a program to watch.

As another example, many electronic-shopping web sites on the Internet are geared to showing users other potential items to buy based on previously purchased or browsed items. A user who is interested in and has purchased computer-55 networking books, for example, may be shown other types of computer-networking books that he or she might be interested in buying. Sophisticated methodologies can be put in place, so that a user who has purchased one or more types of books may be shown books of a completely different type but in 60 which the user is likely to have an interest.

However, none of the prior art solutions addresses the problem that people are often exposed to the same information throughout the day. A person may bring up a news Internet web site throughout the day, for instance, to learn the latest 65 headlines. More often than not, however, the news items are substantially the same as they were the last time the user

checked them. As a result, the user is constantly barraged with news items that he or she may be interested in, but has already reviewed.

As another example, email messages may arrive that, while ⁵ not exactly duplicative, contain essentially the same information. The user is forced to parse through these messages to determine whether there is any unique content. As a further example, a person may have a series of teleconferences on the same subject matter, with the same or a different group of ¹⁰ people participating in each conference. The user is likely to be exposed to the same information on this subject in the same or different teleconferences, which can be frustrating.

For these and other reasons, therefore, there is a need for the present invention.

SUMMARY OF THE INVENTION

The present invention relates to revealing content items to a user based on whether they have been previously reviewed by the user. A method of the invention receives a number of content items over time. The content items may be discrete content items, or may be portions of a content stream, and may be received over different media.

For each content item, the method determines whether the content item was previously reviewed by a user. Where the content item was not previously reviewed, the item is revealed to the user, such as by being displayed or announced to the user. Where the content item was previously reviewed, the item is hidden from the user, such as by being deleted, by being replaced with an alternative content item, and so on.

A more specific method of the present invention is performed as an audio and/or video stream is being played. Whether a current portion of the stream relates to subject matter to which the user was previously exposed is deter-³⁵ mined. Where the user was previously exposed to this portion of the audio and/or video stream, it is played in accordance with a first manner. For example, the stream portion may be removed, played at a reduced volume, it may be muted, or a different audio and/or video stream may be played in lieu of the current portion of the stream. Where the current portion of the audio and/or video stream does relate to subject matter to which the user has not been previously exposed, it is played in accordance with a second manner. For example, the current portion of the stream may be played at a normal volume level.

A system of the invention includes a communication mechanism, a parsing mechanism, and a revelation mechanism. The communication mechanism receives a number of content items. The parsing mechanism determines whether a user has been previously exposed to each content item. The revelation mechanism reveals each content item to the user in one of at least two different manners, based on whether the user was previously exposed to the content item.

Similarly, an article of manufacture of the invention includes a computer-readable medium, and means in the medium. The computer-readable medium may be a recordable data storage medium, a modulated carrier signal, or another type of computer-readable medium. The means is for determining whether each of a number of content items was previously reviewed by a user, and for revealing each content item to the user in one of at least two different manners, based on whether the content item was previously reviewed by the user.

Embodiments of the invention provide for advantages over the prior art. Whereas prior art approaches used in electroniccommerce web sites, personal or digital video recorders, and email filters select the most relevant content items to the user, such that the content items selected are those that a user 10

wishes to have revealed to him or her, the invention operates in an opposite, albeit complementary, manner. The invention hides from the user content that the user has already reviewed, such as content that the user has already seen or heard. The content that undergoes such a winnowing process by the 5 invention may be the type of content that the user wishes to see or hear, as in the prior art. However, the invention ensures that the user does not see or hear content that he or she has previously seen or heard.

Consider the example of news items on a news-aggregation web site. A user may visit such a web site throughout the day to keep apprised of the current day's news. From visit to visit, however, most of the news items do not change, such that the user is usually exposed to the same news items as in his or her previous visit to the site. Thus, an embodiment of the invention ensures that the news items to which the user was exposed in a previous visit to the web site are not again displayed to the user. In a specific embodiment, news items may be parsed to ensure that they do not contain updated information regarding a story, even if they are with respect to a previously reviewed story, so that the user does not miss 20 updates to an ongoing news event. In particular, the changes to a given news item as it is updated throughout the day, for instance, are shown to the user only if they are semantically additive. That is, if the changes in the news item as the news item is updated are relatively "trivial," such as adding a dif-25 ferent byline to the news item, or replacing the phrase "2%" with "two percent," then such changes are not considered to be substantive updates to the item that warrant exposure to the user

As another example, consider a long teleconference call with many people participating. The user may be exposed to the same information repeatedly throughout the call. However, an embodiment of the invention may mute, or reduce the volume of, the teleconference call if the participants are currently discussing a topic that has been discussed before. When the topic of discussion shifts to something that the user has not heard before, then the invention may un-mute, or increase the volume of, the teleconference call. In a specific embodiment, a topic of discussion is considered to have been heard by the user previously if the speaker is the same speaker who had earlier talked about the topic. Thus, if one person 40 talks about something, and then another person discusses the same thing, this embodiment would not mute the second speaker.

These and other embodiments of the invention therefore provide another mechanism by which users are able to man- 45 age information overload. Information, or content items, that have been presented to the user before are not re-presented to the user, so that the user can concentrate on reviewing new information. One embodiment of the invention may be multimodal, such that it tracks the content items to which a user has 50 been exposed (i.e., the content items that the user has already reviewed) across different media over which the content items are received. For example, this embodiment may determine that a user has seen a particular news item on a television news program in the morning, and therefore hides the same 55 news item from web sites that the user may visit throughout the day, where the news item does not change throughout the day

Still other aspects, advantages, and embodiments of the invention will become apparent by reading the detailed 60 description that follows, and by referring to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The drawings referenced herein form a part of the specification. Features shown in the drawing are meant as illustrative of only some embodiments of the invention, and not of all embodiments of the invention, unless otherwise explicitly indicated, and implications to the contrary are otherwise not to be made.

FIG. 1 is a flowchart of an overview method for revealing content items to a user based on whether they have been previously reviewed by the user, according to an embodiment of the invention, and is suggested for printing on the first page of the patent.

FIG. 2 is a diagram of a rudimentary system for revealing content items to a user based on whether they have been previously reviewed by the user, according to an embodiment of the invention.

FIG. 3 is a flowchart of a method for revealing content to a user based on whether the content has been previously exposed to the user, according to a general embodiment of the invention.

FIG. 4 is a flowchart of a method for revealing content to a user based on whether the content has been previously exposed to the user, and where the content is specifically a content stream divisible into content stream portions, according to an embodiment of the invention.

FIG. 5 is a diagram for revealing content items to a user based on whether they have been previously reviewed by the user, where the content items in question are email messages, according to an embodiment of the invention.

FIG. 6 is a diagram for revealing content to a user based on whether the user has been previously exposed to the content, where the content in question is audio and/or video, according to an embodiment of the invention.

DETAILED DESCRIPTION OF THE DRAWINGS

In the following detailed description of exemplary embodiments of the invention, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration specific exemplary embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention. Other embodiments may be utilized, and logical, mechanical, and other changes may be made without departing from the spirit or scope of the present invention. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims.

Overview

65

FIG. 1 shows an overview method 100 for revealing content items to a user based on whether they have been previously reviewed by the user, according to an embodiment of the invention. Like other methods of the invention, at least some parts of the method 100 may be implemented as one or more computer programs or computer program parts that are stored on a computer-readable medium. The medium may be a volatile or a non-volatile medium, and may also be a magnetic, optical, and/or semiconductor medium, as can be appreciated by those of ordinary skill within the art.

Over time, the method 100 receives content items (102). The content items may be received in different modalities, over different media. That is, multiple sources of content items may be aggregated by the method 100. For instance, the content items may be received over computer connections, telephony networks, cable or satellite television, and so on. The content items may be discrete content items, such as email, news articles received over the Internet, weblog, or "blog," items, newsgroup items, images, web pages, audio files or items, cellular and landline telephone voicemail messages, video files or items, and so on. The content items may alternatively or additionally be part of a content stream, such that each content item is a portion of the content stream. Such content streams can include audio streams, audio recordings, telephone calls, telephone messages, telephone recordings, conference call recordings, video recordings, text streams, 5 text recordings, text messages or messaging streams, and so on

The following is then performed for each content item (104). The method 100 determines whether the content item was previously reviewed by the user (106). For instance, the 10 method 100 may determine whether the content was displayed, announced, or shown to the user, such that the user was exposed to the content. The method 100 may determine whether the content item was actively selected by the user, such as a news story on an Internet web page, or an email 15 message. The method 100 therefore determines whether the user has previously reviewed the content item in such or different manners.

In one embodiment, determining whether the content item was previously reviewed by the user can include determining 20 whether the content item is an update of a previous content item. At least the new portions of the content item are then considered as having not been reviewed previously by the user. For example, a news story may start at the beginning of the day as "child gets lost." Later in the day the news story 25 may be updated so that it includes the information that "an amber alert has been signaled." Finally, the news story may wrap up later that day as "child is found." Each of the news stories relates to the same child, and therefore may be considered the same content item. However, when the content 30 item is updated with new information, at least that part of the content item is considered to have not been previously reviewed by the user.

For instance, at 10 AM the content item may be that the "child gets lost," and may be presented to the user on a news 35 web site, such that the user reviews the content item as a new content item. At 10:30 AM the content item is the same, and when the user browses the news web site, the content item is not displayed to the user, because it has been previously reviewed by the user. At 1 PM the content item may then be 40 updated to include the information that "an amber alert has been signaled." When the user next browses the news web site, the content item is again displayed to the user, either in its entirety, or only the information as to the fact that an amber alert has been signaled. This is because there is some new 45 information present in the content item. Similarly, if at 5 PM the content item is updated to include "child is found," the content item may again be displayed to the user.

Furthermore, in one embodiment, determining whether the content item was previously reviewed by the user can include 50 determining how long ago the content item was previously reviewed by the user. The content item may thus be considered as not having been reviewed by the user if the content item was previously reviewed by the user a length of time ago, based on a number of parameters. These parameters may 55 include interrelated parameters, including a threshold length of time, the user's interest level in the content item, and so on.

For example, a user may be particularly interested in dogs, but not in cats. A first content item relating to dogs may be displayed to the user, such that the user is considered to have 60 reviewed it, and the content item is no longer displayed to the user. A second content item relating to cats may also be displayed to the user, such that the user is considered to have reviewed it, and the content item is no longer displayed to the user.

The user may have a threshold length of time for the representation of already reviewed items of one day for content

65

items relating to subject matter of interest, and three days for content items relating to subject matter that is not of interest.

Two days after the user first saw the first and the second content items the method 100 may again receive these content items. The user is considered to have not previously reviewed the first content item relating to dogs, because the last time the user saw the first content item, two days ago, is greater than the threshold length of time of one day for content items in which the user has an interest. By comparison, the user is considered to still have previously reviewed the second content item relating to cats, because the last time the user saw the second content item, two days ago, is still less than the threshold length of time of three days for content items in which the user does not have an interest.

Furthermore, it is noted that whether a user has been considered as having previously reviewed a content item can be expressed as a combination of degree of change in the content item versus previously reviewed content items, versus the length of time that has elapsed since the last time the user previously reviewed the content items. For example, if the second content item relating to dogs changes less than a threshold percentage, for example twenty percent, as compared to the first content item relating to dogs, then the second content item may still be considered as having been previously reviewed when the second content item is received one day after the first content item. However, if the second content item changes greater than the threshold percentage, then it may not be considered as having been previously reviewed, even if the second content item is received one day after the first content item.

In other words, there can be a secondary time limit, or other such mechanism, that can degrade the change percentage threshold over time. Thus, if two content items are received in relatively short order, the second content item needs to have relatively greater changes in relation to the first content item to be considered as not having been previously reviewed, as compared to the situation where the second content item is received a long time after the first content item. In this latter situation, a long period of time between the receiving of the two content items can mean that the second content item is considered as not having been previously reviewed, even if it contains nearly the same subject matter as the first content item, with little or no change.

Once it has been determined whether a user has previously reviewed a given content item, the method 100 reveals the content item to the user where the content item was considered as not having been previously reviewed by the user (108). Revealing the content item to the user, such that the user is exposed to the content item, can take many different forms. The content item may be displayed, announced, or shown to the user based on the type of content item it is, for instance. By comparison, the method 100 hides, or does not reveal, the content item to the user where it is considered as having been previously reviewed by the user (110).

In one embodiment, such a content item that has been previously reviewed by the user is simply deleted. Alternatively, the content item may not be deleted, but still not be displayed, announced, or shown to the user. Other ways to hide the content item are also possible. For example, a user may have an all-news television channel on during the day, where the news program substantially repeats on a half-hour basis, with new stories added and old stories removed throughout the day. When the user first turns on the television, he or she may hear all the news stories. However, as the news stories are repeated, those stories that the user has previously seen (viz., that he or she has previously reviewed) are muted. That is, the volume of the television is reduced partially or completely, so as not to disturb the user with stories that he or she has already seen.

Furthermore, in another embodiment, alternative content may be revealed or played to the user instead of the content 5 item that has previously been reviewed by the user. For example, a teleconference phone call may be considered as having many different portions, each of which is a separate content item. The same subject matter of the teleconference may be repeated throughout the conference. When the current 10 topic of discussion—that is, the current content item—is a rehash of something that has already been talked about in the conference, hiding such a content item from the user may entail playing music so that the user does not have to listen to the conference call. Such music is alternative content that is 15 played to the user in lieu of the content item.

FIG. 2 shows a rudimentary system 200 for revealing content to a user according to an embodiment of the invention. The system 200 includes a communication mechanism 202, a parsing mechanism 204, and a revelation mechanism 206 in 20 its most basic form. Each of these mechanisms 202, 204, and 206 may be implemented in hardware, software, or a combination of hardware and software. As can be appreciated by those of ordinary skill within the art, the system 200 can further have additional components or mechanisms, in addi-25 tion to and/or in lieu of those depicted in FIG. 2.

The communication mechanism 202 receives a number of content items, such as the content item 208, as indicated by the arrow 210. As has been noted, the content item 208 may be any of a variety of different types of content, may be a portion 30 of a stream of content in one embodiment, and may be received over a variety of different media. The parsing mechanism 204 receives the content item 208 from the communication mechanism 202. The parsing mechanism 204 determines whether the user has been previously exposed to 35 the content item, as has been described in relation to FIG. 1. The parsing mechanism 204 may thus rely upon a storage 214 of previously reviewed content items to which the user has already been exposed. The storage 214 may be purged on a rolling basis, such that content item that have been previously 40 reviewed are stored in the storage 214 for at most a given length of time. The storage 214 may be a volatile or a nonvolatile computer-readable medium.

For example, the parsing mechanism **204** may determine whether the user was previously exposed to the content item **45 208** based whether the content item **208** was previously selected by the user. The parsing mechanism **204** may make its determination based on whether the content item **208** is an updated of a previous content item, such that at least new portions of the content item **208** are considered as not having 50 been reviewed by the user. The parsing mechanism **204** may further make its determination based on how long ago the user was previously exposed to the content item **208**, such that the user is considered as not having been exposed to the item **208** where he or she was previously exposed to the item **208** a 55 length of time ago, as has been described in relation to FIG. **1**.

Once the parsing mechanism **204** makes this determination, it passes the content item **208** to the revelation mechanism **206**, as indicated by the arrow **216**. The revelation mechanism **206** reveals the content item **208** to the user in at 60 least one of two different manners, based on whether the user was previously exposed to the content item **208**, as determined by the parsing mechanism **204**. For instance, where the user was not previously exposed to the content item **208**, one manner by which the revelation mechanism **206** reveals the 65 content item **208** to the user is to display, announce, or show the content item **208** to the user, as indicated by the arrow **218**.

As another example, where the user was previously exposed to the content item **208**, manners by which the revelation mechanism **206** reveal the content **208** to the user is to not display, not announce, or not show the content item **208** to the user, or play alternative content instead. Thus, the hiding of the content item **208** from the user is itself considered a manner of revealing the content item **208** to the user.

General Embodiments

FIG. **3** shows a general method **300** for exposing content to a user based on whether the user has previously reviewed that content, according to an embodiment of the invention. The method **300** is consistent with the method **100** of FIG. **1**. The method **300** starts (**302**), by dividing input received into logically separate content items (**304**). These content items may be discrete content items, such as separate email messages, separate news headings, as well as portions of a content stream, as has been described. A first content item is retrieved from the input (**306**), and is compared to each of the previously received content items (**308**).

If there is a match between the content item retrieved and the previously received content items, then the content item is removed from the input (**310**), and the method **300** repeats at **306** with the next content item in the input. However, if there is not a match between the content item retrieved and the previously received content items, then the content item is left in the input (**312**), and preserved for future comparison, and the method **300** again repeats at **306** with the next content item in the input. At some point, there are no further items in the input, and the method **300** ends (**314**).

The comparison of content items performed in **308** can be as rudimentary as using a UNIX-style "diff" tool, as can be appreciated by those of ordinary skill within the art. That is, the comparison of content items may be simply to determine whether exact duplicates are identified. Additional refinements in other embodiments of the invention may then be employed to remove content items that are substantially similar, but not 100% identical, to previously received content items. For example, one content item may spell out numbers, whereas another content item may not. In one embodiment, if two content items are more than a certain threshold the same, they are considered the same for purposes of the comparison in **308**.

FIG. 4 shows a general method 400 for exposing content to a user based on whether the user has previously reviewed that content, where the content is specifically and audio and/or video stream, according to an embodiment of the invention. Such an audio and/or video stream is more generally referred to as a content stream. A content stream may be a telephone call, a telephone conference, the stream of audio or video, a television program being watched, and so on. The content stream is divisible into a number of portions, such that the method 400 is performed, preferably in real-time, in relation to each portion as it is current.

The method **400** therefore determines whether a current portion of the stream relates to subject matter to which the user was previously exposed (**402**). Where it does, the current portion is played to the user in accordance with a first manner (**404**). For instance, the current portion may be played back at a reduced volume level, the audio may be muted, and/or a different content stream, such as music, may be played back in lieu of the current content stream portion. Where the current portion does not relate to subject mater to which the user was previously exposed, it is played to the user in accordance with a second manner (406). For instance, the current portion may be played back at a normal volume level.

Email Message Embodiment

FIG. 5 shows a system 500 that can be employed for revealing content items to a user based on whether they have been previously reviewed by the user, in relation to content items that are email messages, according to an embodiment of the 10invention. The system 500 is consistent with the system 200 of FIG. 2 that has been described. For instance, in one embodiment, the communication mechanism 202 of FIG. 2 can be or encompass the subject recognition and analysis engine 506 of FIG. 5. The parsing mechanism 204 of FIG. 2 can be or encompass the comparison and recommendation engine 508, the replacement/deletion engine 512, and the select-and-feed replacement engine 514 of FIG. 5. Finally, the revelation mechanism 206 of FIG. 2 may be or encompass the input selection engine 516 of FIG. 5. 20

The system **500** is provided email messages **504** by an email agent **502**. The email agent **502** may be an email application program commonly available as stand-alone computer programs and as part of office suites of computer programs. The email agent **502** may be provided with a custom plug-in 25 to provide the functionality of sending the email messages **504** to the system **500**.

The subject recognition and analysis engine **506** is a component or mechanism implemented in software, hardware, or a combination of software and hardware that divides the email messages **504** into separate emails, and potentially organizes them by subject matter, and so on. The comparison and recommendation engine **508** may also be a component or mechanism implemented in software, hardware, or a combination of software and hardware. The comparison and recommendation engine **508** compares each of the email messages **504** with email messages to which the user has been previously exposed, as has been described.

In one embodiment, the engine **508** can employ a database ⁴⁰ **510** when performing its functionality. The database **510** can store the previously reviewed email messages in one embodiment. However, in another embodiment, the database **510** contains the essential aspects of the information within the previously reviewed email messages. Thus, in this embodiment, rather than comparing a given email message to the previously reviewed email message is compared to the information contained within the previously reviewed email messages. Such a comparison is more nuanced and sophisticated, ⁵⁰ and ensures that an email message can be said to contain information that has already been exposed to the user even if the previous email that contained this information is significantly different.

The result of processing by the comparison and recommen-55 dation engine **508** is a tagging of an email message as containing information to which the user has already been exposed, or not containing information to which the user has already been exposed. (It is noted that the term "tagging" is used in this context, and throughout the patent application, in 60 the sense that the email message is identified, or recognized, as containing information to which the user has already been exposed, such as by setting an appropriate flag, and so on. It is not meant to convey any other utilization of this term, such as mark-up language tags, and so on, as is found in the prior 65 art.) On the basis of this recommendation, a replacement/ deletion engine **512** performs additional functionality. As

with the other engines, the engine **512** can be implemented in software, hardware, or a combination of hardware and software.

The engine **512** can perform three different functions. First, if the email message contains new information that the user has not previously seen, then the replacement/deletion engine **512** routes the email message to an input selection engine **516**, as indicated by the arrow **511**. The input selection engine **516**, also implemented in hardware, software, or a combination of hardware and software, adds the email message to the email messages to be ultimately viewed within the email agent **502**. Thus, email messages are first retrieved by the email agent **502** and sent to the system **500**, but are not viewable by the user except as resent back to the email agent **502** by the input selection engine **516**. The input selection engine **516** thus selects the input that the user is to see within the email agent **502**.

Second, if the email message contains information that the user has already seen, then the replacement/deletion engine 512 may route the email message, as indicated by the arrow 513, to a select-and-feed replacement engine 514, which is similarly implemented in software, hardware, or a combination of hardware and software. The engine 514 selects a replacement email message to be viewed by the user, instead of the original email message received. Such an email message may simply be a placeholder email message that indicates that the original email message has been suppressed, with a link to where the original email message can be viewed if desired by the user. This new email message is then sent to the input selection engine 516 to send to the email agent 502 for viewing by the user. That is, the original email message is not sent, but rather a new, replacement email message is sent for viewing by the user.

Third, if the email message contains information that the 35 user has already seen, then the replacement/deletion engine 512 may alternatively simply delete the email message. In this case, there is no further communication with the input selection engine 516, and the email message in question is never provided in any form to the email agent 502 for viewing by the user. Thus, in this embodiment, the user may not ever see, or be aware of, the email message that contains information that the user previously reviewed. The techniques described in relation to the embodiment of FIG. 5 may be extended. For example, they may be employed in the context of Internet web page searching, so that in response to a search query, users are provided with at least substantially unique results. That is, web pages that contain substantially the same information as one another are removed, such that for any given set of information, typically only a single web page is shown to the user. For example, a given search query may be related to stuccoconstruction homes. Normally, all the search results for that search query would be provided to the user, so that the user has to navigate a large number of web pages, many of which may contain the same information. However, an embodiment of the invention compares the content within the web pages. For instance, if five web pages relate to how to build stuccoconstruction homes, then only one of these five web pages would be revealed to the user. If another three web pages relate to how to maintain stucco-construction homes, then only one of these three web pages would be revealed to the user. Similarly, if seven web pages relate to problems with stucco-construction homes, then only one of these seven web pages would be revealed to the user.

Furthermore, the information stored in the database **510** can be aged over time. For example, if the information within an email message is repeated within another email message an hour later, then in all likelihood the user will not want to see

25

the second email message. However, if the information is repeated within another email message three weeks later, the user may want to see the information again. Thus, as information within the database **510** gets older, it may be deleted from the database **510**. As such, the database **510** stores just ⁵ relatively fresh information, and it no longer stores information of which the user him or herself may no longer be aware.

It is noted that the embodiment of the invention described in relation to email messages in this section of the detailed description is also amenable to implementation in relation to 10 other types of content, such as other types of text, as well as audio and/or video. Likewise, the embodiment of the invention described in the next section of the detailed description in relation to audio and/or video is also amenable to implementation in relation to other types of content, such as email 15 messages and other types of text. It is noted that the embodiment of the invention described in the next section of the detailed description provides for greater complexity than the embodiment of the invention described in this section of the detailed description. However, the less-complex embodiment 20 of this section is nevertheless amenable to implementation in relation to audio and/or video, and similarly the more-complex embodiment of the next section is nevertheless amenable to implementation in relation to text, such as email messages.

Audio and/or Video Embodiment

FIG. 6 shows a system 600 that can be employed for revealing content to a user based on whether the user has previously reviewed the content, in relation to content that is audio 30 and/or video, according to an embodiment of the invention. The system 600 is consistent with the system 200 of FIG. 2 that has been described. For instance, in one embodiment, the communication mechanism 202 of FIG. 2 can be or encompass the protocol converter/adaptation engine 604, the voice 35 recognition/speech-to-text conversion engine 606, and the subject recognition and analysis engine 608 of FIG. 6. The parsing mechanism 204 of FIG. 2 can be or encompass the comparison and recommendation engine 610, the replacement/detection engine 614, and the select-and-feed replace- 40 ment engine 618 of FIG. 6. Finally, the revelation mechanism 206 of FIG. 2 may be or encompass the input selection engine 622 of FIG. 6.

The system 600 is provided with an audio and/or video content stream, hereinafter referred to as a content stream, by 45 one or more content source devices 602A, 602B, and 602C, collectively referred to as the content source devices 602. For instance, the content source device 602A is a telephone, providing a telephone call or a telephone conference call. The content source device 602B is a video recorder, providing 50 video and also optionally audio. The content source device 602C is a tape player, such as a video or an audio tape player. The content source device 602C can further represent a storage device storing a taped event, such as a tape or video made of a conference call or event that is then stored, with a link to 55 it on a web page, such that the device 602C is in such instance a storage device accessible over the Internet. Other content source devices can also be employed. For instance, a video program source device, such as a cable television box, a satellite television box, or a digital-video disc player may also 60 be used.

The content stream, as it is input into the system **600**, is kept fundamentally intact while the system **600** performs its processing. While the content stream is deconstructed and analyzed by the system **600**, it is keyed back to the original 65 stream, via time increments, packets, or by another approach. This allows the system **600** at a later point in time to select

whether to feed the original content stream or a partial replacement content stream, as will be described.

The content stream is specifically input into a protocol converter/adaptation engine **604**, which may be software, hardware, or a combination of software and hardware. For example, it may be desirable to render the original content stream into Voice over Internet Protocol (VoIP), or another protocol. Such conversion or adaptation is performed to simplify the performance of other parts of the system. The voice recognition/speech to text conversion engine **606**, which also may be software, hardware, or a combination of software and hardware, provides further conversion. For instance, speech-to-text conversion is desirable so that subject recognition and analysis can later be performed more easily. Voice recognition can be performed to attempt to identify the current speaker, and so on.

In an embodiment relation to video content streams, the engines **604** and **606** may be replaced by an object/recognition classification engine. Such an engine is software, hardware, or a combination of software and hardware, and is able to identify and classify objects, such as in surveillance video and other types of video streams, to identify and remove relatively irrelevant background movement, such as trees moving in the wind. Objects thus identified as people can then have their own movements analyzed in order to identify and focus on their face, and face recognition can be employed to identify the person in question.

The converted content stream is then delivered to the subject recognition and analysis engine **608**, which is software, hardware, or a combination of software and hardware. The engine **608**, similar to the engine **506** of FIG. **5**, divides the content stream into separate content stream portions, and potentially organizes them by subject matter, and so on. The comparison and recommendation engine **610**, similar to the engine **508** of FIG. **5**, compares each content stream portion against information that has been previously revealed to the user, as has been described. As such, the engine **610**, which may be implemented in software, hardware, or a combination of software and hardware, may use a database **612** in a similar manner to which the engine **508** of FIG. **5** uses the database **510** of FIG. **5**, as has been described.

The engine 610 is more sophisticated than the engine 508 of FIG. 5, however, in that it also relies upon a personalized profile 616. The personalized profile 616 allows a user, in the context of the comparison and recommendation engine 610, to indicate how the comparison of content stream portions against information that has been previously revealed to the user is to be accomplished. For example, the user may desire that subject matter is considered having been reviewed by him or her only in relation to the speaker that articulated the subject matter. That is, if one speaker within a teleconference discusses a given subject, another speaker within the conference discussing the same subject is not considered to be the same information as the first speaker because the speakers are different. Other types of personalization may also be achieved, such as how to age information stored in the database 612, and so on.

The result of processing by the comparison and recommendation engine **610** is a tagging of a content stream portion as containing information to which the user has already been exposed, or not containing information to which the user has already been exposed. On the basis of this recommendation, a replacement/deletion engine **614** performs additional functionality, similar to the functionality performed by the engine **512** of FIG. **5**. The engine **614** may be implemented in software, hardware, or a combination of hardware and software.

The engine 614 performs two different functions. First, if the content stream portion in question contains new information that the user has not previously seen, then the replacement/deletion engine 614 routes this portion to an input selection engine 622, as indicated by the arrow 621. The engine 5 622, also implemented in hardware, software, or a combination of hardware and software, streams the original content stream unmodified to a content output device, such as one of the content output devices 624A and 624B. The content output devices 624A and 624B include a telephone 624A for 10listening to a telephone conference or audio, as well as a display device 624B for viewing video. Other types of content output devices may be employed as well. Thus, where the content stream portion in question contains new information, the engine 614 indicates to the engine 622 that this portion of 15 the content stream should be exposed to the user without modification.

Second, if the content stream portion in question contains information that the user has already seen, then the replacement/deletion engine 614 requests that a select-and-feed 20 replacement engine 618 select an alternative content stream portion to be exposed to the user, or otherwise that the content stream portion in question be modified. The engine 618 is similar to the engine 514 of FIG. 5 in this respect. The engine 618 may select an alternative audio stream or video stream, 25 such as music, to forward to the input selection engine 622 to substitute for the content stream portion in question of the original content stream for output on the content output devices 624A and 624B. The engine 618 may alternatively indicate to the input selection engine 622 that the original 30 content stream as to this content stream portion be modified when output to the content output devices 624A and 624B. For instance, the audio may be muted or played at a lower volume level.

The select-and-feed replacement engine **618** can select the 35 replacement content stream to output in lieu of the content stream portion in question from a catalog **620** of such content streams. For instance, the catalog **620** may be a personalized collection of music selected by the user. The engine **618** may select from the catalog **620** at random, or as indicated by the 40 personalized profile **616**, in one embodiment.

It is noted that the replacement/deletion engine **614** in one embodiment does not perform the third functionality noted in respect to the replacement/deletion engine **512** of FIG. **5**. Namely, the engine **614** in this embodiment does not delete 45 the content stream portion in question when it contains information that the user has already seen, such that the input selection engine **622** is not requested to remove the content stream portion from the content stream. This is so that the user does not think that the content stream itself has ended. Howover, in another embodiment, the engine **614** can delete the content stream portion from the content stream, such that the input selection engine **622** is requested to remove the content stream portion from the content stream.

The input selection engine **622** thus can receive identifiers 55 from the replacement/deletion engine **614** or the select-and-feed replacement engine **618** as to the starting and stopping points of the content stream that identify the current content stream portion. The engine **622** either passes through this portion of the content stream unaltered, deletes this portion, 60 or replaces it with a replacement content stream, as indicated by the engines **614** and **618**. Other ways to identify the current content stream portion may also be employed.

It is noted that some of the additional components of the system **600** of FIG. **6** can be applied to the email messages, or 65 text, embodiment of the system **500** of FIG. **5**. For instance, the personalized profile **616** and the catalog **620** may be used

in conjunction with the engines **508**, **512**, and **514** of FIG. **5** in one embodiment, where the profile **616** indicates how the comparison is to be made by the engine **508** relative to the database **510**, and the catalog **620** stores alternative email messages or text. Similarly, as has been alluded to, the system **500** of FIG. **5** can be used in relation to an audio and/or video stream embodiment. In such instance, the system **500** would operate in substantially the same manner as the system **600** of FIG. **6** has been described, but without the inclusion of the personalized profile **616** or the catalog **620**.

Conclusion

It is noted that, although specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that any arrangement calculated to achieve the same purpose may be substituted for the specific embodiments shown. This application is thus intended to cover any adaptations or variations of embodiments of the present invention. Therefore, it is manifestly intended that this invention be limited only by the claims and equivalents thereof.

We claim:

1. A method comprising:

receiving a plurality of content items, each content item having one or more parts;

for each content item,

determining whether the one or more parts of the content item were previously played back to a user;

- where any part of the content item was not previously played back to the user, playing back to the user just the any part of the content item that was not previously played back to the user automatically without the user having to individually select the any part of the content item for playback; and,
- where the one or more parts of the content item were previously played back to the user, hiding the one or more parts of the content item from the user at least by playing back alternative content instead of the one or more parts of the content item automatically without the user having to individually select the alternative content for playback,
- wherein the alternative content is not part of the plurality of content items.

2. The method of claim 1, wherein receiving the plurality of content items over time comprises receiving the plurality of content items over a plurality of different media.

3. The method of claim **1**, wherein receiving the plurality of content items over time comprises receiving a plurality of discrete content items.

4. The method of claim 3, wherein each discrete content item comprises at least one of: an audio item; a telephone message; and, a video item.

5. The method of claim **1**, wherein receiving the plurality of content items over time comprises receiving a content stream, such that the content items are each a portion of the content stream in that the content stream is divisible into a plurality of portions, each portion corresponding to one of the content items.

6. The method of claim 5, wherein the content stream comprises at least one of: an audio stream; an audio recording; a telephone call; a conference call; a telephone message; a telephone recording; a conference call recording; a video stream; a video recording; and, a video program.

7. The method of claim 1, wherein determining whether the content item was previously played back to the user comprises determining whether the content item is an update of a

previous content item, such that at least new portions of the content item are considered as not having been played back to the user.

8. The method of claim 1, wherein determining whether the content item was previously reviewed by the user comprises ⁵ determining a length of time ago when the content item was previously played back to the user, such that the content item is considered as not having been played back to the user where the length of time ago when the content item was previously played back to the user exceeds a threshold, based ¹⁰ on one or more parameters.

- **9**. A system comprising:
- a parsing mechanism to determine whether one or more parts of each content item of a plurality of content items were previously played back to a user; and,
- a revelation mechanism to play back each content item to the user in one of at least two different manners, based on whether each content item was previously played back to the user, where one of the two different manners comprises playing back alternative content instead of the content item, such that the alternative content is played back automatically and without the user having to individually select the alternative content for playback where the one or more parts of a given content item were previously played back to the user, instead of and in lieu of playing back the one or more parts of the given content item again;
- wherein another of the two different manner comprises playing back any part of the given content item to the user automatically and without the user having to individually select the any part of the content item for playback, where the any part of the given content item was not previously played back to the user,

- wherein the parsing mechanism and the revelation mechanism are implemented at least in hardware, and
- wherein the alternative content is not part of the plurality of content items.

10. The system of claim **9**, further comprising a communication mechanism to receive the content items over a plurality of different media.

11. An article of manufacture comprising:

- a non-transitory computer-readable recordable data storage medium; and,
- means in the medium for determining whether one or more parts of each of a plurality of content items were previously played back a user, and for playing back each content item to the user in one of at least two different manners, based on whether the content item was previously played back to the user, where one of the two different manners comprises playing back alternative content instead of the content item, such that the alternative content is played back automatically and without the user having to individually select the alternative content for playback where the one or more parts of a given content item of the plurality of content items were previously played back to the user, instead of and in lieu of playing back the one or more parts of the given content item:
- wherein the alternative content is not part of the plurality of content items, and
- wherein another of the two different manner comprises playing back any part of the given content item to the user automatically and without the user having to individually select the any part of the content item for playback, where the any part of the given content item was not previously played back to the user.

* * * * *